1-1971030-4 V ACTIVE

GRACE INERTIA 2.0

TE Internal #: 1-1971030-4

Rectangular Connector Housings, Wire-to-Board, 4 Position, .079 in

[2 mm] Centerline, 1 Row, Nylon 66 GF, Plug, Socket, GRACE

INERTIA 2.0

View on TE.com >



Connectors > Rectangular Connectors > Rectangular Connector Housings > STD Temp Sig GRACE INERTIA Plug











Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 2 mm [.079 in]

Number of Rows: 1

Housing Material: Nylon 66 GF

All STD Temp Sig GRACE INERTIA Plug (63)

Features

Product Type Features

| Connector System | Wire-to-Board |
|-----------------------------------|---------------|
| Connector & Housing Type | Plug |
| Sealable | No |
| Connector & Contact Terminates To | Wire & Cable |
| Configuration Features | |
| Number of Cavities | 4 |
| Number of Positions | 4 |
| Number of Rows | 1 |
| Electrical Characteristics | |
| Operating Voltage | 50 VAC |
| Contact Features | |
| Contact Layout | Inline |



| Contact Type | Socket |
|--------------|--------|
| | |

Mechanical Attachment

Housing Features

| Housing Color | Red |
|--------------------|---------------|
| Centerline (Pitch) | 2 mm[.079 in] |
| Housing Material | Nylon 66 GF |

Dimensions

| Connector Height | 7.9 mm[.311 in] |
|------------------|------------------|
| Product Width | 6.75 mm[.266 in] |
| Product Length | 9.54 mm[.375 in] |

Usage Conditions

| Operating Temperature Range | -30 - 105 °C[-22 - 221 °F] |
|-----------------------------|----------------------------|
|-----------------------------|----------------------------|

Operation/Application

| Halogen Free | No |
|---------------------|--------|
| Circuit Application | Signal |

Identification Marking

| Circuit Identification Feature | Without | |
|--------------------------------|---------|--|

Packaging Features

| Packaging Quantity | 400 |
|--------------------|---------|
| Packaging Method | Package |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC |



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts














Also in the Series | GRACE INERTIA 2.0

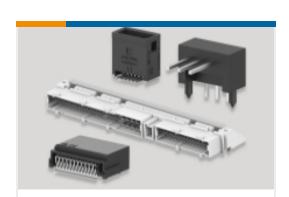





Rectangular Connector Housings(20)




Standard Rectangular Connectors(18)



Wire-to-Board Connector Assemblies & Housings(1)



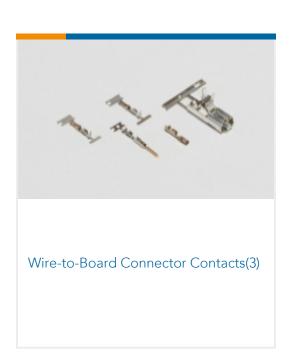

Customers Also Bought









Documents

Product Drawings

4POS Plug Housing for GIC 2.0 EV Series

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1971030-4_F_c-1-1971030-4-f.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1971030-4_F_c-1-1971030-4-f.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1971030-4_F_c-1-1971030-4-f.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

Rectangular Connector Housings, Wire-to-Board, 4 Position, .079 in [2 mm] Centerline, 1 Row, Nylon 66 GF, Plug, Socket, GRACE INERTIA 2.0

