

OX4150A-LZ-1-25.000-3.3-7



ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Nominal Frequency	f_o		25.000			MHz
Supply Voltage	V_s	$V_s \pm 5\%$ @ 25°C	3.135	3.3	3.465	V
Power Consumption	P_s	Steady state, @ 25°C			1.1	W
	$P_{s,w}$	During warm-up, @ 25°C			3.0	W
Warm-up Time	t_w	$T_a = +25^\circ\text{C}$ within $\pm 0.1\text{ppm}$ of final frequency with reference after 1 hours on			5	min
Frequency Calibration	$\Delta f/f_o$	$T_a = +25^\circ\text{C}$, after 15mins power on ref. to nominal frequency and within 90 days storage.	-0.1		+0.1	ppm
Frequency Stability vs. Temperature	$\Delta f/f_o (T_a)$	$T_a = 0^\circ\text{C} \dots +70^\circ\text{C}$, measurement referenced to 25°C	-10		+10	ppb
Frequency Stability vs. Supply Voltage	$\Delta f/f_o (\Delta V_{CC})$	$T_a = 25^\circ\text{C}$, $V_s \pm 5\%$, load=15pF	-2		+2	ppb
Frequency Stability vs. Load Change	$\Delta f/f_o (\Delta I)$	Load change, max.: 5%	-2		+2	ppb
Short Term Stability		After power on 1 hour, in still air			0.01	ppb/s
Aging, after 30 days of operation	$\Delta f/\Delta t_d$	Daily	-2		+2	ppb
	$\Delta f/\Delta t_y$	First year	-100		+100	ppb
	$\Delta f/\Delta t_y$	10 Years	-500		+500	ppb
Operating Temperature Range	T_a		0		+70	°C
Storage Temperature Range	$T_{(stg)}$	Absolute max	-55		105	°C
Phase Jitter		10Hz to 12.5MHz		1		ps

HCMOS OUTPUT CHARACTERISTICS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Output Levels	VOL	$V_{CC} = 3.3\text{V}$, load = 15pF			0.33	V
	VOH	$V_{CC} = 3.3\text{V}$, load = 15pF	2.97			
Duty Cycle	DC	load = 15pF	45		55	%
Rise/Fall Time	t_r/t_f	10% ~ 90% V_{out}			6	ns
Load				15		pF
Spurious					-80	dBc

OX4150A-LZ-1-25.000-3.3-7**PHASE NOISE**


PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
@1 Hz Offset	$\text{£} (\Delta f)$				-80	dBc/Hz
@10 Hz Offset	$\text{£} (\Delta f)$				-110	dBc/Hz
@100 Hz Offset	$\text{£} (\Delta f)$				-135	dBc/Hz
@1 kHz Offset	$\text{£} (\Delta f)$				-145	dBc/Hz
@10 kHz Offset	$\text{£} (\Delta f)$				-150	dBc/Hz
@100 kHz Offset	$\text{£} (\Delta f)$				-150	dBc/Hz

ENVIRONMENTAL MECHANICAL CONDITIONS

Storage Temperature range	-55°C to +105°C
Drop Test	The test shall be carried out as the provisions of the IEC60028-2-32 test Ed. 10cm height, 3 times on hard board with thickness of 3cm
Bumping Test	Device are bumped to three mutually perpendicular axes at peak acceleration of 400m/s ² , each 4000±10times, 6ms pulse duration time
Vibration Test	Frequency range: 1Hz-4Hz-100Hz-200Hz Acceleration: 0.0001g ² /Hz-0.01g ² /Hz-0.01g ² /Hz-0.001g ² /Hz Grms=1.15g Sweep time: 30 minutes (perpendicular axes each sweep time)
Mechanical Shock	100g, 6mS duration, 1/2 sine wave, 3 shocks each direction along 3 mutually perpendicular planes.
Thermal Shock	0.5h@-40°C, 0.5h@+85°C, Note: the changing time < 30 seconds, cycling for 100 times

MECHANICAL DIMENSIONS AND PIN FUNCTIONS

OX4150A-LZ-1-25.000-3.3-7

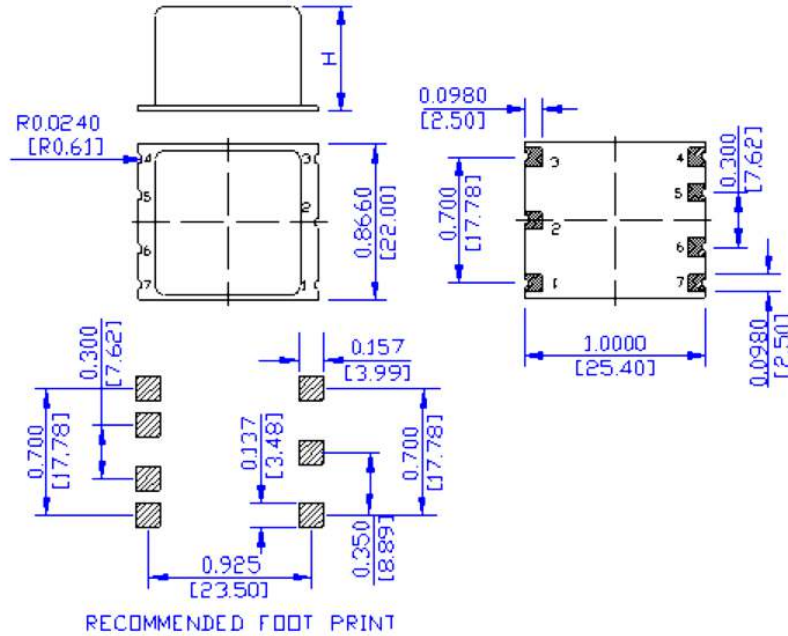

HEIGHT, MAX. "H":
0.504" / 12.8mm

OUTLINE TOLERANCE:
±0.015" / 0.4mm
(Unless otherwise specified)

PIN	SYMBOL	FUNCTION
1	NC	No Connect
2	NC	No Connect
3	V _s	Supply Voltage
4	OUTPUT	RF Output
5	NC	No Connect
6	NC	No Connect
7	GND	Case/Ground

	Signed	Date
Created	CP	March 19, 2015
Eng. approved	SP	March 19, 2015
REV A	Initial Release	
B	CP, March 03, 2021 Updated to the new specs level	