

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Assembled, halogen-free round cable; controller: Siemens SIMATIC® ET 200SP HA; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (2x 15-position); cable length: 8 m



## Commercial data

Item number	1276390
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C421
Product key	CK2155
GTIN	4063151470357
Weight per piece (including packing)	1,022.4 g
Weight per piece (excluding packing)	1,022.4 g
Customs tariff number	85444290
Country of origin	DE

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

## Technical data

### Product properties

Product type	System cable
--------------	--------------

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP00
Degree of protection (Installation location)	≥ IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 70 °C (fixed installation) -10 °C ... 70 °C (flexible installation)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m

### Electrical properties

Operating voltage (AC)	≤ 30 V AC
Operating voltage (DC)	≤ 60 V DC
Nominal operating mode	100% operating factor
Current (Per path, 50°C)	≤ 1 A (Uncoiled, see derating)
Current (Per path, 70°C)	≤ 0.6 A (Uncoiled, see derating)

#### Supported controller SIEMENS ET 200SP HA

Suitable terminal block	6DL1193-6TP00-0BH1
	6DL1193-6TP00-0DH1
	6DL1193-6TP00-0BM1
	6DL1193-6TP00-0DM1
Suitable I/O module	6DL1131-6BH00-0PH1 (Terminal Block H1/M1)
	6DL1132-6BH00-0PH1 (Terminal Block H1/M1)

### Cable/line

Cable length	8 m
Number of positions	14
Shielded	no
Conductor type	Assembled, halogen-free round cable
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Conductor cross section	14x 0.14 mm <sup>2</sup>
Wire diameter incl. insulation	1 mm ±0.03 mm
External cable diameter	5.8 mm ±0.4 mm
Outer sheath, material	halogen-free (type 2)
External sheath, color	gray
Conductor material	Tin-plated Cu litz wires
Cable resistance	≤ 145 Ω/km (20 °C)

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

Insulation resistance	≥ 20 MΩ*km (20 °C)
Smallest bending radius, fixed installation	50 mm
Smallest bending radius, movable installation	93 mm
Max. bending cycles	5000 (at a radius of ≥ 15x outside diameter)
Halogen-free	yes
Flame resistance	IEC 60332-1-2 (raw cable)
	VDE 0842, Part 332-1-2 (raw cable)
	IEC 60332-3-22 (raw cable)
Resistance to oil	can withstand occasional splashes (raw cable)

## color code

D-SUB 37 X1 (1)	D-SUB15 X2 (1) = black
D-SUB 37 X1 (2)	D-SUB15 X2 (2) = brown
D-SUB 37 X1 (3)	D-SUB15 X2 (3) = red
D-SUB 37 X1 (4)	D-SUB15 X2 (4) = orange
D-SUB 37 X1 (5)	D-SUB15 X2 (5) = yellow
D-SUB 37 X1 (6)	D-SUB15 X2 (6) = green
D-SUB 37 X1 (7)	D-SUB15 X2 (7) = blue
D-SUB 37 X1 (8)	D-SUB15 X2 (8) = violet
D-SUB 37 X1 (17)	D-SUB15 X2 (9) = gray
D-SUB 37 X1 (36)	D-SUB15 X2 (10) = white
D-SUB 37 X1 (9)	D-SUB15 X3 (1) = black
D-SUB 37 X1 (10)	D-SUB15 X3 (2) = brown
D-SUB 37 X1 (11)	D-SUB15 X3 (3) = red
D-SUB 37 X1 (12)	D-SUB15 X3 (4) = orange
D-SUB 37 X1 (13)	D-SUB15 X3 (5) = yellow
D-SUB 37 X1 (14)	D-SUB15 X3 (6) = green
D-SUB 37 X1 (15)	D-SUB15 X3 (7) = blue
D-SUB 37 X1 (16)	D-SUB15 X3 (8) = violet
D-SUB 37 X1 (18)	D-SUB15 X3 (9) = gray
D-SUB 37 X1 (37)	D-SUB15 X3 (10) = white

## Connection data

### Connection 1

Connection in acc. with standard	IEC 60807-2
	DIN 41652
Connection method	D-SUB socket strip
Screw thread	UNC 4-40
	M2,5
Number of connections	1
Number of positions	37
Tightening torque	0.2 Nm
Insertion/withdrawal cycles	> 200
Pitch	2.77 mm

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

## Connection 2


Connection in acc. with standard	IEC 60807-2
	DIN 41652
Connection method	D-SUB socket strip
Screw thread	UNC 4-40
	M2,5
Number of connections	2
Number of positions	15
Tightening torque	0.2 Nm
Insertion/withdrawal cycles	> 200
Pitch	2.74 mm

## Notes

General	For proper use, the specifications of the installation directive (see Downloads) must be observed.
---------	--

## Drawings

Diagram

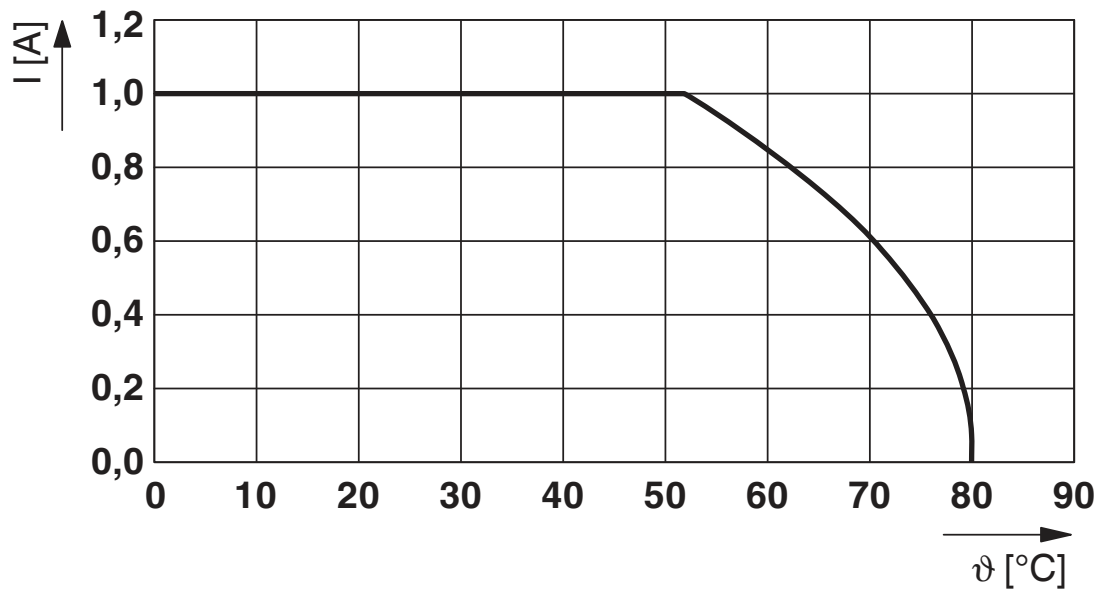

Maximum permissible current per path in uncoiled state

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1276390>



**UL Listed**

Approval ID: FILE E 238705



**cUL Listed**

Approval ID: FILE E 238705

**cULus Listed**

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

## Classifications

### ECLASS

ECLASS-11.0	27242220
ECLASS-12.0	27242220
ECLASS-13.0	27242220

### ETIM

ETIM 8.0	EC000237
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

## Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"



# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

## Accessories

### FLKM-PA-D37/ETHA - Front adapter

1076338

<https://www.phoenixcontact.com/us/products/1076338>



VARIOFACE front adapter for Siemens SIMATIC® ET 200SP HA, with a 37-pos. D-SUB male strip for digital 24 V DC and analog peripheral modules, max. 32 channels can be connected

---

### PLC-V8/D15S/OUT - System connection

2296058

<https://www.phoenixcontact.com/us/products/2296058>



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of output cards, connection 1: D-SUB pin strip 1x 15-position, connection 2: Plug-in connection (Can be snapped onto 8x PLC-INTERFACE terminals), connection 3: Screw connection 1x 2-position, number of channels: 8, control logic: plusschaltend

# CABLE-D37F/2XD15F/HF/8M/ETHA - Cable



1276390

<https://www.phoenixcontact.com/us/products/1276390>

## PLC-V8L/D15S/OUT - System connection

1104789

<https://www.phoenixcontact.com/us/products/1104789>



V8 adapter for 8 x PLC-INTERFACE (14 mm), connection 1: D-SUB pin strip 1x 15-position, connection 2: Plug-in connection (Can be snapped onto 8x PLC-INTERFACE terminals), connection 3: Screw connection 1x 2-position, number of channels: 8, control logic: plusschaltend

---

## PLC-V8/D15S/IN - System connection

2296074

<https://www.phoenixcontact.com/us/products/2296074>



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of input cards, connection 1: D-SUB pin strip 1x 15-position, connection 2: Plug-in connection (Can be snapped onto 8x PLC-INTERFACE terminals), connection 3: Screw connection 1x 2-position, number of channels: 8, control logic: plusschaltend

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)