

MCL0606FYW1GR1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Green




VENKEL LTD.

Part Number	Size	Emitting Color	Emitting Material	Lens-Color	Luminous Intensity mcd	Wavelength nm λ_P	Viewing Angle (2θ 1/2)
MCL0606FYW1GR1T	0606	Yellow, Green	AlGaInP, AlGaInP	Clear	Yellow: 50mcd Min 80mcd Typ Green: 20mcd Min 40mcd Typ	Yellow: 598nm typ Green: 576nm typ	130°


Electrical & Optical Specifactions ($T_A=25^\circ\text{C}$)		Yellow @20mA	Green @20mA	Unit
Forward Voltage Min.	V_F	1.7	1.7	V
Forward Voltage Max.	V_F	2.6	2.6	V
Reverse Current (Max) ($V_R=5V$)	I_R	10	10	μA
Peak Wavelength Typ.	λ_P	598	576	nm
Dominant Wavelength Typ.	λ_D	595	574	nm
Spectral Line Half Width Typ.	$\Delta\lambda$	15	20	nm

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)		Yellow	Green	Unit
Reverse Voltage	V_R	5	5	V
DC Forward Current	I_F	30	30	mA
Peak Forward Current 1/10 Duty Cycle @ 10KHz	I_{FP}	60	60	mA
Power Dissipation	P_D	75	75	mW
Operating Temperature	T_A	-20 ~ +80		°C
Storage Temperature	T_{stg}	-30 ~ +100		

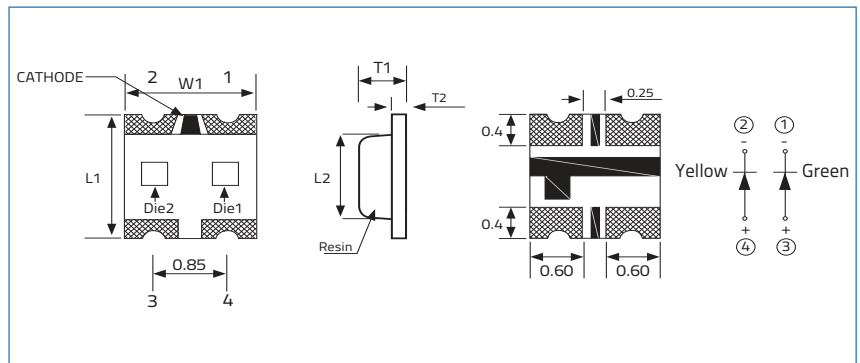

Dimensions		Units: Inches (mm)	
L_1	T_1	T_2	W_1
0.063±0.004 (1.6±0.1)	0.0216±0.004 (0.55±0.1)	0.0071±0.004 (0.18±0.1)	0.059±0.004 (1.5±0.1)

Soldering Pad Layout

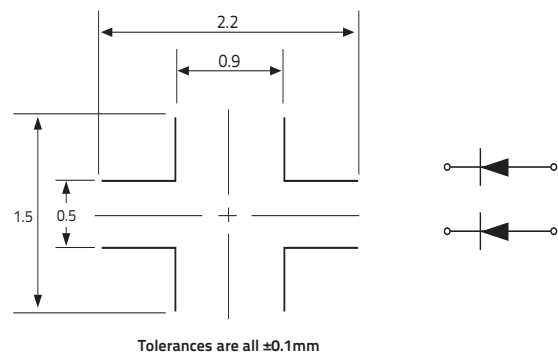

MCL0606FYW1GR1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Green



VENKEL LTD.

Graphs for Yellow (AlGaInP)

Fig.1 Forward Current vs Forward Voltage

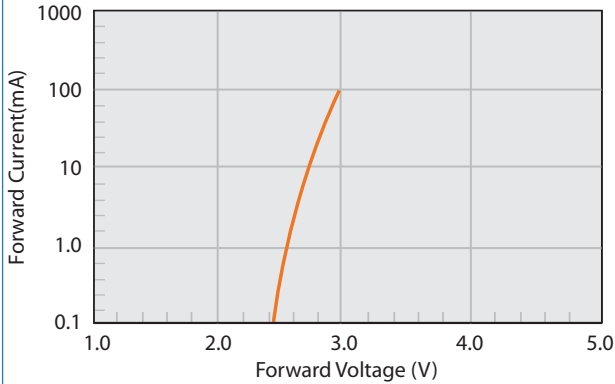


Fig.4 Relative Intensity vs Temperature

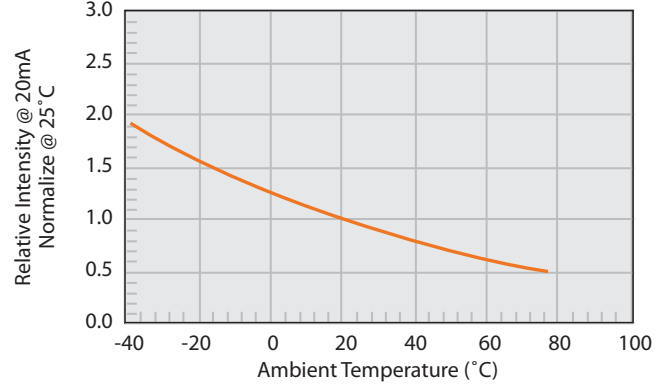


Fig.2 Relative Intensity vs Forward Current

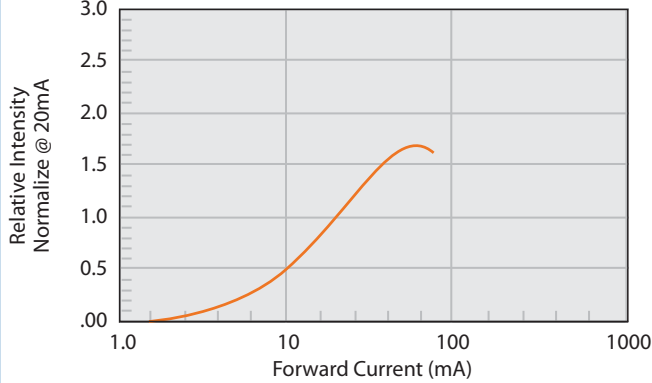


Fig.5 Relative Intensity vs Wavelength



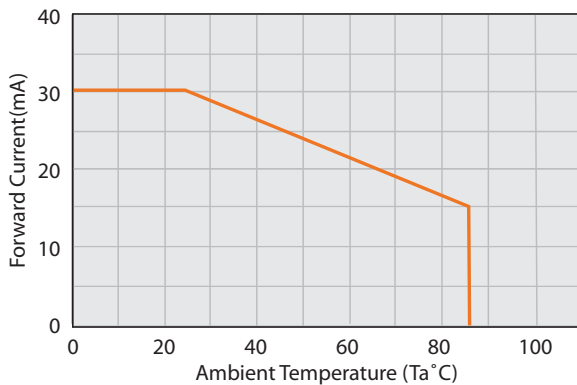


Fig. 6 Direct Radiation

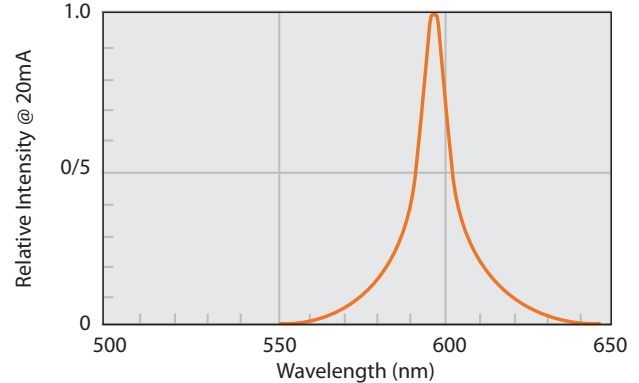

MCL0606FYW1GR1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Green

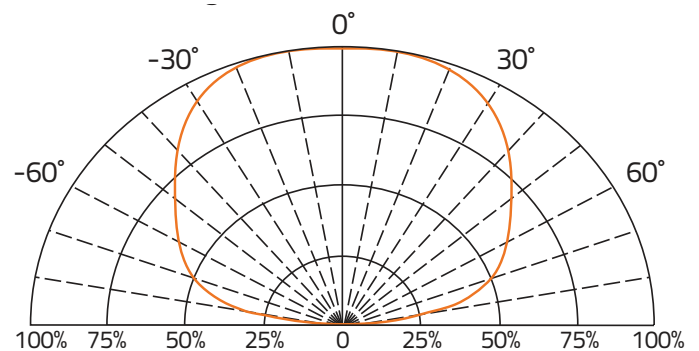

VENKEL LTD.

Graphs for Green (AlGaInP)

Fig.1 Forward Current vs Forward Voltage

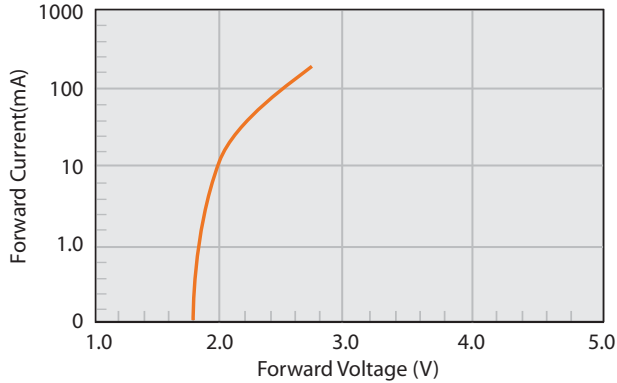


Fig.2 Relative Intensity vs Forward Current

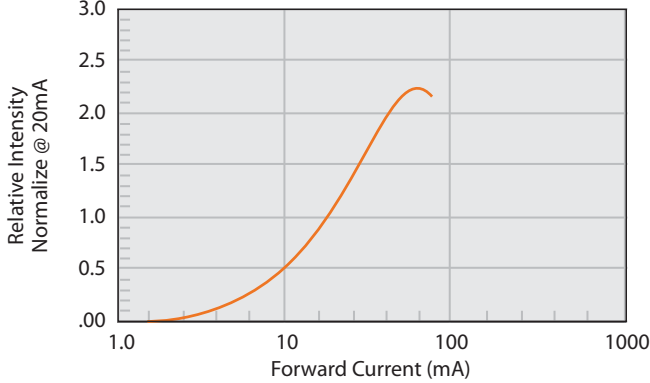


Fig.3 Current vs Temp

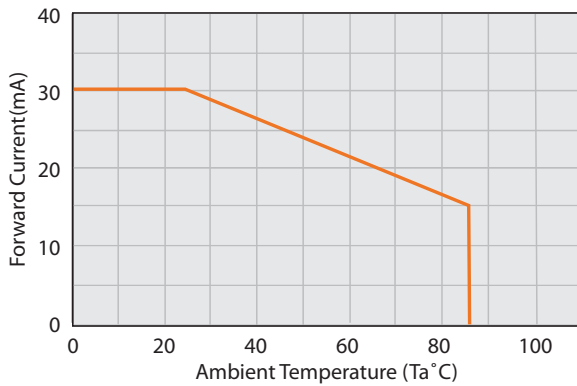


Fig.4 Relative Intensity vs Temperature

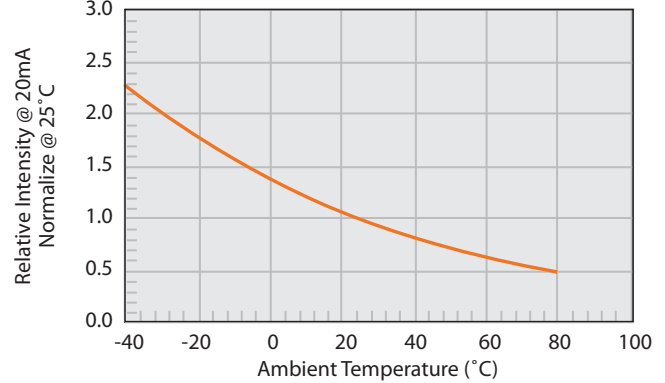


Fig.5 Relative Intensity vs Wavelength


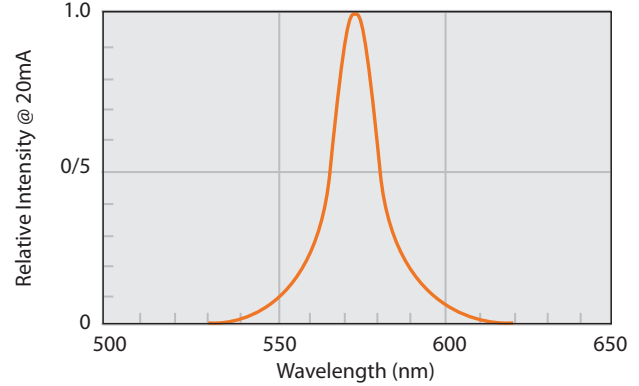


Fig. 6 Direct Radiation

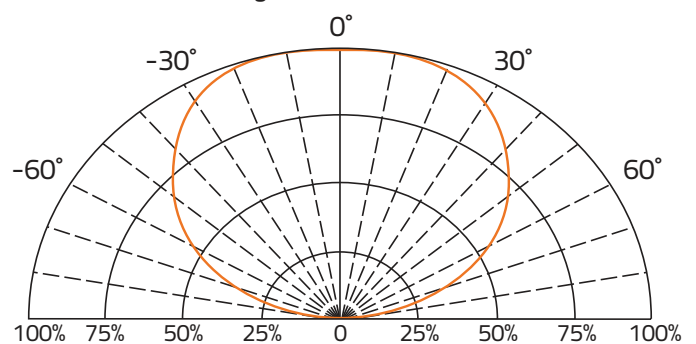

Environmental information

RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level (MSL)	3

Reflow profile

Max Reflow Temperature	260°C
Number of Reflow Cycles	2

MCL0606FYW1GR1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Green



VENKEL LTD.

Label Example

Item: MCL0606FYW1GR1T

Chip Type LED,0606,Flat Lens,Yellow,Green

Qty: 4000

D/C: 1616

Lot: GS115A0168

VF: 1.7-2.6

BIN/HUE: Q/18-P/8

VF: 1.7-2.6

VENKEL LTD

YOUR SINGLE SOURCE FOR SURFACE MOUNT PASSIVES

Codes:

VF: Forward Voltage | BIN: Luminous Intensity | HUE: Dominant Wavelength

Luminous Intensity Classification (BIN Code)

Yellow BIN Code	Iv(mcd) at 20mA		Green BIN Code	Iv(mcd) at 20mA	
	Min.	Max.		Min.	Max.
P	50	80	M	20	32
Q	80	125	N	32	50
R	125	200	P	50	80
S	200	320	Q	80	125

Dominant Wavelength Classification (HUE Code)

λ_D (nm) at 20mA					
Yellow			Green		
Hue Code	Min.	Max.	Hue Code	Min.	Max.
17	589	592	7	568	570
18	592	595	8	570	572
19	595	598	9	572	574
20	598	600	10	574	576

(800) 950-8365

www.venkel.com

MCL0606FYW1GR1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Green



VENKEL LTD.

Reel Specifications		Units: mm		
M	C	F	E	G
178±1.50	56.0±1.0	12.0±1.0	60.0±1.0	9.0±1.0

Packaging Specifications	
Reel Size:	7"
Quantity per Reel :	4,000

Storage Specifications
1. Storage temperature and RH: 5°C~35°C, RH60%
2. Once the package is opened, the LEDs should be used within a week. Otherwise, they should be kept in a moisture proof bag with desiccant. We suggest that you use this product within one year from date code.
3. If opened for more than one week in an atmosphere of 5°C~35°C, RH60%. The parts should be heat treated at 60°C±5°C for 15 hours.

Tape Specifications		Units: mm		
T	W	A	B	F
0.70±0.5	8.0±0.3	1.75±0.5	1.65±0.1	3.5±0.2
E	H	J	D	G
1.75±0.1	4.0±0.2	2.0±0.1	1.5±0.1	4.0±0.2

MCL0606FYW1GR1T DATASHEET

Multi Color LED, 0606, Flat Lens, Yellow, Green




VENKEL LTD.

Environmental Test Criteria			
Classification	Test Item	Test Condition	Sample Size
Endurance Test	Operating Life	1. Ta=25°C 2. If=20mA 3. t=1000hrs (-24hrs, +72hrs)	22
	High Temperature Storage	1. Ta=105°C±5°C 2. t=1000hrs (-24hrs, +72hrs)	22
	Low Temperature Storage	1. Ta=-40°C±5°C 2. t=1000hrs (-24hrs, +72hrs)	22
	High Temperature, High Humidity Storage	1. Ta=85°C 2. RH=85% 3. t=1000hrs(-24hrs, +72hrs)	22
Environmental Test	Thermal Shock	1. Ta=100°C±5°C & -40°C±5°C 20min / 10sec / 20min 3. Total: 100 cycles total	22
	Temperature Cycling	1. 100°C±5°C & -40°C±5°C 30mins / 5mins / 30mins 2. 100 Cycles	22
	IR Reflow	1. T=260°C Max. 10 seconds Max 2. 6 Min	22

Drive Method

LED is a current operated drive, and therefore it requires some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED. Consider worst case voltage variations that can occur across the current limiting resistor placed in series with the LED. The forward current should not be allowed to change by more than 40% of its desired value.

Circuit model A

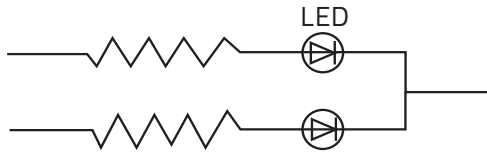

Circuit model B

