



CONNECTION DIAGRAM:

IMPORTANT NOTE:


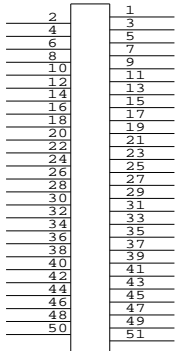


EVEN PIN USE
CRIMP TERMINAL
FI-RC3-1A-1E

ODD PIN USE
CRIMP TERMINAL
FI-RC3-1B-1E

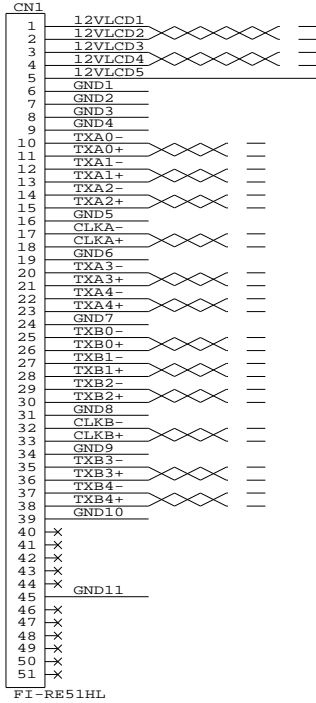


FI-RE51HL

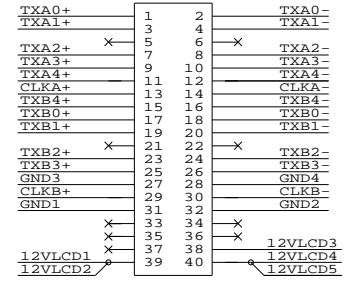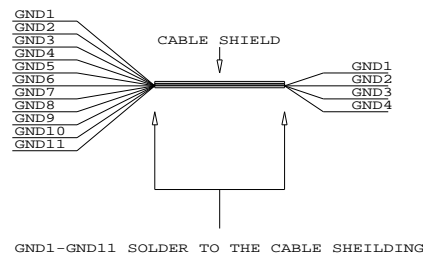

DF13-40DS-1.25C


CONTROLLER SIDE

CONSTRUCTION DIAGRAM:

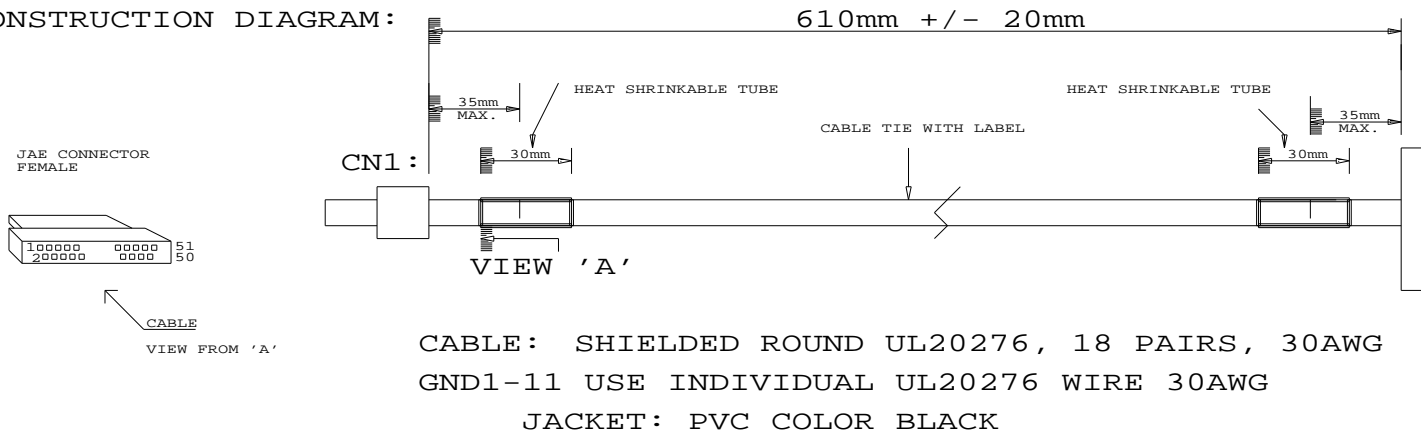

CABLE: SHIELDED ROUND UL20276, 18 PAIRS, 30AWG
GND1-11 USE INDIVIDUAL UL20276 WIRE 30AWG
JACKET: PVC COLOR BLACK

DF-40DS-1.25C
HIROSE

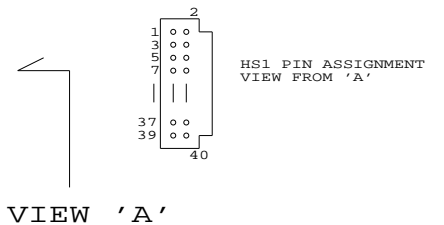

USAGE: LVDS ROUND CABLE FOR AU G645HW01 V0
(FOR SVH-1921)

P/N 426498100-3

LVDS ROUND TWISTED PAIR CABLE: FOR AU G645HW01 V0, 610MM



DIGITAL VIEW LTD. COPYRIGHT 2008, ALL RIGHTS RESERVED CONFIDENTIAL DRAWN BY: VICTOR NG	
Title	ROUND PAIRED CABLE: AU G645HW01 V0
Size	Document Number
B	(...\DV\DV_CABLE\C6498100.SCH)
Date	September 22, 2008
Sheet	1 of 1
REV	00