


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

| REVISION | | | |
|----------|-------------|------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| | | | |
| | | | |
| | | | |

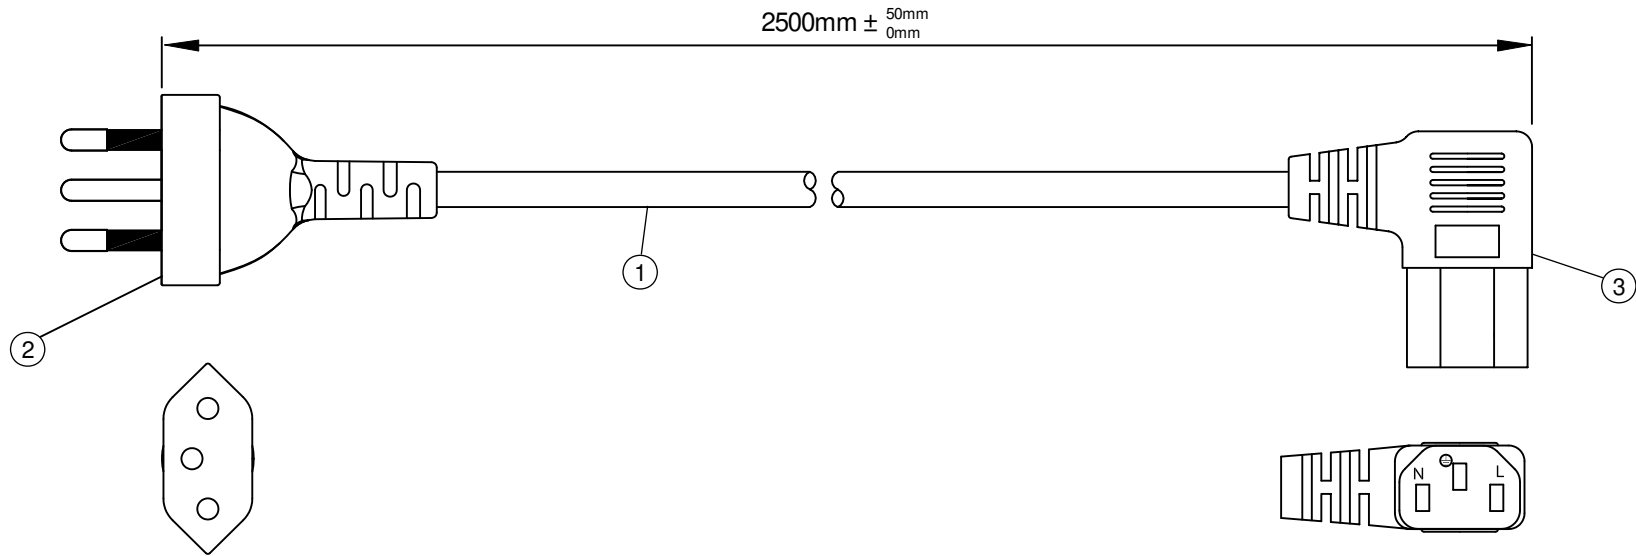

CONTROLLED

NOTES:

1. CORDAGE: H05VV-F, 3x1.00mm², UNSHIELDED, CEE COLOR CODE, TEMP. RATING: 70°C, RATING: 250V 10A, JACKET COLOR: BLACK
2. PLUG: NBR14136
3. CONNECTOR: IEC 60320 C13 RIGHT ANGLED
4. APPROVALS:
 PLUG: INMETRO
 CONNECTOR: VDE
5. ROHS COMPLIANT

| Dim range (mm) | | Tolerance +/- (mm) | | Qualtek Electronics Corp. PPC DIVISION | | |
|----------------|------|-------------------------|--|---|--|--|
| 0-1 | 0.15 | Part Number: 392014-01 | | <div style="border: 1px solid green; padding: 2px; display: inline-block;">RoHS Compliant</div> | | |
| 1-6 | 0.20 | Description: POWER CORD | | | | |
| 6-18 | 0.30 | | | UNIT: mm | | |
| 18-50 | 0.50 | Drawn / Date | | Checked / Date | | |
| 50-120 | 0.70 | R Nuti 10-08-20 | | 10-08-20 | | |
| 120-250 | 0.90 | | | Approved / Date | | |
| 250-500 | 1.20 | | | LY / 10-08-20 | | |