

# Product data sheet

Specifications



Disconnect switch, TeSys VLS, body switch, 16A, 10HP at 480VAC, UL508, three phase, 5kA SCCR, size 1, door mount

VLS3P016D1

## Main

Range	TeSys
Product Name	TeSys VARIO LS
Device Short Name	VLS3P
Product Type	Switch body

## Complementary

Mounting Support	Door
Performance Level	High performance
Number of Poles	3P
Contact Type and Composition	3 NO
Color	Grey
[Ue] UL Rated Operational Voltage	600 V AC 50/60 Hz UL 508
Network type	AC
Network frequency	50/60 Hz
UL Maxium Horsepower Ratings	5 hp 200/208 V AC 5 hp 240 V AC 10 hp 480 V AC 10 hp 600 V AC 1 hp 120 V AC 2 hp 240 V AC
[Ue] IEC Rated Operational Voltage	690 V AC 50/60 Hz
IEC Rated Operational Power in W	7.5 kW 400 V AC-23A) 7.5 kW 500 V AC-23A) 11 kW 690 V AC-23A)
[Ie] Rated Operational Current	16 A Ue: 600 V UL 508 16 A AC-21A Ue: 400 V 16 A AC-21A Ue: 500 V 16 A AC-21A Ue: 690 V 16 A AC-22A Ue: 400 V 16 A AC-22A Ue: 500 V 16 A AC-22A Ue: 690 V 16 A AC-23A Ue: 400 V 16 A AC-23A Ue: 500 V 16 A AC-23A Ue: 690 V
[Ith] Conventional Free Air Thermal Current	16 A 131 °F (55 °C)
[Ithe] Conventional Enclosed Thermal Current	16 A

<b>Making capacity ( I Rms)</b>	24 A 690 V AC-21A 48 A 690 V AC-22A 160 A 690 V AC-23A
<b>Breaking Capacity</b>	24 A 690 V AC-21A) 48 A 690 V AC-22A) 128 A 690 V AC-23A)
<b>SCCR</b>	Fuse RK5 30 A maximum: 5 kA at 600 V AC
<b>Rated Conditional Short Circuit Current</b>	50 kA 400 V 16 A gG
<b>[Icm] Rated Short Circuit Making Capacity</b>	1128 A 690 V
<b>Intermittent duty class</b>	Class 120 - 60 %
<b>[Uimp] rated impulse withstand voltage</b>	8 kV
<b>[Icw] rated short-time withstand Rms current</b>	800 A 690 V 1 s
<b>Mechanical Durability</b>	100000 cycles
<b>Electrical Durability</b>	100000 cycles AC-21A
<b>UL Wire Size</b>	AWG 18...AWG 6 copper
<b>IEC Terminal Connection</b>	Power circuit screw clamp terminals 0.02 in <sup>2</sup> (10 mm <sup>2</sup> ) solid Power circuit screw clamp terminals 0.02 in <sup>2</sup> (16 mm <sup>2</sup> ) flexible - without cable end
<b>Tightening Torque</b>	Power circuit 15.93...17.70 lbf.in (1.8...2 N.m) screw clamp terminals
<b>Height</b>	3.07 in (78 mm)
<b>Width</b>	1.77 in (45 mm)
<b>Depth</b>	2.87 in (73 mm)
<b>Product Weight</b>	0.30 lb(US) (0.135 kg)

## Environment

<b>Standards</b>	UL 508 CSA C22.2 No 14 IEC 60947-3
<b>Product Certifications</b>	cULus GL
<b>Degree of Protection</b>	IP20 IEC 60529
<b>Mechanical Robustness</b>	Vibrations 2...100 Hz Fc 0.7 g) IEC 60068-2-6 Shocks 11 ms Ea 15 gn) IEC 60068-2-27
<b>Ambient Air Temperature for Operation</b>	-13...131 °F (-25...55 °C)
<b>Fire Resistance</b>	1760 °F (960 °C) IEC 60695-2-11

## Packing Units


<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	3.15 in (8.0 cm)
<b>Package 1 Width</b>	3.35 in (8.5 cm)
<b>Package 1 Length</b>	4.72 in (12.0 cm)
<b>Package 1 Weight</b>	6.84 oz (194.0 g)
<b>Unit Type of Package 2</b>	S03
<b>Number of Units in Package 2</b>	27
<b>Package 2 Height</b>	11.81 in (30.0 cm)
<b>Package 2 Width</b>	11.81 in (30.0 cm)

<b>Package 2 Length</b>	15.75 in (40.0 cm)
<b>Package 2 Weight</b>	13.12 lb(US) (5.951 kg)

## Offer Sustainability

<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Compliant <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
<b>RoHS exemption information</b>	Yes

Dimensions

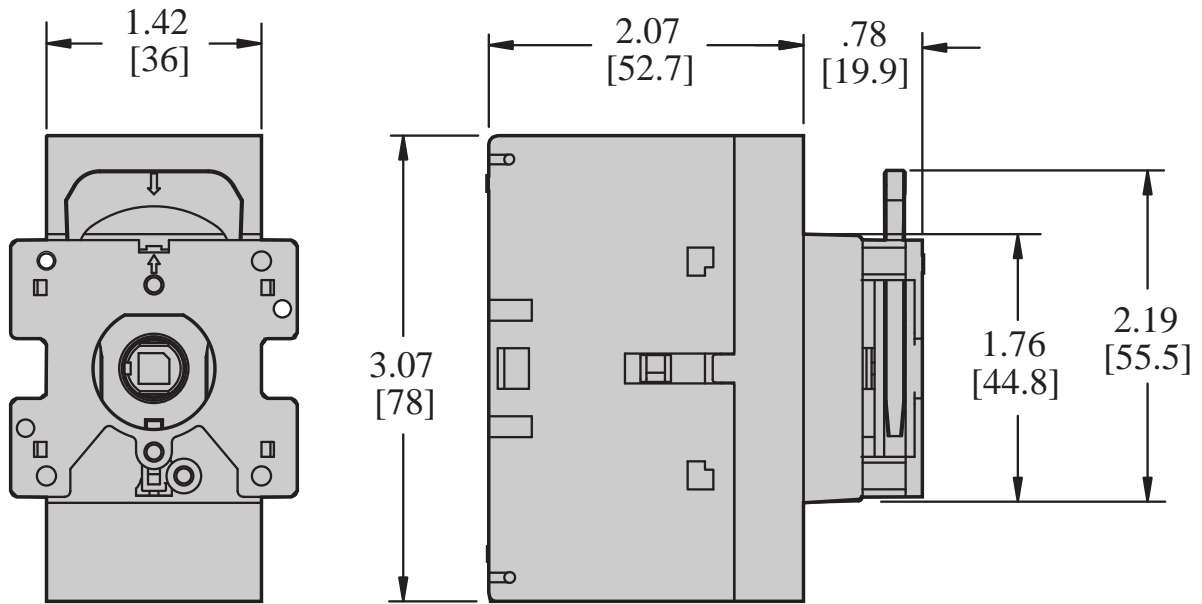

VLS3P016D1  
VLS3P025D1  
VLS3P032D1  
VLS3P040D1

in.  
[mm]

ALL DIMENSIONS ARE APPROXIMATE.  
ALSO SEE TECHNICAL DRAWINGS AND DOCUMENTATION.

Recommended replacement(s)