






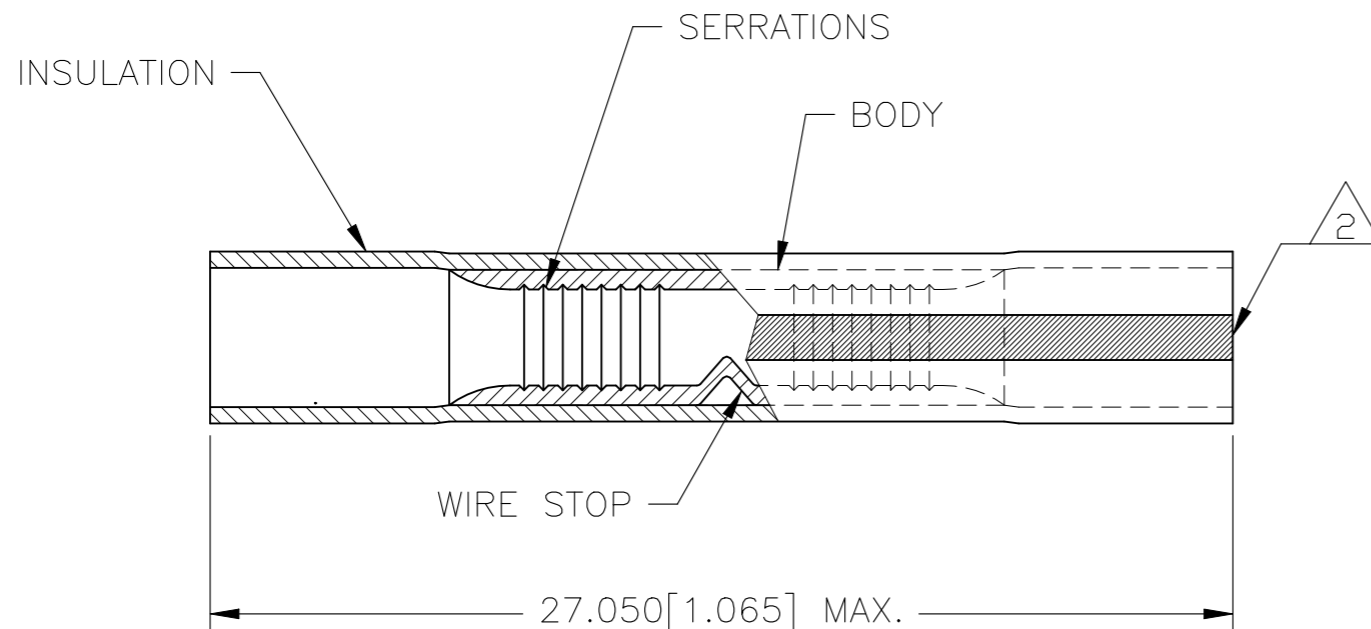


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | C   | REV/ 0720-0612-95         | 31MAY95   | -   | ME   |
|           | C1  | REVISED PER ECO-17-014338 | 29MAR2018 | RS  | DR   |
|           | C2  | REVISED PER ECO-20-017411 | 10DEC2020 | RK  | DR   |

|   |
|---|
|  <b>E13288</b><br>Listed |
| 16-14 AWG<br>SOLID OR STRANDED  |



- 1. WIRE INSUL DIA, 2.921-4.318 [.115-.170]
-  INSULATION STRIPES: 2 - 180 DEGREES APART.
-  MATERIAL: BODY - COPPER PER ASTM B152  
INSULATION - PVC
-  FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN  
EXT THK PER ASTM B545  
INSULATION COLOR - TRANSPARENT BLUE  
INSULATION STRIPE COLOR - BLUE

|      |               |         |
|------|---------------|---------|
| 2500 | ON TAPE, REEL | 55785-2 |
| 1000 | LOOSE PIECE   | 55785-1 |
| QTY  | PACKAGE TYPE  | PART NO |

|  |  |   |   |   |   |   |                           |                              |
|--|--|---|---|---|---|---|---------------------------|------------------------------|
| MAX RECOMMENDED OPERATING TEMPERATURE:<br>105°C [221° F] | THIS DRAWING IS A CONTROLLED DOCUMENT.                 |   | DWN<br>DK SCHRUM<br>4/12/90   |  TE Connectivity |   |   |                           |                              |
|  | DIMENSIONS:<br>mm [INCHES]                             |   | CHK<br>MS FEHER<br>4/16/90  |   |   |   |                           |                              |
|  | VOLTAGE RATING:<br>600V MAX<br>(1000V FIXTURE OR SIGN) |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± 0.127[.005]<br>4 PLC ± -<br>ANGLES ± - | APVD<br>TL SHUTTER<br>4/17/90   | NAME<br>SPLICE, BUTT, PLASTI-GRIP,<br>WIRE SIZE, 16-14 AWG  |   |                           |                              |
|  |  |   |   | CIRVULAR MIL AREA:<br>1.04-2.62mm²[2.050-5.180]<br>SOLID OR STRANDED                                  | MATERIAL<br> | FINISH<br> | PRODUCT SPEC<br>UL 486A-B | APPLICATION SPEC<br>114-2161 |
| CUSTOMER DRAWING   |  |   | WEIGHT<br>-   | SCALE<br>5:1  | SHEET<br>1 OF 1   | REV<br>C2   |                           |                              |