

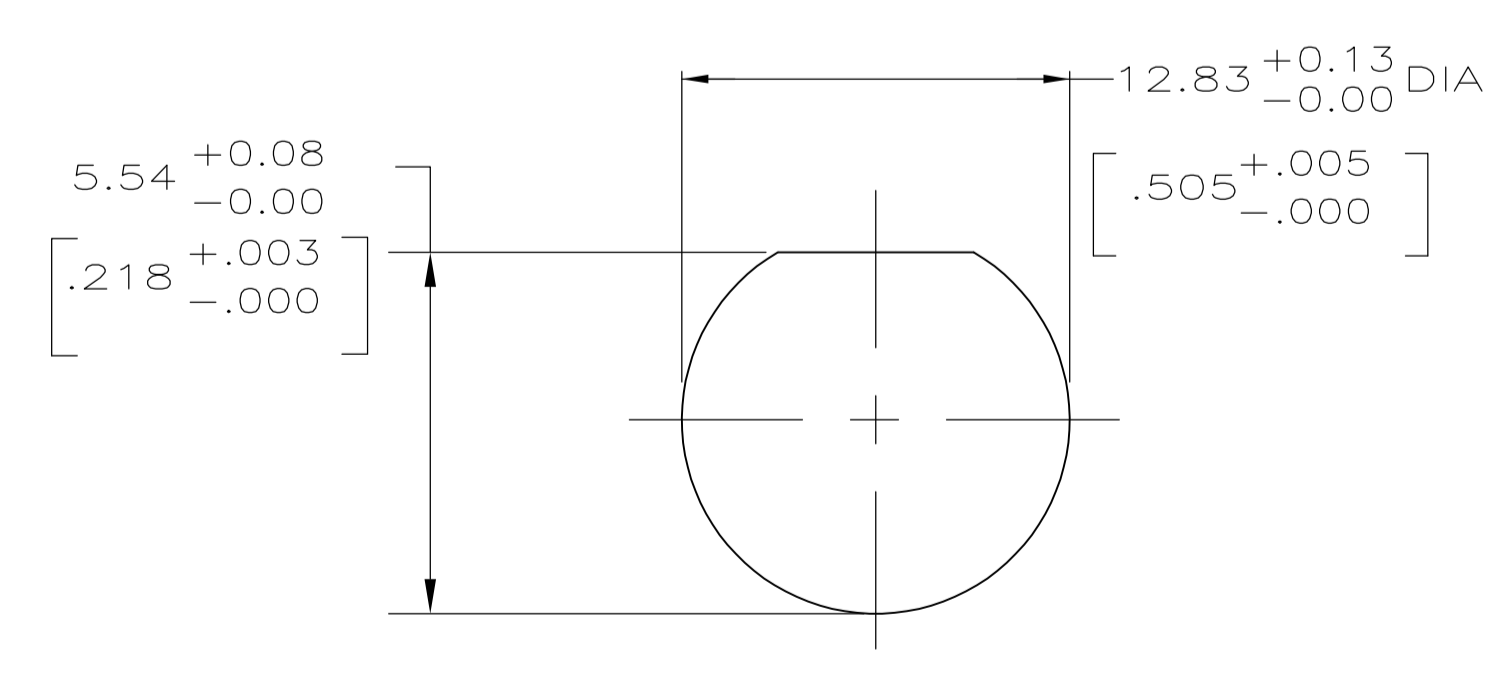
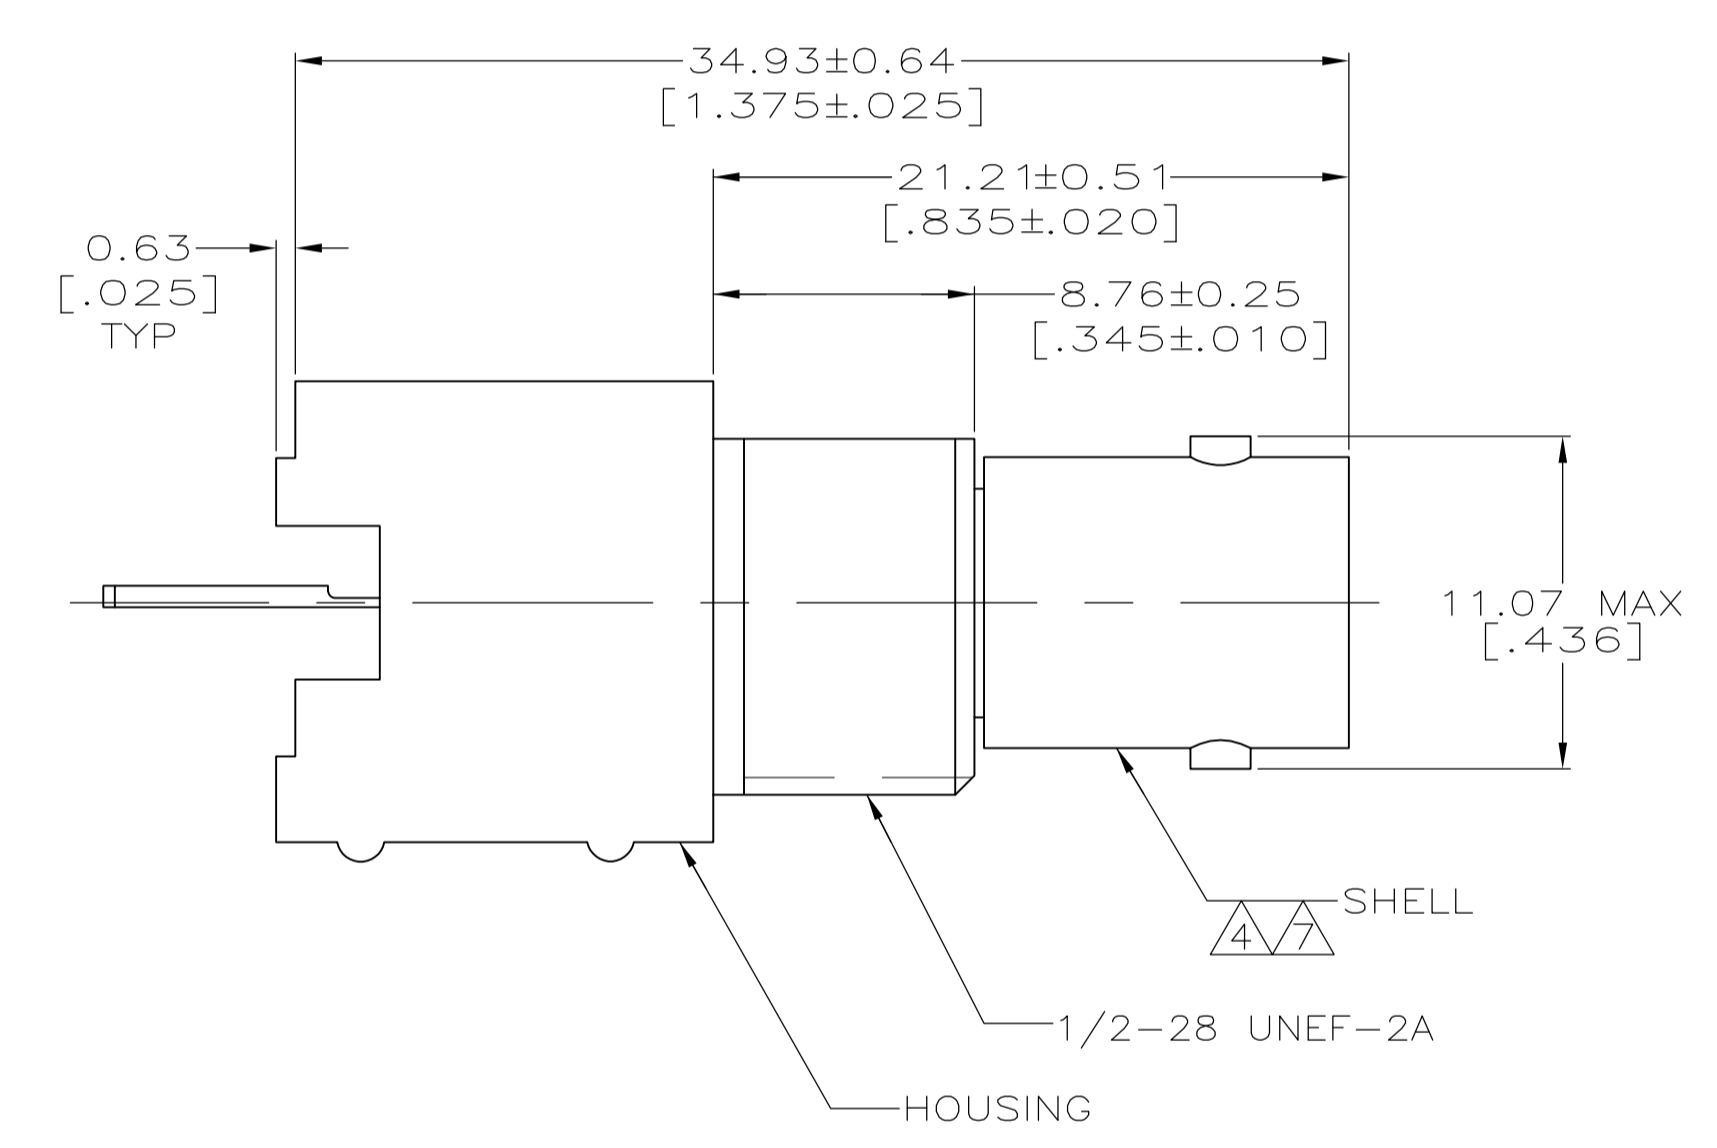
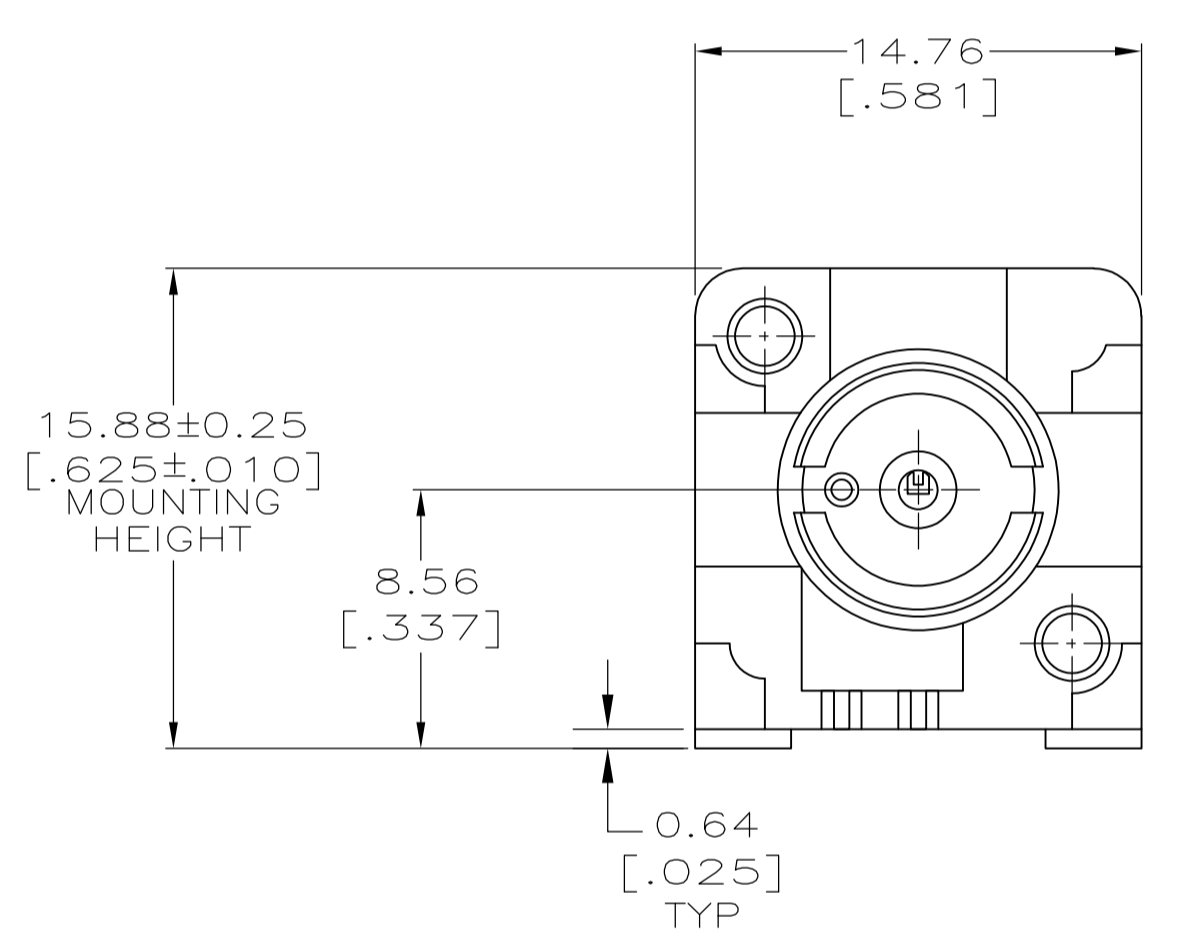


- 1 POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:NATURAL
- 2 POLYESTER PBT PER MIL-M-24519, TYPE GPT-15F, UL94V-0 RATED, COLOR:BLACK
- 3 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 4 ZINC PER QQ-Z-363.
- 5 PHOSPHOR BRONZE PER QQ-B-750.
- 6 BRASS PER ASTM-B-453.
- 7 NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- 8 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 9 GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- 10. SEE INSTRUCTION SHEET 408-2769.

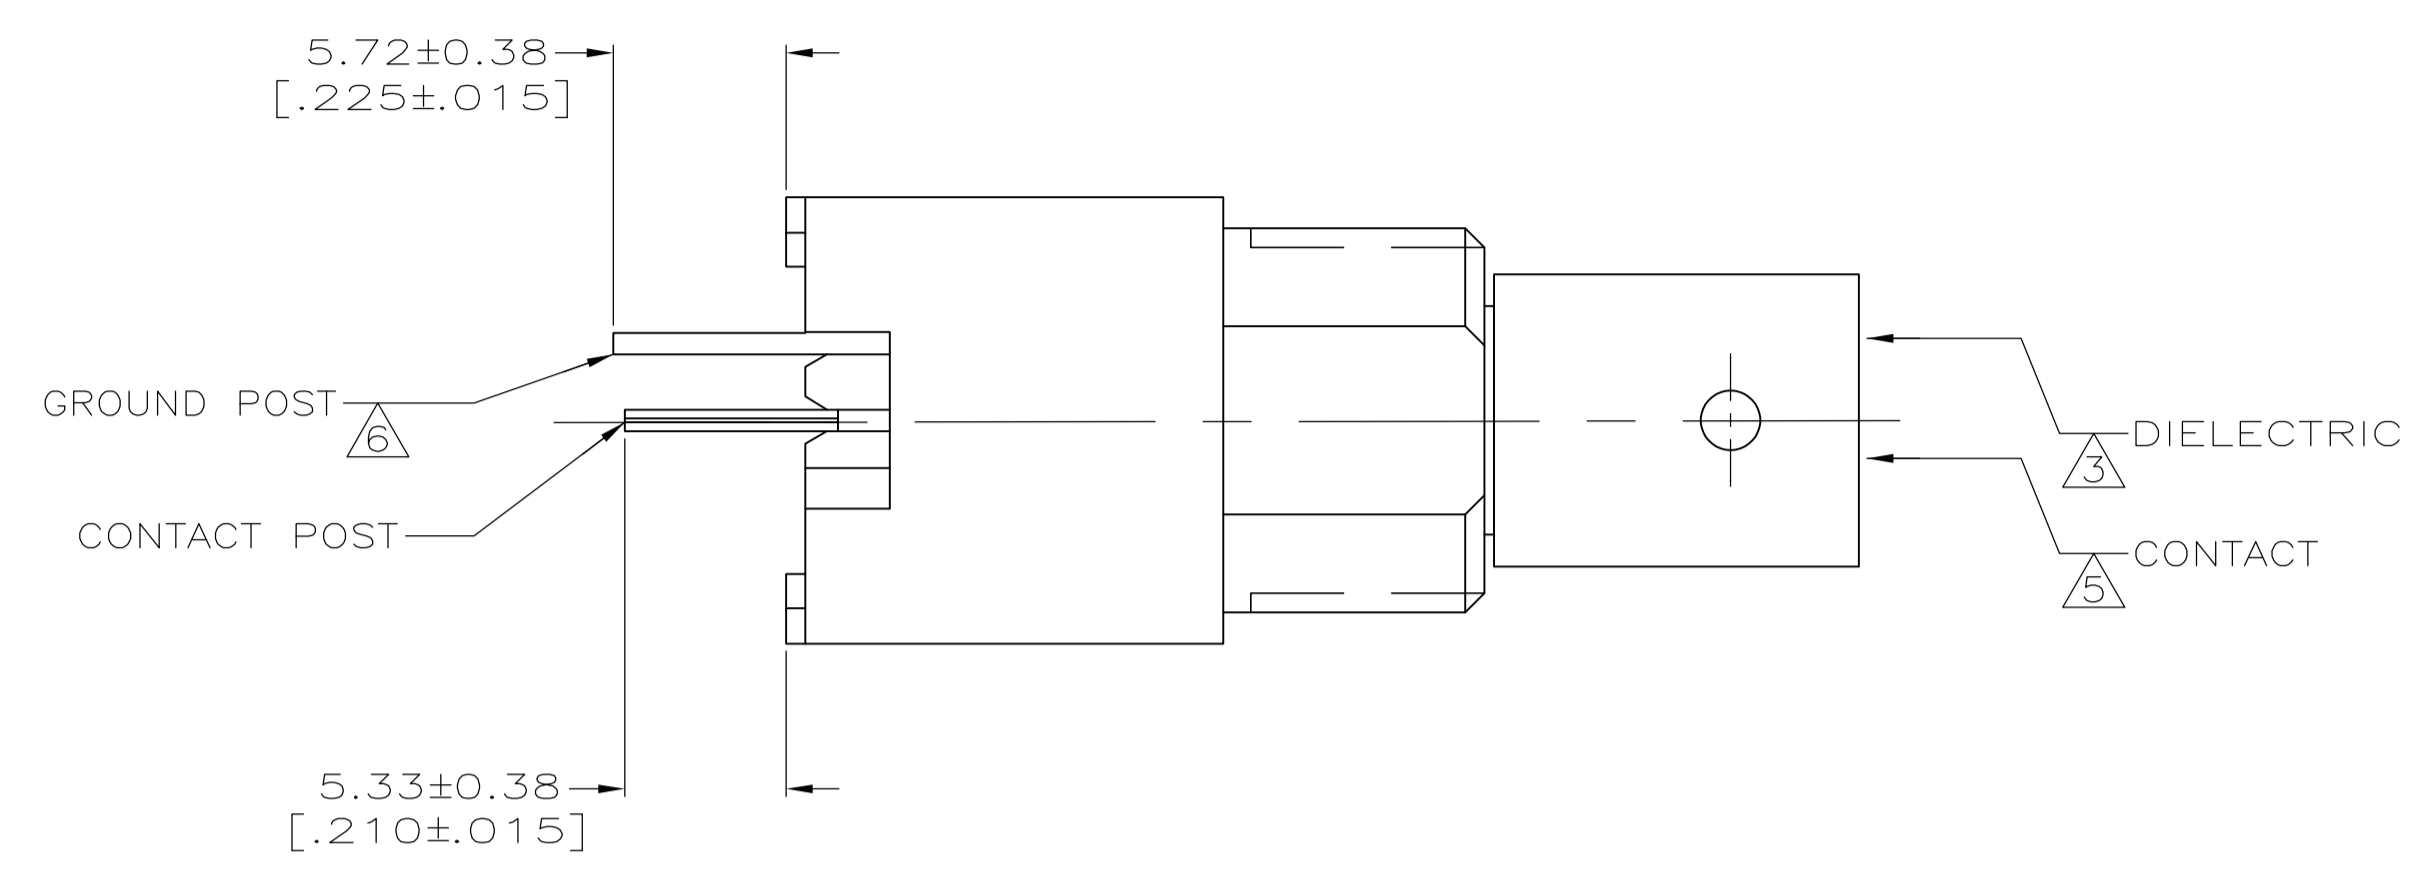

RECOMMENDED PANEL CUTOUT

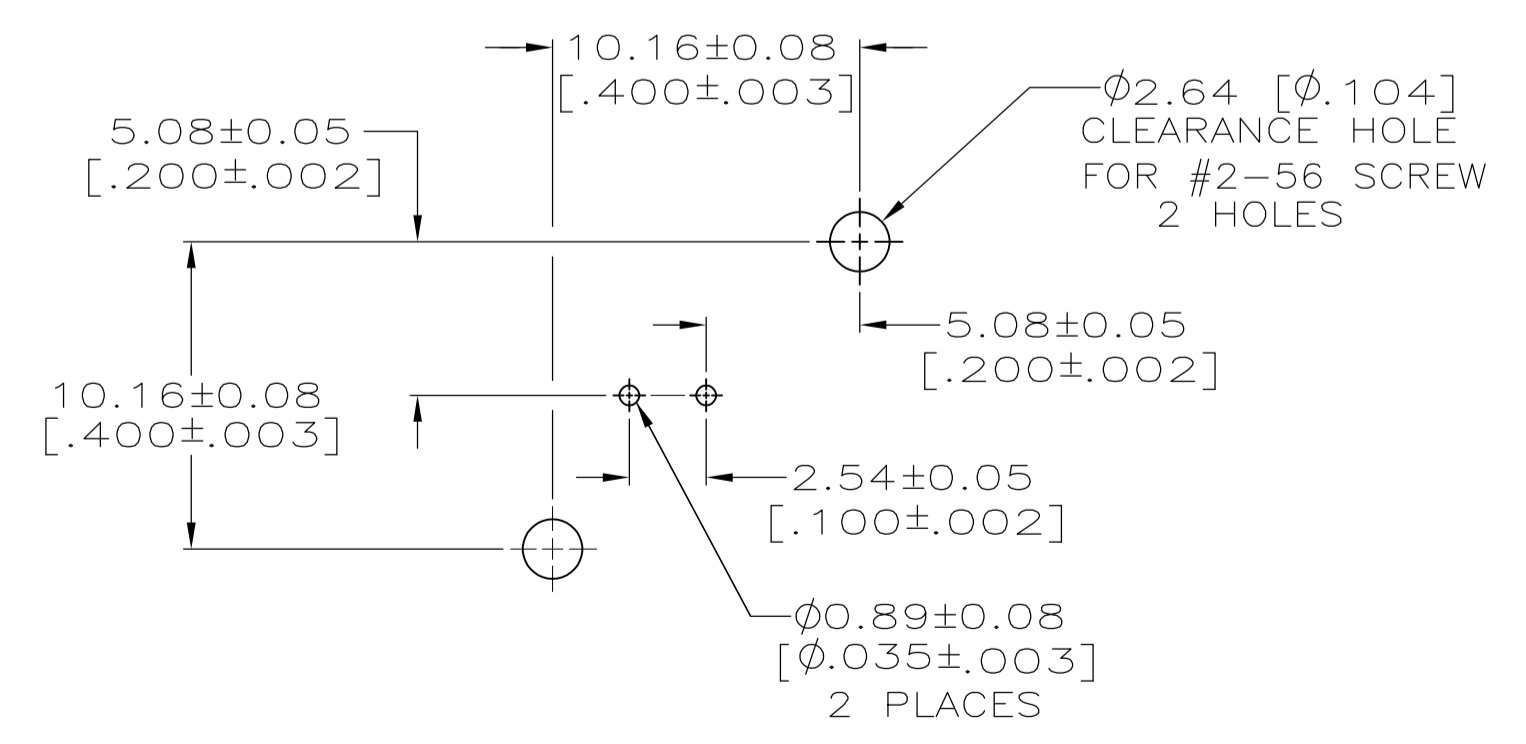

PCB CONFIGURATION

5226993-6	5226993-3	5226993-2	5226993-1
GROUND POST PLATING	CONTACT POST PLATING	CONTACT PLATING	HOUSING MATERIAL
PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. ALCORTA - 25APR2005	DOCK 5 J. HAVENER 25APR2005	STE TE Connectivity
0 PLC ± -	1 PLC ± -	2 PLC ± 0.20 [.008]	3 PLC ± -	4 PLC ± -
MATERIAL		FINISH		WEIGHT
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV B1

NAME: JACK, VERTICAL, 50 OHM, PCB, SERIES BNC  
 PRODUCT SPEC: 108-12078  
 APPLICATION SPEC: A100779C=5226993