

G2-LXP2-M-P

~20° medium beam with light, black holder.
Assembly with location pins and installation
tape.

SPECIFICATION:

Dimensions	Ø 21.8 mm
Height	14.7 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ

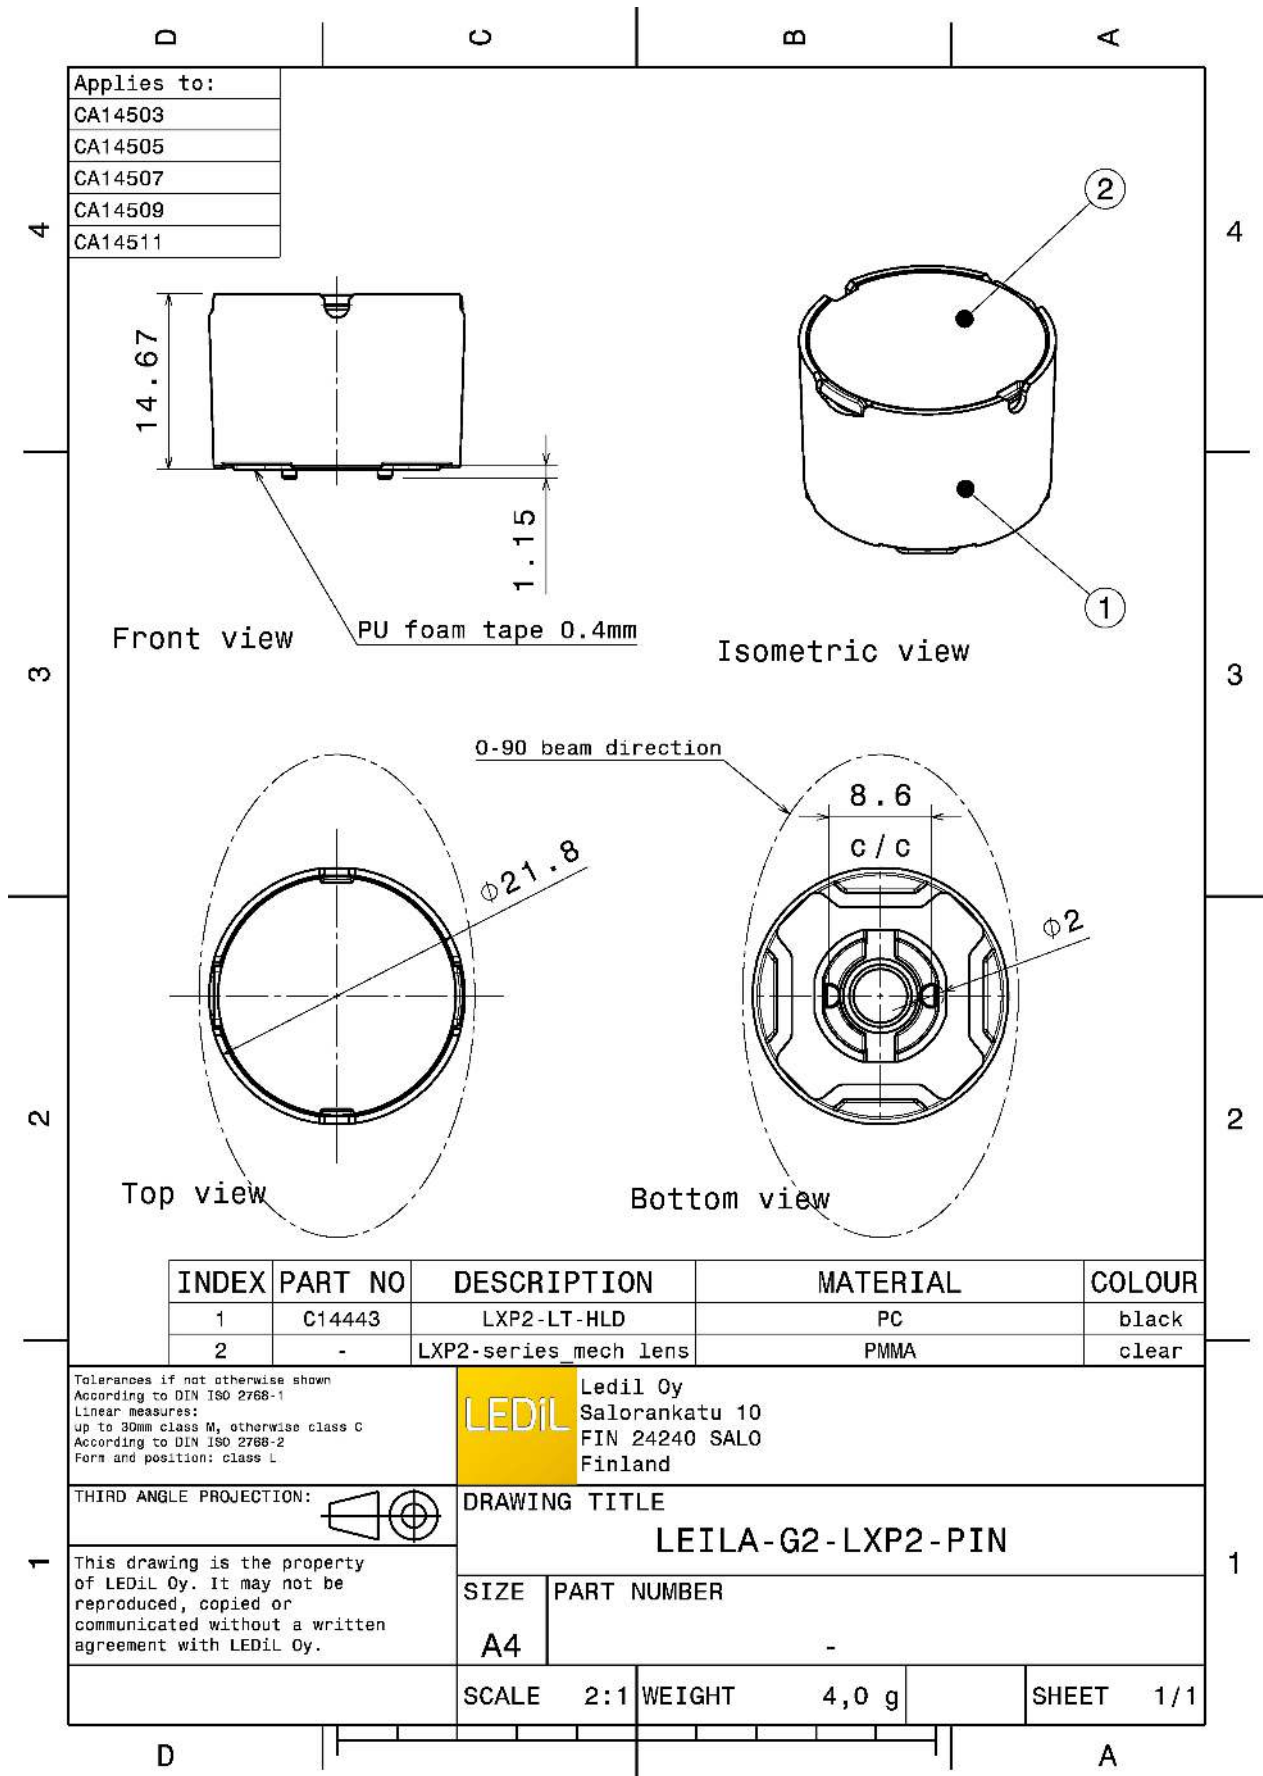


MATERIALS:

Component	Type	Material	Colour	Finish
LXP2-M	Single lens	PMMA	clear	
LXP2-LT-HLD	Holder	PC	black	
HEIDI-TAPE	Tape	Acrylic foam	black	

ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CA14509_G2-LXP2-M-P	Single lens	1680	336	112	8.1
» Box size:					



INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C14443	LXP2-LT-HLD	PC	black
2	-	LXP2-series mech lens	PMMA	clear

Tolerances if not otherwise shown
 According to DIN ISO 2768-1
 Linear measures:
 up to 30mm class M, otherwise class C
 According to DIN ISO 2768-2
 Form and position: class L

LEDiL Ledil Oy
 Salorankatu 10
 FIN 24240 SALO
 Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE
LEILA-G2-LXP2-PIN


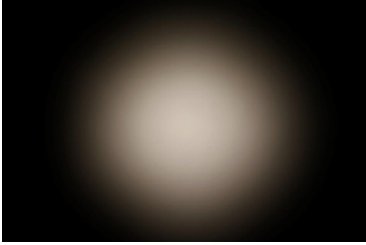
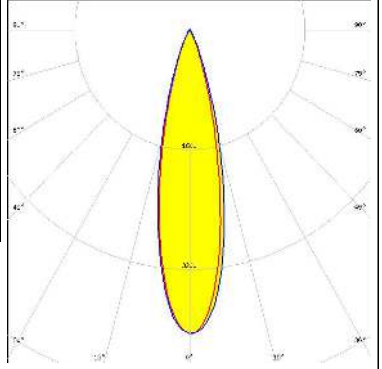

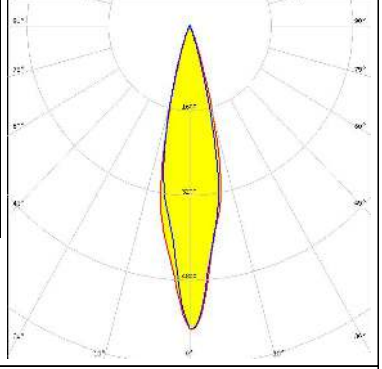

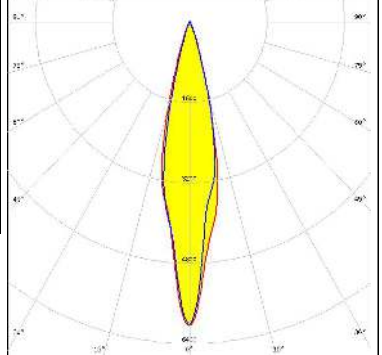
This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SIZE	PART NUMBER
A4	-


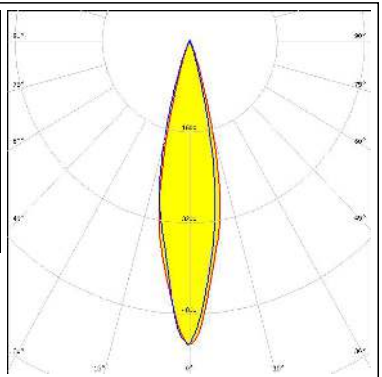
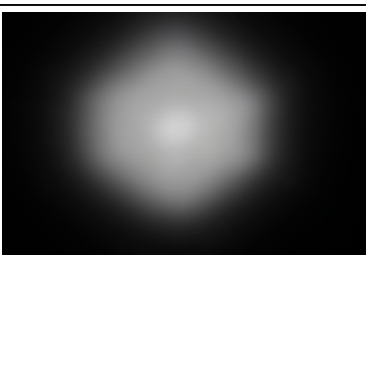
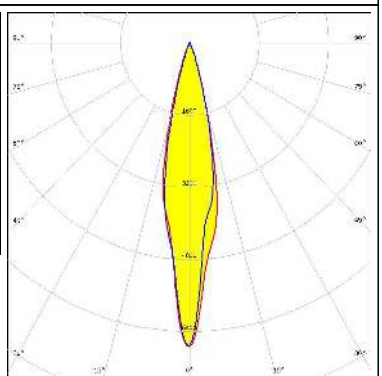

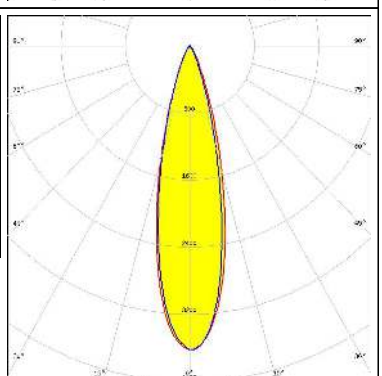

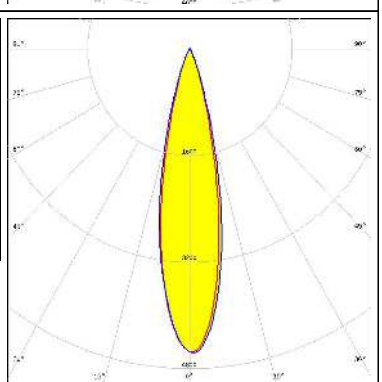
SCALE	2:1	WEIGHT	4,0 g	SHEET	1/1
-------	-----	--------	-------	-------	-----

See also our general installation guide: www.ledil.com/installation_guide


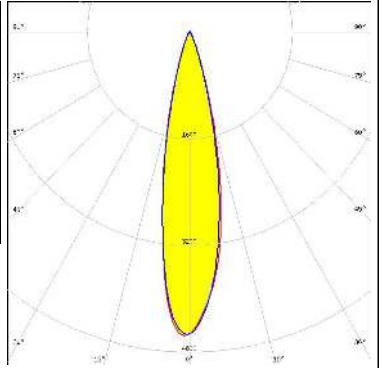

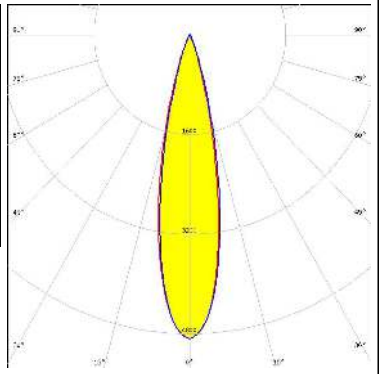

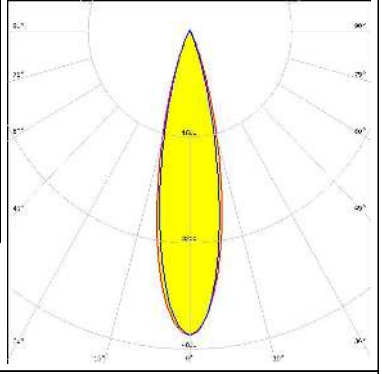
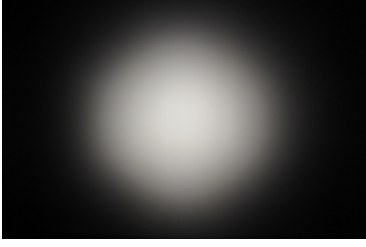
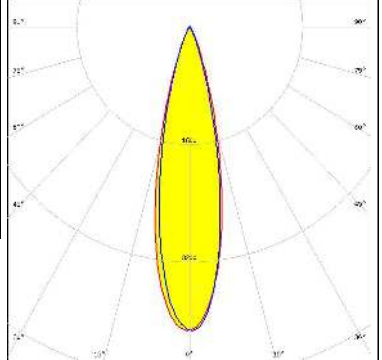
OPTICAL RESULTS (MEASURED):

<p>CREE ⇄ LED</p> <p>LED: XP-E FWHM / FWTM: 22.0° / 40.0° Efficiency: 88 % Peak intensity: 5.2 cd/m LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED: XP-L HD FWHM / FWTM: 24.0° / 44.0° Efficiency: 86 % Peak intensity: 4.1 cd/m LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED: XQ-E HD FWHM / FWTM: 22.0° / 37.0° Efficiency: 86 % Peak intensity: 5.8 cd/m LEDs/each optic: 1 Light colour: White Required components:</p>		
<p>CREE ⇄ LED</p> <p>LED: XQ-E HI FWHM / FWTM: 21.0° / 37.0° Efficiency: 85 % Peak intensity: 6.1 cd/m LEDs/each optic: 1 Light colour: White Required components:</p>		


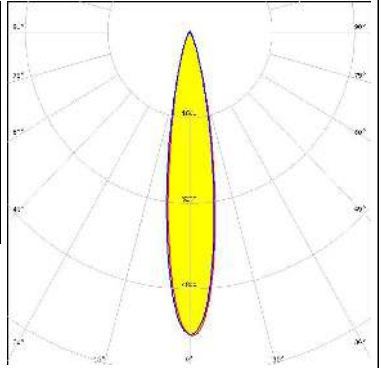
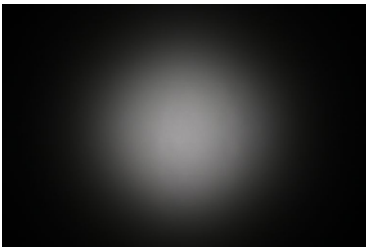
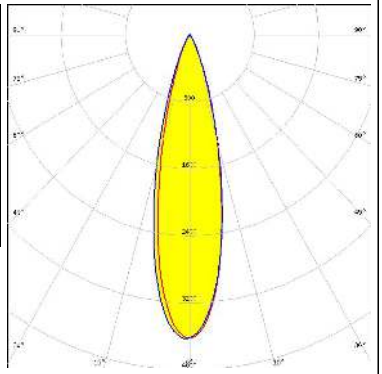

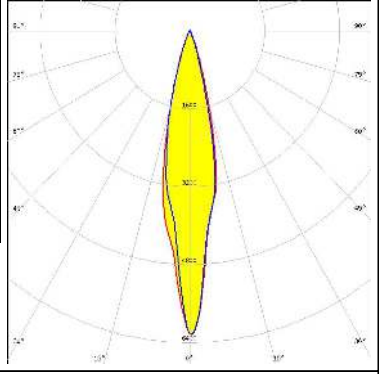

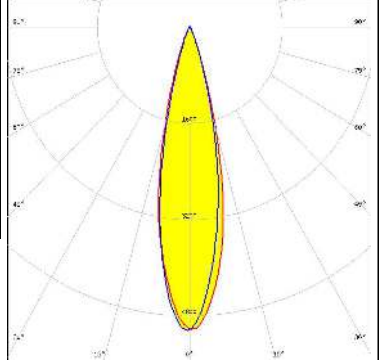
OPTICAL RESULTS (MEASURED):

<p>LUMILEDS</p> <p>LED LUXEON C</p> <p>FWHM / FWTM 23.0° / 38.0°</p> <p>Efficiency 82 %</p> <p>Peak intensity 5.3 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON CZ</p> <p>FWHM / FWTM 20.0° / 37.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 6.7 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON V</p> <p>FWHM / FWTM 26.0° / 48.0°</p> <p>Efficiency 86 %</p> <p>Peak intensity 3.6 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		
<p>LUMILEDS</p> <p>LED LUXEON V2</p> <p>FWHM / FWTM 23.0° / 41.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 4.6 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>		

OPTICAL RESULTS (MEASURED):

<p>NICHIA</p> <p>LED NCSxx19A FWHM / FWTM 22.0° / 40.0° Efficiency 86 % Peak intensity 4.6 cd/m LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NVSW219F FWHM / FWTM 23.0° / 40.0° Efficiency 90 % Peak intensity 4.9 cd/m LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NVSW319B FWHM / FWTM 24.0° / 43.0° Efficiency 90 % Peak intensity 4.6 cd/m LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NVSW3x9A FWHM / FWTM 24.0° / 44.0° Efficiency 86 % Peak intensity 4.3 cd/m LEDs/each optic 1 Light colour White Required components:</p>		

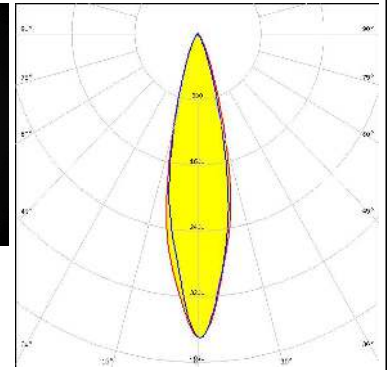
OPTICAL RESULTS (MEASURED):

<p>NICHIA</p> <p>LED NVSW519A FWHM / FWTM 18.0° / 37.0° Efficiency 86 % Peak intensity 5.7 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NWSx229A FWHM / FWTM 25.0° / 47.0° Efficiency 86 % Peak intensity 3.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED OSLOM Black Flat FWHM / FWTM 20.0° / 38.0° Efficiency 87 % Peak intensity 6.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED OSLOM Square CSSRM2/CSSRM3 FWHM / FWTM 24.0° / 41.0° Efficiency 90 % Peak intensity 5.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

OPTICAL RESULTS (MEASURED):

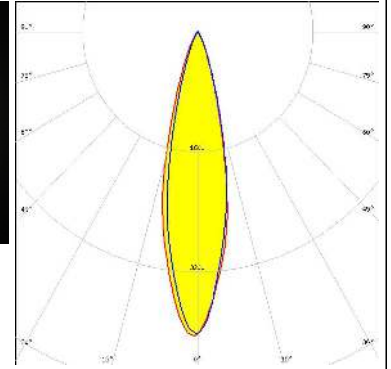
SAMSUNG

LED LH181A
 FWHM / FWTM 24.0° / 45.0°
 Efficiency 80 %
 Peak intensity 3.7 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

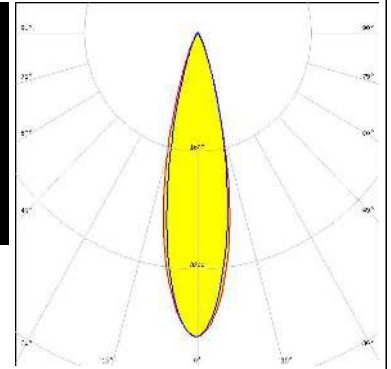


SAMSUNG

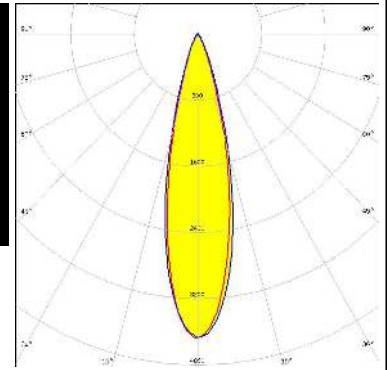
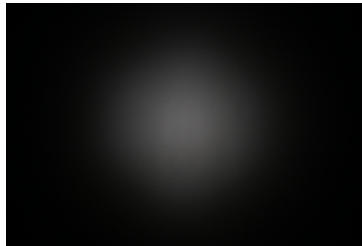
LED LH181B
 FWHM / FWTM 25.0° / 46.0°
 Efficiency 85 %
 Peak intensity 4.1 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:




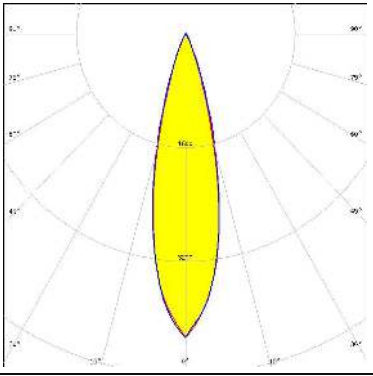

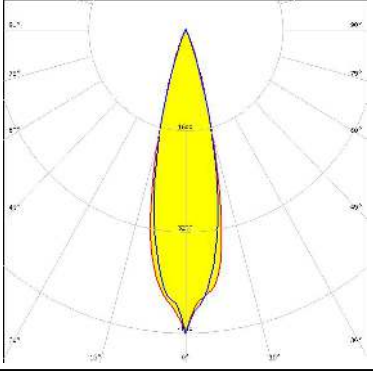

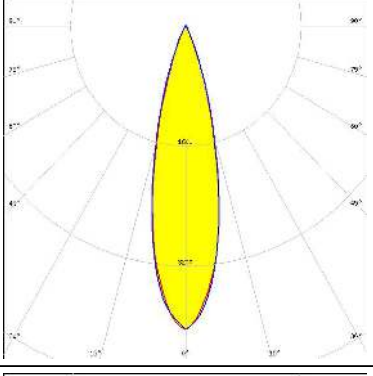

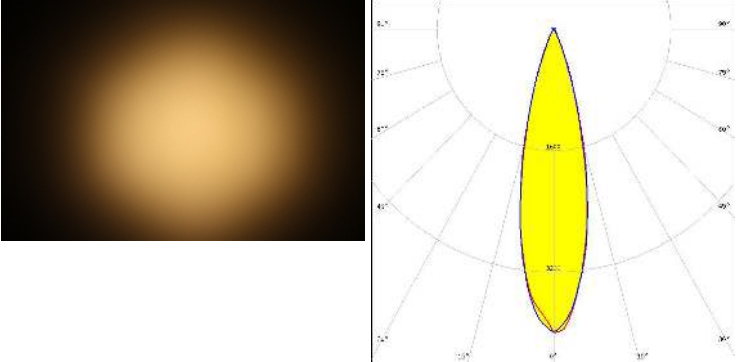
LED Z5M3
 FWHM / FWTM 24.0° / 44.0°
 Efficiency 86 %
 Peak intensity 4.1 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:



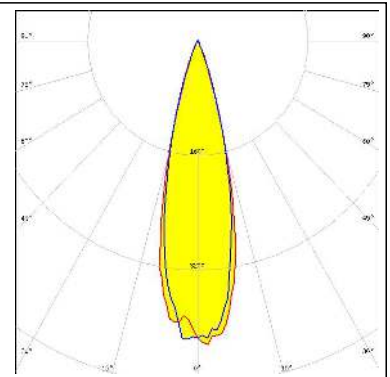
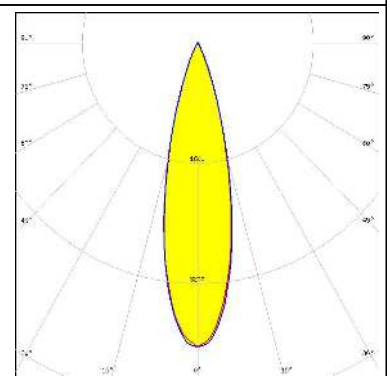
LED Z8Y22P
 FWHM / FWTM 26.0° / 46.0°
 Efficiency 81 %
 Peak intensity 3.7 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:



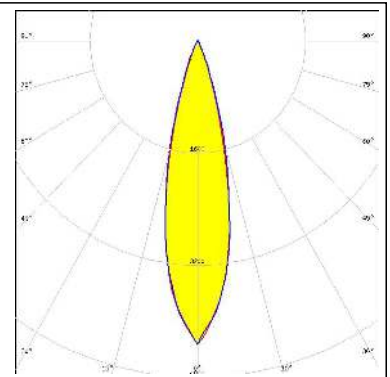

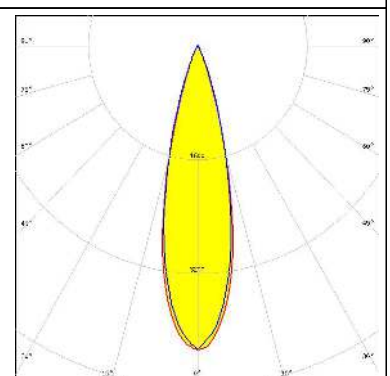
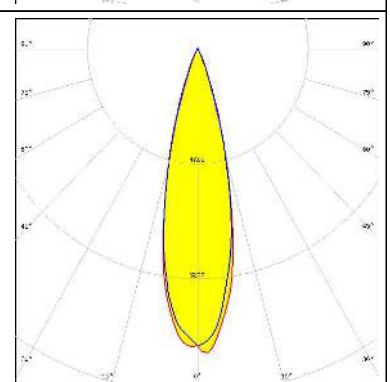
OPTICAL RESULTS (SIMULATED):

	<p>LED J Series 2835 FWHM / FWTM 26.0° / 45.0° Efficiency 92 % Peak intensity 4.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
	<p>LED XP-G2 FWHM / FWTM 25.0° / 41.0° Efficiency 93 % Peak intensity 4.8 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
	<p>LED XP-G2 HE FWHM / FWTM 26.0° / 45.0° Efficiency 90 % Peak intensity 4 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
	<p>LED XP-G3 FWHM / FWTM 26.0° / 45.0° Efficiency 89 % Peak intensity 4 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

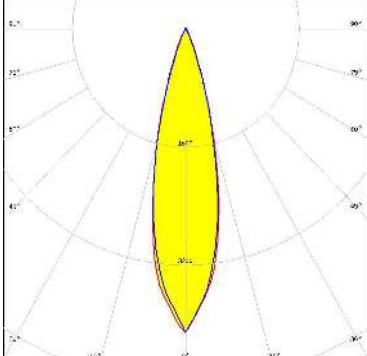
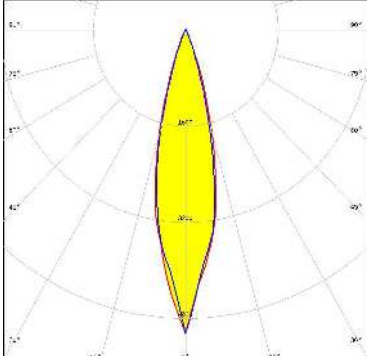
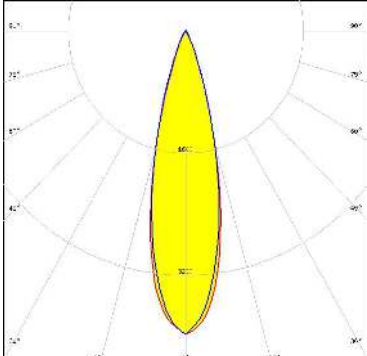
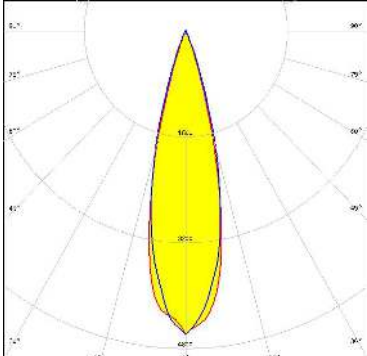
OPTICAL RESULTS (SIMULATED):

<p>CREE LED</p> <p>LED: XT-E FWHM / FWTM: 26.0° / 42.0° Efficiency: 89 % Peak intensity: 4.3 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON HL2X FWHM / FWTM: 26.0° / 46.0° Efficiency: 91 % Peak intensity: 4.1 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON IR Compact FWHM / FWTM: 26.0° / 40.0° Efficiency: 84 % LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON IR Domed 60 FWHM / FWTM: 24.0° / 42.0° Efficiency: 88 % LEDs/each optic: 1 Light colour: White Required components:</p>	

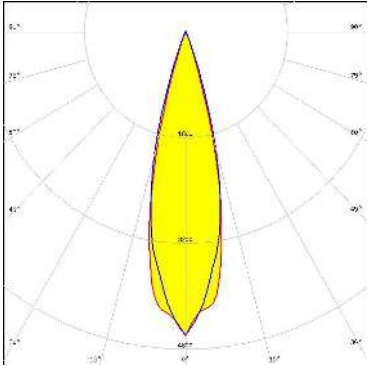
OPTICAL RESULTS (SIMULATED):

<p>LUMILEDS</p> <p>LED: LUXEON IR Domed 60 FWHM / FWTM: 24.0° / 43.0° Efficiency: 88 % LEDs/each optic: 1 Light colour: IR Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON IR Domed 90 FWHM / FWTM: 26.0° / 44.0° Efficiency: 90 % LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON T FWHM / FWTM: 26.0° / 43.0° Efficiency: 92 % Peak intensity: 4.3 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>LUMILEDS</p> <p>LED: LUXEON TX FWHM / FWTM: 26.0° / 43.0° Efficiency: 91 % Peak intensity: 4.2 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	


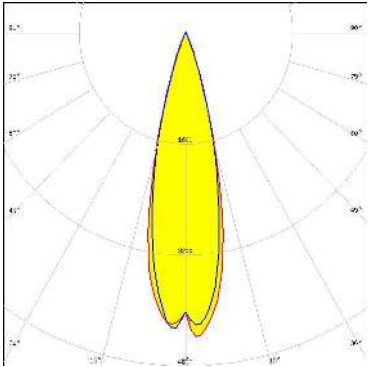
OPTICAL RESULTS (SIMULATED):

<p>NICHIA</p> <p>LED NVSxx19B/NVSxx19C FWHM / FWTM 25.0° / 44.0° Efficiency 88 % Peak intensity 4.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3030 FWHM / FWTM 23.0° / 42.0° Efficiency 91 % Peak intensity 5.1 cd/lm LEDs/each optic 1 Light colour Blue Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSCONIQ P 3737 Flat FWHM / FWTM 26.0° / 46.0° Efficiency 92 % Peak intensity 4 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>OSRAM Opto Semiconductors</p> <p>LED OSOLON SSL 150 FWHM / FWTM 26.0° / 42.0° Efficiency 93 % Peak intensity 4.6 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

OPTICAL RESULTS (SIMULATED):

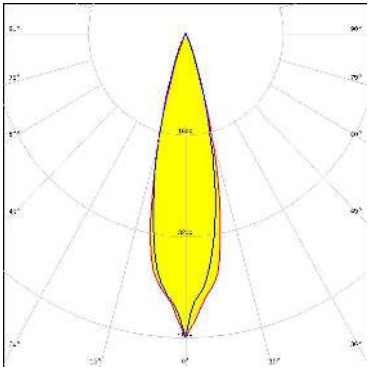
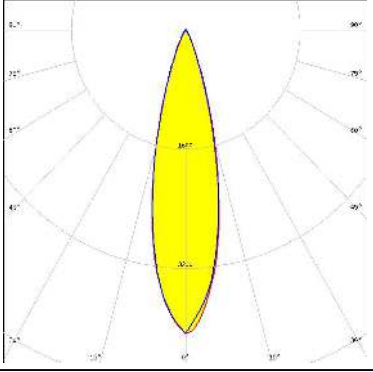
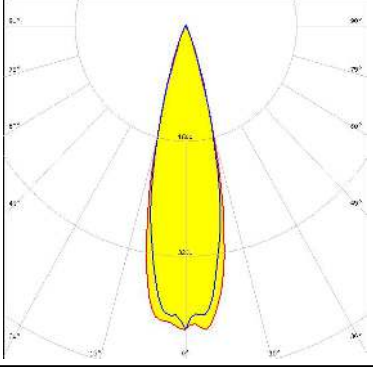
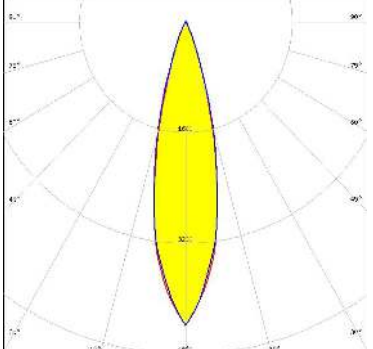
 <small>Osram Semiconductors</small>		
LED	OSLOM SSL 80	
FWHM / FWTM	27.0° / 40.0°	
Efficiency	91 %	
Peak intensity	4.6 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		

 <small>Osram Semiconductors</small>		
LED	SFH 4770S	
FWHM / FWTM	25.0° / 48.0°	
Efficiency	84 %	
LEDs/each optic	1	
Light colour	White	
Required components:		




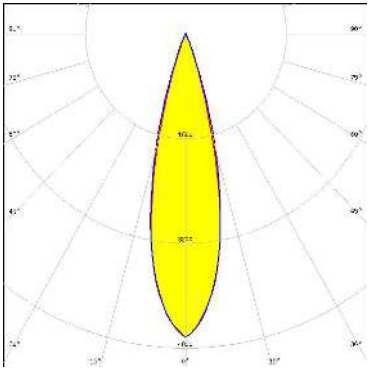

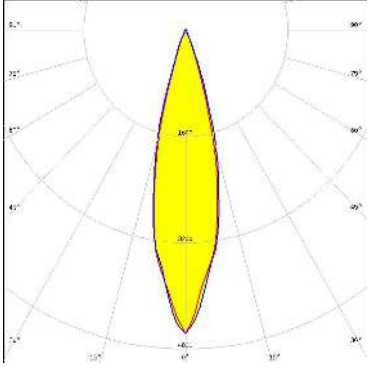

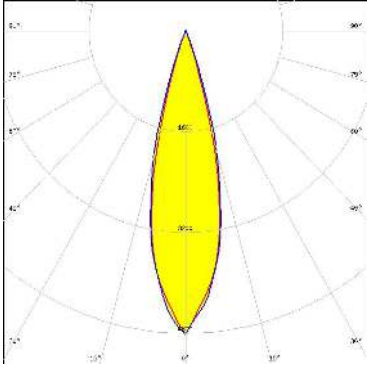

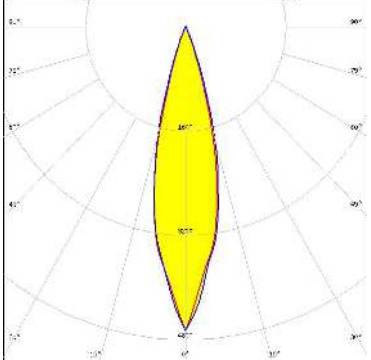
		
LED	LH351A	
FWHM / FWTM	25.0° / 41.0°	
Efficiency	91 %	
Peak intensity	4.4 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		

		
LED	LH351B	
FWHM / FWTM	25.0° / 41.0°	
Efficiency	91 %	
Peak intensity	4.5 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		

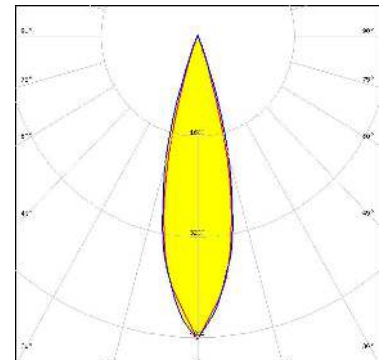
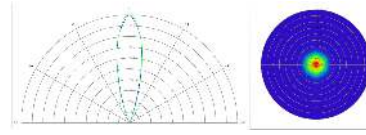
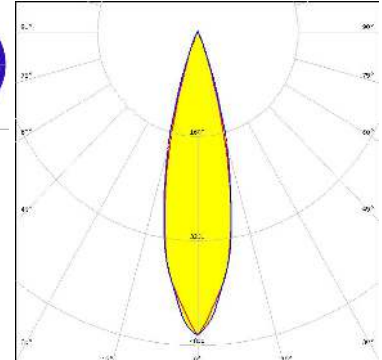
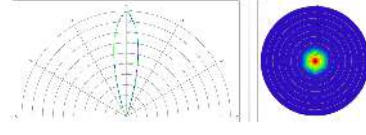
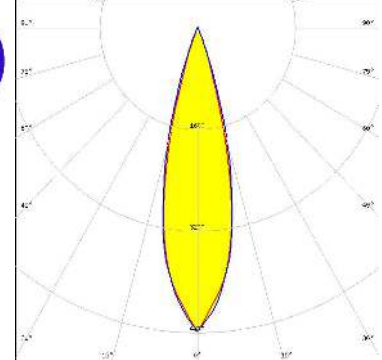
OPTICAL RESULTS (SIMULATED):

<p>SEOUL SEMICONDUCTOR</p> <p>LED: Z5M1/Z5M2 FWHM / FWTM: 24.0° / 40.0° Efficiency: 92 % Peak intensity: 4.8 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>SEOUL SEMICONDUCTOR</p> <p>LED: Z5M4 FWHM / FWTM: 26.0° / 46.0° Efficiency: 93 % Peak intensity: 4.1 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>SEOUL SEMICONDUCTOR</p> <p>LED: Z5P FWHM / FWTM: 26.0° / 41.0° Efficiency: 91 % Peak intensity: 4.3 cd/lm LEDs/each optic: 1 Light colour: White Required components:</p>	
<p>STANLEY</p> <p>LED: FWR1107MS FWHM / FWTM: 24.0° / 44.0° Efficiency: 89 % LEDs/each optic: 1 Light colour: IR Required components:</p>	

OPTICAL RESULTS (SIMULATED):

	<p>LED: FWR1108MS FWHM / FWTM: 25.0° / 41.0° Efficiency: 92 % LEDs/each optic: 1 Light colour: IR Required components:</p>			
	<p>LED: MFN1107MS FWHM / FWTM: 25.0° / 42.0° Efficiency: 88 % Peak intensity: 4.6 cd/lm LEDs/each optic: 1 Light colour: IR Required components:</p>			
	<p>LED: MFN1108MS FWHM / FWTM: 26.0° / 42.0° Efficiency: 91 % Peak intensity: 4.8 cd/lm LEDs/each optic: 1 Light colour: IR Required components:</p>			
	<p>LED: MGN1107MS FWHM / FWTM: 25.0° / 42.0° Efficiency: 88 % Peak intensity: 4.7 cd/lm LEDs/each optic: 1 Light colour: IR Required components:</p>			

OPTICAL RESULTS (SIMULATED):

<p>STANLEY</p> <p>LED MGN1108MS FWHM / FWTM 26.0° / 42.0° Efficiency 91 % Peak intensity 4.8 cd/lm LEDs/each optic 1 Light colour IR Required components:</p>		
<p>STANLEY</p> <p>LED MJN1107MS FWHM / FWTM 25.0° / 42.0° Efficiency 92 % LEDs/each optic 1 Light colour IR Required components:</p>		
<p>STANLEY</p> <p>LED MJN1108MS FWHM / FWTM 26.0° / 41.0° Efficiency 93 % LEDs/each optic 1 Light colour IR Required components:</p>		

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)