


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!




**SPECIFICATIONS**

VOLTAGE & CURRENT: DC 24 V, 30 A  
 WITHSTANDING VOLTAGE: AC 2000 V/Min  
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V  
 TEMPERATURE RANGE: -40 °C ~ +105 °C  
 SCREW TORQUE VALUE: 10 Kgf.cm  
 WIRE RANGE: 22 - 12 AWG  
 1) MOLDED PARTS: Thermoplastic ( UL 94 V-0 )  
 2) TERMINAL: BRASS, 1.3t, Tin PLATED  
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M4  
 APPROVAL: (  ) Pending

RoHS Compliant

PART NUMBER:

OSTYK11E04030

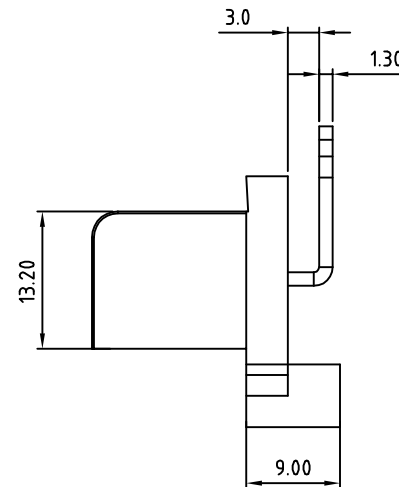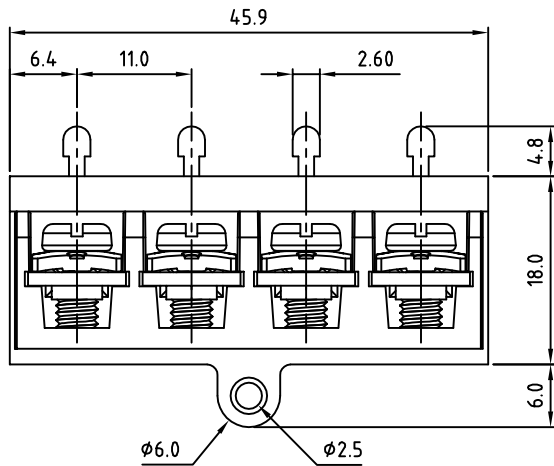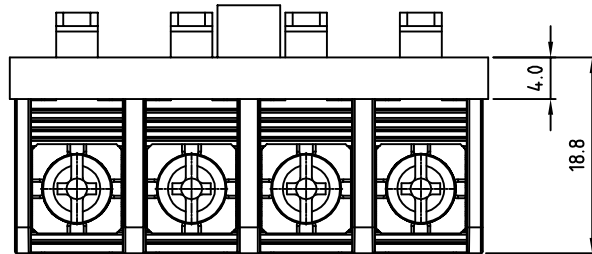

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTYK-11E-4P			DWG NO.		OSTYK11E04030.DWG	
PART NO.		OSTYK11E04030			APPROVED		Tolerance	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.	UNIT: mm		X. ±0.50
Shi Jun 2007.07.18		Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18	SHEET: 01/01		SCALE: NONE	X.X ±0.30
							REV.: D	X.XX ±0.10
								X° ±1°