



- 101-00042-\*\*
- 64 功能區鍍金1u",錫腳鍍亮純錫至少160u"
  - 65 功能區鍍金3u",錫腳鍍亮純錫至少160u"
  - 66 功能區鍍金5u",錫腳鍍亮純錫至少160u"
  - 67 功能區鍍金10u",錫腳鍍亮純錫至少160u"
  - 68 功能區鍍金15u",錫腳鍍亮純錫至少160u"

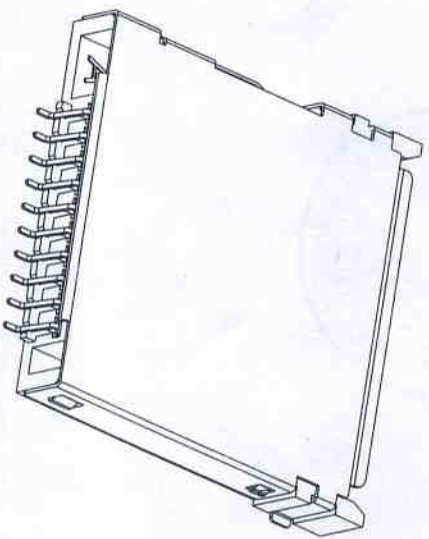

REV.	ECN NO.	MODIFY CONTENT	DATE
B	ES.00503.205	公差變更	03/26/05
C	ES.00604.018	變更金一層式	2006/04/04
D	ES.00710.005	修改鍍金厚度	2007/10/24

- Notes:
1. All Dimensions are in Millimeters.
  2. Operation voltage: 100 VAC max.
  3. Current rating : 1 Amps max.
  4. Contact resistance: 100m ohms max.
  5. Insulation resistance: 1000M ohms min. 500 VDC
  6. Dielectric withstanding voltage: 500 VAC / 1minute
  7. Operating Temperature: -20。 C to +60。 C
  8. Storage Temperature: -40。 C to +70。 C

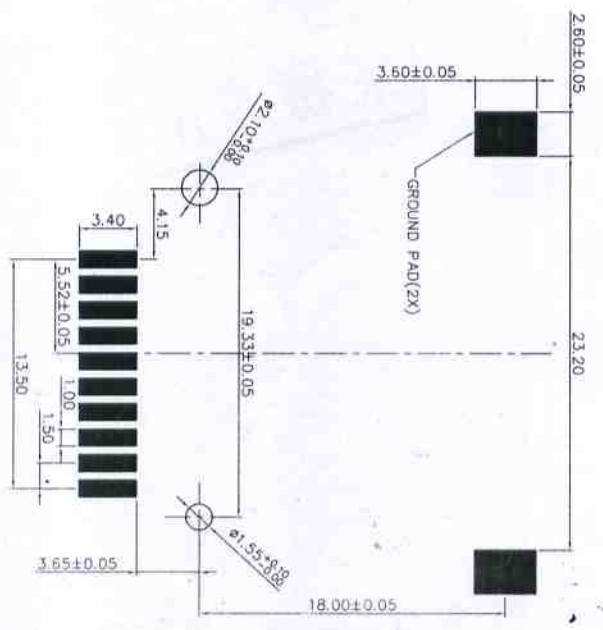

RECOMMENDED P.C.B LAYOUT (TOP VIEW)

GENERAL TOLERANCE		FILE NO.	PART. NO.		DRAWN	MATERIAL	
X. ±0.50	X. ±5°	101-00042	101-00042-**		黃銅	DATE	SCALE
.X±0.38	.X ±2°	REV.	TITLE	CHECKED		2007/10/24	UNIT
.XX±0.25	.XX ±1°	SIZE	MS. Q. ANN. 全包裝下一體式	APPROVED			MM
		A4	SHEET	1 OF 1			

SM Shouh Min Industry (Shenzhen) CO., LTD