



4X Ø4.32

REVISIONS ECO APPR REV DESCRIPTION DATE BY A1 30/NOV/18 ROOKIE TOMMY RELEASE NUMBER





REV: A1 SH:

SHEET 1

OF

12P RECEPTACLE, FLANGE MOUNT

AT04-12PX-L012

	SEE S	HEET 2				!
	PART N	IUMBER		DESCRIPTION	ITEM	۰
QUANTITY		MAT	ERI	ALS LIST		H
UNLESS OTHER	WISE SPECIFIED SIGNATUR		S DATE Amphonol			
2) Tolerances are		DRAWN: ROOKIE	30NOV/18	Amphenol		

ALE: NONE

UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm).	SIGN	IATURES	DATE	Amphono		
2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64	DRAWN:	ROOKIE	30/NOV/18	Ampheno		
2 PL DEC ±0.15 Angles ±1° 3 PL DEC ±0.08	CHECKED:	ORION	30/NOV/18	Sine Systems - www.amphenol-sine.com		
3) Note reference = X	ENGINEER:			44724 Morley Drive Clinton Township, MI 48036		
MATERIAL SPECIFICATIONS:	APPROVAL:	TOMMY	30/NOV/18	Clinton Township, Wii 46036		
	CUSTOMER:		•	12P RECEPTACLE, FLANGE MOUNT		
PROCESS SPECIFICATIONS:		G IS SUPPLIED F				
PROCESS SPECIFICATIONS:				D C- NIV4-12FA-LUIZ		
NEXT ASS'Y:		RING VARIATIONS	NORWAL S.	SCALE: NONE SHEET 1		

NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE SHEET 2 FOR KEY ARRANGEMENTS AND COLORS.

00000 **AMPHENOL**

000000

45.0

2. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER


23.9


- 3. MODIFICATIONS: FLANGE
- 4. SPECIFICATIONS:
 - 4.1 CURRENT RATING: 13 AMPS
 - 4.2 OPERATING TEMPERATURE: -55°C TO +125°C.
 - 4.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 4.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25℃.
 - 4.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 4.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 4.7 RoHS COMPLIANT
- 5. MATING PART: AT06-12SX* PLUG. (X=A,B,C,D KEYS, * = MODIFICATIONS AND COLORS)
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.



CONTACT	MIN. INSUL		TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG


		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NUMBER	30/NOV/18	ROOKIE	TOMMY








KEY C CONFIGURATION STANDARD COLOR:GREEN

KEY D CONFIGURATION STANDARD COLOR:BROWN










12P RECEPTACLE, FLANGE MOUNT


DWG NO:


AT04-12PX-L012


REV: A1 SH:

~









KEY-A	KEY-A CONFIGURATION				
COLOR	PART NUMBER				
GREY	AT04-12PA-L012				

KEY-B	KEY-B CONFIGURATION				
COLOR	PART NUMBER				
BLACK	AT04-12PB-L012				

KEY-C CONFIGURATION


COLOR PART NUMBER


GREEN AT04-12PC-L012


KEY-D	KEY-D CONFIGURATION				
COLOR	PART NUMBER				
BROWN	AT04-12PD-L012				

	SEE S	HEET 2							
	PART N	NUMBER				DE	SCRIPTION	ILEI	M
QUANTITY			MAT	ERI	ALS	S LI	ST		
	WISE SPECIFIED	SIGN	IATURES	DATE			mahanal		Т
1) All dimensions (2) Tolerances are (1 PL DEC ±0.30		DRAWN:	ROOKIE	30/NOV/18	Amphenol				
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION	30/NOV/18		Sin	e Systems - www.amphenol-sine.com		
3) Note reference	- 🗴	ENGINEER:			44724 Morley Drive				
MATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY	30/NOV/18	Clinton Township, MI 48036			_	
		CUSTOMER:			12P RECEPTACLE, FLANGE MOUNT				
			G IS SUPPLIED F I ONLY. DESIGN						
PROCESS SPECIFICA	TIONS:	SHOWN HERE THE AMPHENO OF REPRODUC	ON ARE THE PRODUCTION ARE IMPLEMENTATION ARE IMPLEMENTATION ARE IMPLEMENTATION ARE SUBJECT TO	OPERTY OF ON. NO RIGHTS JIED. ALL	B	C-	AT04-12PX-L012	A1	
NEXT ASS'Y:			ING VARIATION	S.	SCALE: N	ONE	SHEET 2 OI	- 3	_

		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APP
A1	-	RELEASE NUMBER	30/NOV/18	ROOKIE	томм

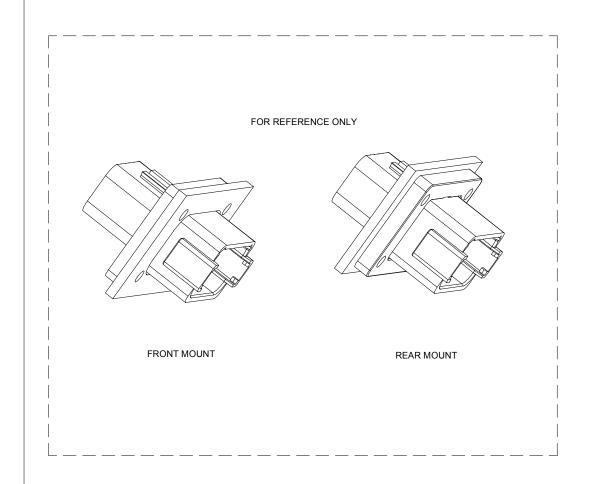

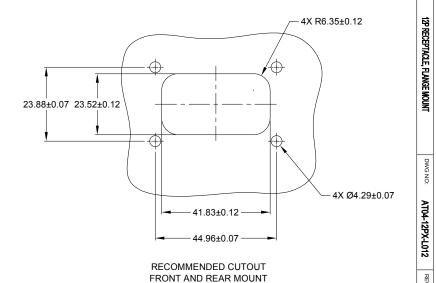

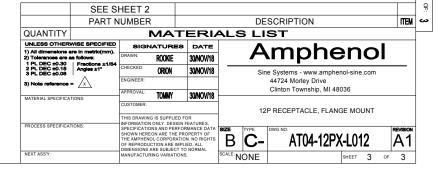

A

AT Series™ - Contact Size 16 Options

	Machined Contacts, Sockets & P	ins		
Part Number	Description	Size	AWG	Туре
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined

	T	ooling - Machined Contacts
Part	Part Number	Description
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)
5	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)

	Contact Removal Tools					
Part	Part Number	Description				
	ATRT-100	Used for removal of contacts for A Series™ products				
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16				
4	A114017	Sealing Plug, Size 16, White				

Stamped & Formed Contacts, Sockets & Pins					
Part Number	Description		AWG	Туре	
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed	
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed	
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed	
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed	
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed	
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed	
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed	
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed	
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed	
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed	
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed	
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed	
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed	
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed	
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed	
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed	

Tooling - Stamped & Formed Contacts				
Part	Part Number	Description		
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)		
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)		
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)		
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)		
K	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)		
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)		
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)		

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021