


Service package for PP7, PP17 I, PP17 II, 1x mounting seal PP7, 1x mounting seal PP17, 5x mounting clamps, 1x 24 V DC connector 2-pole, 1x 24 V DC connector 3-pole, 1x connector 4-pole, 2x connectors 16-pole

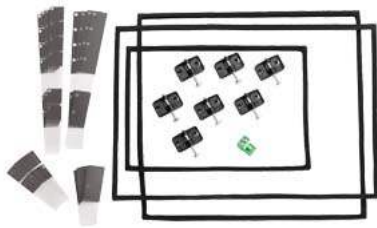

General information	
Product type designation	Service pack
Standards, approvals, certificates	
CE mark	Yes
Ambient conditions	
Ambient temperature during operation	
• min.	0 °C
• max.	55 °C
Ambient temperature during storage/transportation	
• min.	-20 °C
• max.	70 °C
Relative humidity	
• Operation, max.	95 %
Scope of supply	
Delivery quantity in pieces	1; Content: 1x mounting seal PP7, 1x mounting seal PP17, 5x plastic mounting clip, 1x 2-pin female connector, 1x 3-pin female connector, 1x 4-pin female connector, 2x 16-pin female connector
• Parts per unit	
Other	
Note:	for PP7, PP17-I, PP17-II
Usable in the following products	
• Product 1	<a href="#">6AV3688-3AA03-0AX0</a>
• Product 2	<a href="#">6AG1688-3CD13-4AX0</a>
• Product 3	<a href="#">6AG1688-3ED13-4AX0</a>
last modified:	12/16/2020