




REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PER ECN E07248	JUL25/07	L.CHAN



TOP VIEW

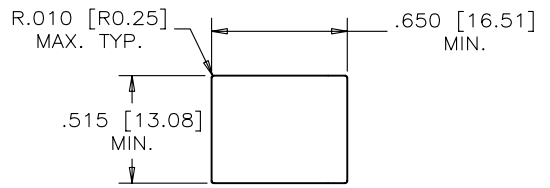


RECOMMENDED PANEL CUTOUT

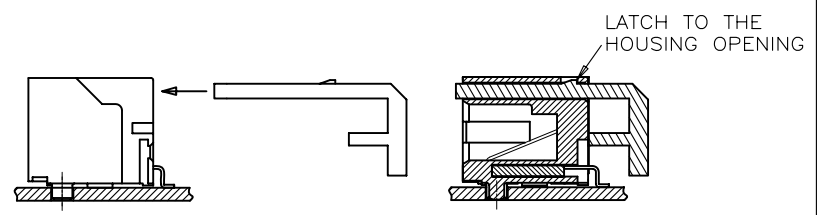


AFTER SOLDER REFLOW, LOAD LIGHT PIPE THROUGH THE CONNECTOR REAR ACCESS IN THE DIRECTION AS SHOWN

DATA CONTROL  
RELEASE  
DEPT. NO. ---626---  
REV. JAY BERRY



FRONT VIEW

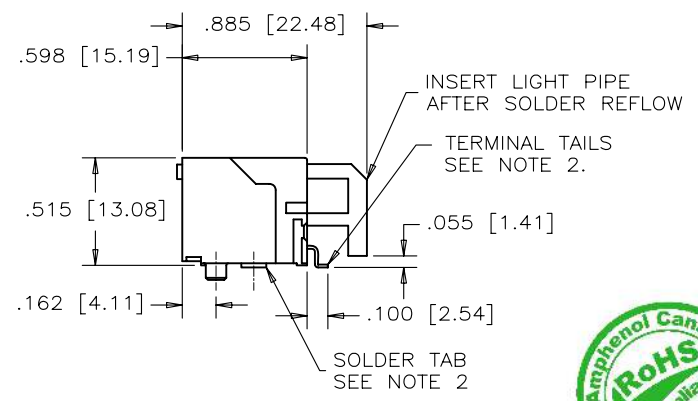

SIDE VIEW




NOTES

1. MATERIAL:


- HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
FLAMMABILITY RATING UL 94V-0  
COLOR:BLACK
- CONTACTS: PHOSPHOR BRONZE  
PLATING: 20 μ" [0.508 MICRONS]  
MIN. GOLD ON MATING SURFACES.  
50 μ" [1.27 MICRONS]  
MIN. NICKEL UNDERPLATE  
100 μ" [2.54 MICRONS]  
MIN. MATTE OR BRIGHT TIN  
ON CONTACT TAILS.
- LIGHT PIPE: CLEAR POLYCARBONATE  
FLAMMABILITY RATING UL 94V-0

2. COPLANARITY SPECIFICATION:

WITH THE MODULAR JACK SITTING ON A LEVEL SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING NAILS IS .004 [0.10].

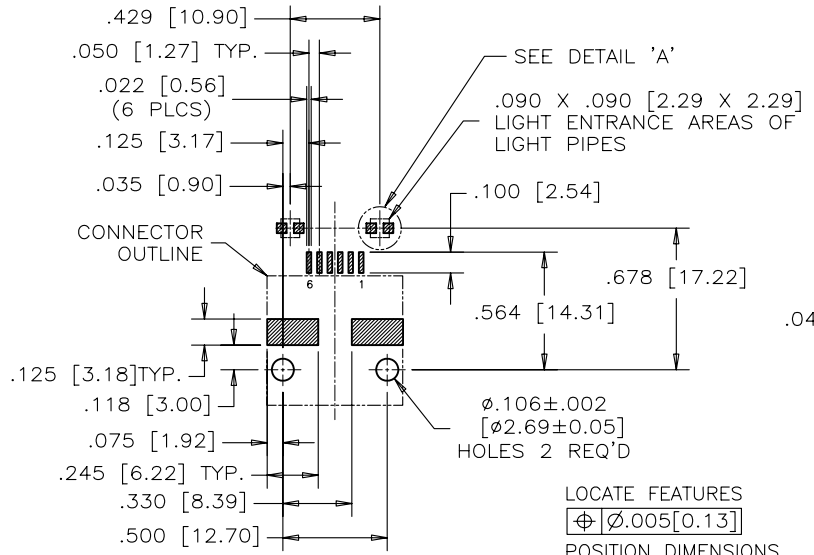

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)

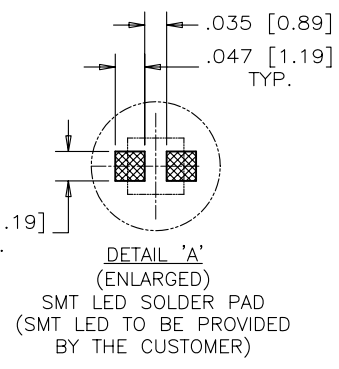

DETAIL 'A'  
(ENLARGED)  
SMT LED SOLDER PAD  
(SMT LED TO BE PROVIDED  
BY THE CUSTOMER)

LOCATE FEATURES  
⊕ ⌀.005 [0.13]  
POSITION DIMENSIONS  
ARE BASIC

PART NUMBER: RJSE-7061

MATERIAL -----	DRAWN	J.OUYANG	DATE	JUL25/07
	DESIGNED			
	CHECKED	CHIGOW		JUL25/07
	I. E. APPRD.	JEFFS		JUL25/07
FINISH -----	Q. A. APPRD.			
	DWG. APPRD.			
	ENG. REL. NO.	E07248		
	REF.	EAR # A070709		
DIMENSIONS ARE IN		CODE ID. NO.		
INCHES [mm]		03554		

**Amphenol Canada Corp.**  
TITLE SURFACE MOUNT, RJ11  
6 POSITION, 6 CONTACTS, UNSHIELDED,  
WITH LIGHT PIPES-ROHS COMPLIANT

DWG	DRAWING NO.	REV.
-	P-RJSSE-7061	A
SCALE	NTS	WT. -----
SURF. -----		SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.