

LQ084V1DG21

Color TFT-LCD Module
(Measuring instruments/Banking terminals)

Features

- 21 cm [8.4"] VGA format
- Low power consumption (5.42 W)
- Built-in long life CCFT backlight (50 000 h)

Specifications


Parameter		Unit	Parameter		Unit
Display size	21 [8.4]	cm ["]	Brightness	300	cd/m ²
Dot format (H x V)	640 x RGB x 480	dot	Contrast ratio	250 : 1	-
Dot pitch (H x V)	0.089 x 0.270	mm	Power consumption	5.42	W
Active area (H x V)	170.9 x 129.6	mm	Outline dimensions (W x H x D)*1	216.0 (221.0)*2 x 152.4 x 12.0	mm
Color	262 144	color	Weight	410	g
Input signal	6-bit digital RGB	-	Operating temperature	0 to +55	°C
Viewing direction	12:00	-	Storage temperature	-25 to +70	°C
Backlight type	CCFT	-			

*1...Without backlight and connector

*2...() value ... Including mounting tabs.

Outline Dimensions

unit : mm

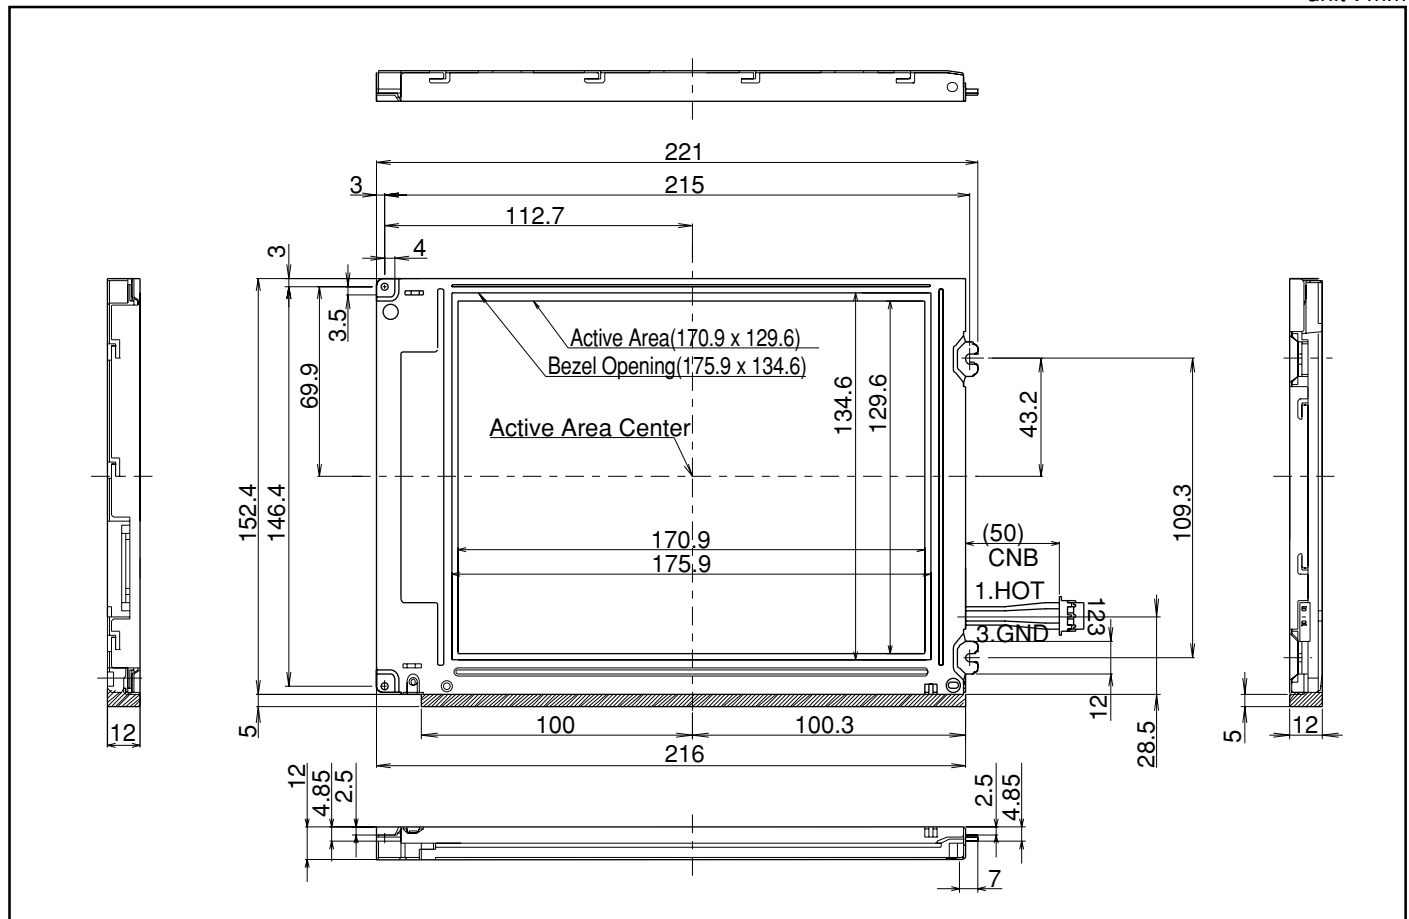

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

SHARP®

NORTH AMERICA

SHARP Microelectronics
of the Americas
5700 NW Pacific Rim Blvd.
Camas, WA 98607, U.S.A.
Phone: (360) 834-2500
Fax: (360) 834-8903
<http://www.sharpsma.com>

EUROPE

SHARP Microelectronics Europe
Sonninstraße 3
20097 Hamburg, Germany
Phone: (49) 40 2376-2286
Fax: (49) 40 2376-2232
<http://www.sharpsme.com>

ASIA

SHARP Corporation
Integrated Circuits Group
2613-1 Ichinomoto-Cho
Tenri-City, Nara, 632, Japan
Phone: +81-743-65-1321
Fax: +81-743-65-1532
<http://www.sharp.co.jp>