


# HC-DD 72-ESTC-144

Order No.: 1674749

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1674749>HEAVYCON male insert, DD72 series, 72-pos., crimp connection,  
numbering from 73-144

| Commercial data          |   |
|--------------------------|---|
| GTIN (EAN)               | <br>4 017918 144661 |
| Note                     | Made-to-order   |
| sales group              | D005  |
| Pack                     | 10 pcs.   |
| Customs tariff           | 85366990  |
| Catalog page information | Page 361 (PC-2007)  |

**Product notes**WEEE/RoHS-compliant since:  
03/01/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data**

| General data      |  |
|-------------------|--|
| Note              | For HEAVYCON ADVANCE housing of B16 type and HEAVYCON housing of B32 type, crimp contacts CK 1,6-ED (crimp contacts not included in the scope of supply). Plug-in connections may only be operated only when there is no load/voltage. |
| Connection method | Crimp connection   |

|   |  |
|---|--|
| Ambient temperature (operation)         | -40 °C ... 125 °C (including heating up of contacts)   |
| Pollution degree                        | 3  |
| Surge voltage category                  | III  |
| Constructional and testing regulations  | DIN VDE 0627/86  |
|   | DIN VDE 0110/02.79   |
|   | DIN VDE 0110-1/04.97   |
|   | IEC 60664-1, DIN IEC 60512   |
|   | IEC 60352  |
| Number of positions                     | 72   |
| Insertion/withdrawal cycles             | ≥ 500  |
| Design                                  | DD72   |
| Connection in acc. with standard        | IEC / EN   |
| Conductor cross-section                 | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>   |
| Connection cross-section AWG            | 26 ... 14  |
| Stripping length of the individual wire | 8 mm   |
|   | 6 mm (2.5 mm <sup>2</sup> )  |
| Assembly instructions                   | -Housing heights with h ≥ 72 mm are recommended in the case of a large number of wires.-Use of HC-CST (1676857) keying pins and HC-CBU (1676860) coding sockets has been prescribed. |

#### Material data

|                                    |                       |
|------------------------------------|-----------------------|
| Inflammability class acc. to UL 94 | V0                    |
| Contact material                   | Copper alloy          |
| Contact surface material           | Ag (alternatively Au) |
| Contact carrier material           | PA                    |

#### Electrical characteristics

|                       |       |
|-----------------------|-------|
| Rated voltage (III/3) | 250 V |
| Rated surge voltage   | 4 kV  |
| Rated current         | 10 A  |

#### Certificates / Approvals



Certification


GOST

**Accessories**

| Item           | Designation | Description   |
|----------------|-------------|---|
| <b>General</b> |             |   |
| 1644326        | HC-B-3PE    | PE multiplier, for three PE connections, for HC-B (besides HC-B..E..ZZ) / HC-BB / HC-DD / HC-D40 / HC-D64 contact inserts |
| 1604997        | HC-B-PES    | PE screw, for contact inserts HC-B / HC-BB / HC-DD / HC-D40 / HC-D64  |
| 1685327        | HC-B-ZG     | Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, straight cable exit                       |
| 1685330        | HC-B-ZS     | Strain relief clamps contact inserts of series: B-, BB-, D 40, D 64, DD and HV, lateral cable exit                        |
| 1772722        | HC-CB       | Coding pin, prevents mismatching of up to six plug connectors with an identical number of positions                       |
| 1676860        | HC-CBU      | Keying socket for coding up to 16 plug connectors   |
| 1676857        | HC-CST      | Keying peg for coding up to 16 plug connectors  |


**Diagrams/Drawings**

Diagram

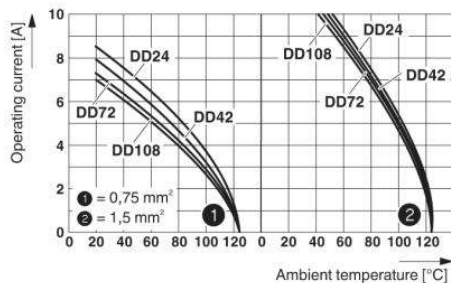

Derating diagram

Dimensioned drawing

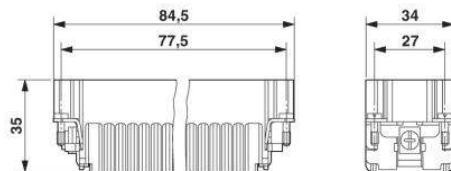


Mounting cut-out

Male insert

Schematic diagram

---

Connector pin assignment, connection side

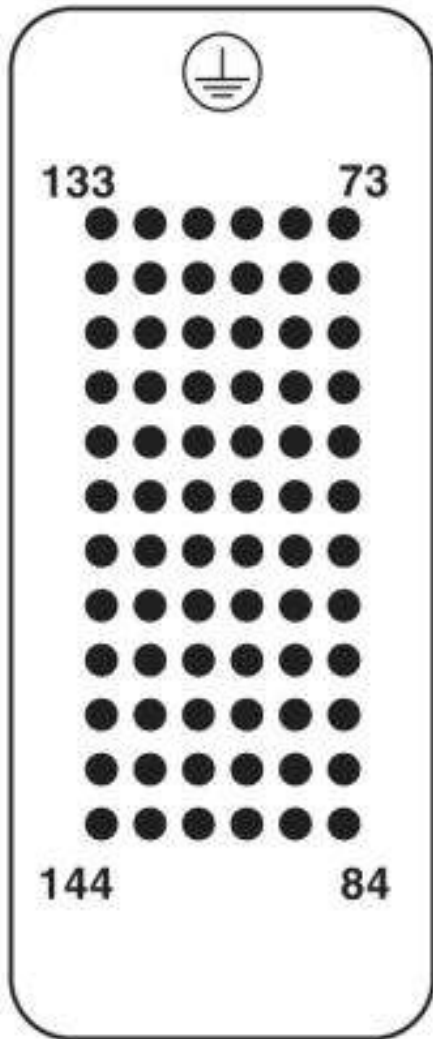

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;