MATERIALS & SPECIFICATIONS

A22026-001 PART NO.

REV ECO С 96877

ACTUAL SIZE

APP DATE 07 - 13 - 10TLM

INSULATOR:

LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138.

CONTACT:

COPPER ALLOY PER MIL-DTL-83513. GOLD PLATE PER ASTM B488, (HARD GOLD) TYPE II CODE C, CLASS 1.27.

TERMINATION:

COPPER ALLOY PER MIL-DTL-83513 GOLD PLATED PER ASTM B488, (HARD GOLD) TYPE II CODE C CLASS 1.27.

LATCH BOX:

BERYLLIUM COPPER PER ASTM B194 NICKEL PLATE PER AMS-C-26074.

CURRENT CAPACITY:


3 AMP MAX.


CONTACT RESISTANCE:


26 MILLIOHMS (65mV) MAX @ 2.5 AMPS.

PERFORMANCE:

PRODUCT FAMILY TESTED TO AND PASSED THE PERFORMANCE SPECIFICATIONS OF TABLE VII OF MIL-DTL-

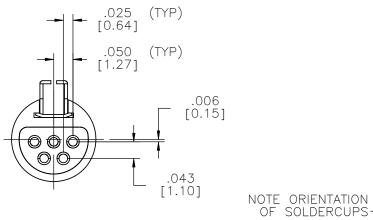



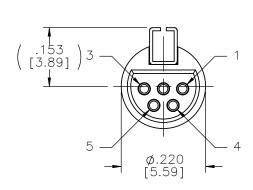

REF: OMNETICS

THIRD ANGLE⊕⊖ THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF OMNETICS CONNECTOR CORP. THIS DOCUMENT MAY NOT, IN WHOLE OR IN PART, BE DUPLICATED, OF -TOLERANCES-DISCLOSED FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM OMNETICS CONNECTOR CORP DFTM. TEP 2 PL DEC± .01 3 PL DEC± .005 4 PL DEC± .0005 ANGLES ± 1° (5) SOCKET FEMALE CHK'D. MICRO CIRCULAR CONNECTOR W/ LATCH APP'D.

CONNECTOR CORPORATION A22026-001

7260 COMMERCE CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.OMNÉTICS.COM

CAGE CODE **61873** DWG NO.

SHEET 1 OF 1 REV SCALE: 4: