

**Sales Outline Drawing**

Revision **A**


**Specifications:**

Oscillation Frequency (Hz)	2000 ~ 2500
Operating Voltage (Vp-p)	3 ~ 10
Rated Voltage (Vp-p)	6
Current Consumption Max. (mA)	40 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance ( $\Omega$ )	$60 \pm 9$
Operating Temperature ( $^{\circ}\text{C}$ )	$-30 \sim +70$
Storage Temperature ( $^{\circ}\text{C}$ )	$-40 \sim +85$
Housing	NORYL
Weight (Grams)	7.0
Options	For other options contact factory


PS: Vp-p = 1/2duty, square wave

**RoHS Compliant**

**Dimensions:** (units: mm)

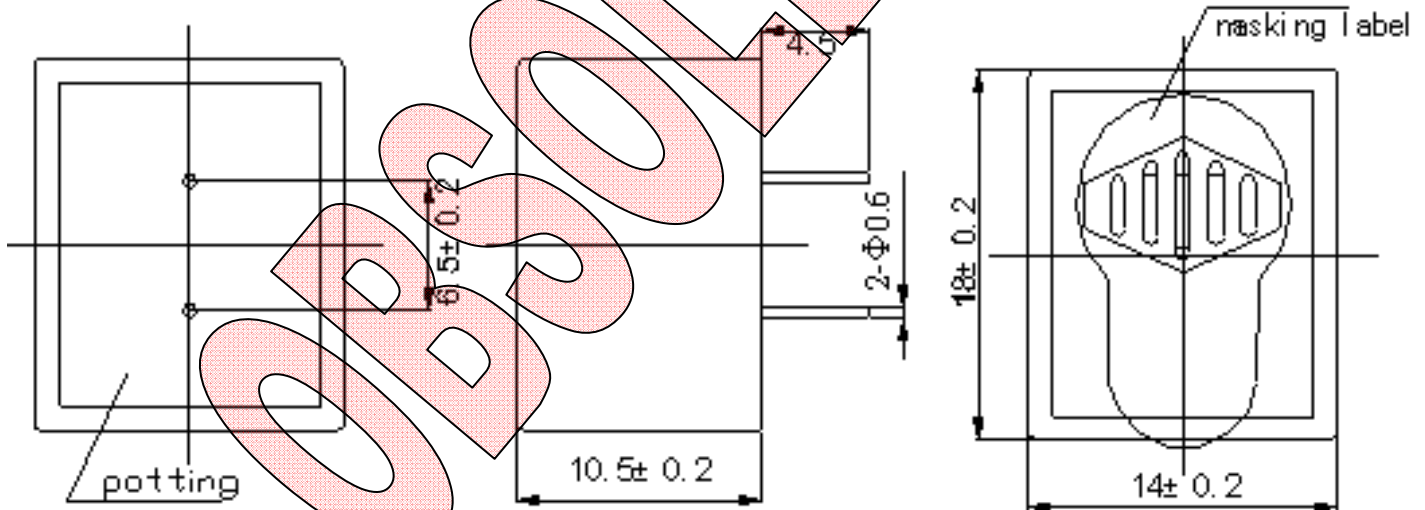

**Recommended Driving Circuit:**

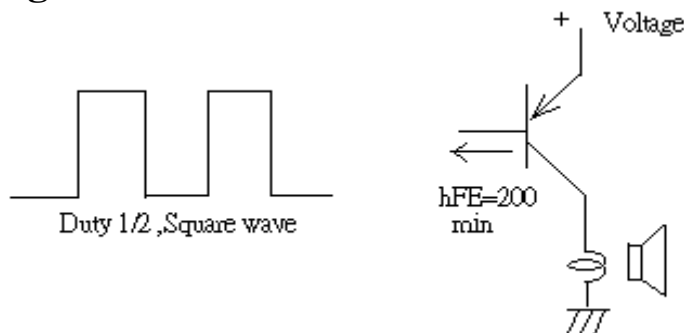

The base current  $I_b$  should be high enough so that it saturates the collector current of the transistor with the CB load.