

1424840

https://www.phoenixcontact.com/us/products/1424840

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupling housings B32, with double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, straight, 1x Pg36, height: 99.8 mm, cable gland: none, Standard

Your advantages

• Good shielding in the event of electromagnetic interference

Commercial data

Item number	1424840
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF56
Product key	BF7APB
Catalog page	Page 644 (C-2-2019)
GTIN	4055626382456
Weight per piece (including packing)	457.4 g
Weight per piece (excluding packing)	444 g
Customs tariff number	85389099
Country of origin	CN



1424840

https://www.phoenixcontact.com/us/products/1424840

Technical data

Product properties

Туре	B32
Product type	Housing with locking latch
Application	Standard
No. of cable outlets	1
Type of the screw connection	1x Pg36
Housing type	Coupling housings
Cable outlet	straight
Pg screw connection	none

Dimensions

Dimensional drawing	129.5
Width	82.5 mm
Height	99.8 mm
Length	94 mm

Material specifications

Flammability rating according to UL 94	V0 (Interlock)
Seal material	NBR, conductive
Housing surface material	uncoated
Locking latch material	PA
Impact strength	IK09
Housing material	Die-cast aluminum, salt water resistant

Mechanical properties

Mechanical data

Type of the screw connection	1x Pg36
Locking type	Latch

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP67
Degree of protection (NEMA)	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)



1424840

https://www.phoenixcontact.com/us/products/1424840

Impact strength	IK09
Ambient temperature (operation)	-40 °C 125 °C





1424840

https://www.phoenixcontact.com/us/products/1424840

Drawings

Dimensional drawing

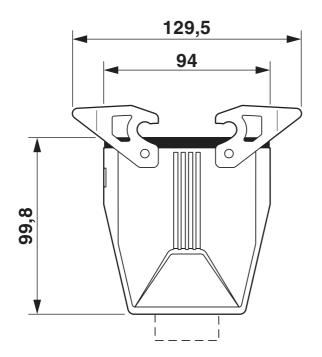

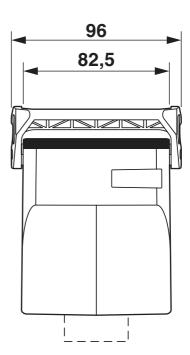

Dimensional drawing



1424840

https://www.phoenixcontact.com/us/products/1424840

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1424840

DNV

Approval ID: TAE000037S



cUL RecognizedApproval ID: E255026



UL RecognizedApproval ID: E255026



EAC

Approval ID: RU C-DE.BL08.B.00511

cULus Recognized



1424840

https://www.phoenixcontact.com/us/products/1424840

Classifications

UNSPSC 21.0

ECLASS

ECLAS	S-11.0	27440202
ECLAS	S-12.0	27440202
ECLAS	S-13.0	27440202
ETIM		
ETIM 8.	0	EC000437
UNSPSC		

31261500



1424840

https://www.phoenixcontact.com/us/products/1424840

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



1424840

https://www.phoenixcontact.com/us/products/1424840

Accessories

WP-G PP HF PG21 - Screw connection

3240992

https://www.phoenixcontact.com/us/products/3240992



Cable gland made from PP with Pg thread, IP65 protection

WP-G PP HF PG36 - Screw connection

3240994

https://www.phoenixcontact.com/us/products/3240994



Cable gland made from PP with Pg thread, IP65 protection



1424840

https://www.phoenixcontact.com/us/products/1424840

WP-GT PP HF PG36 - Screw connection

3241008

https://www.phoenixcontact.com/us/products/3241008



Cable gland made from PP with Pg thread, rotatable, IP54 protection

WP-G BRASS IP40 PG36 - Screw connection

3241043

https://www.phoenixcontact.com/us/products/3241043



Cable gland made from brass with Pg thread, IP40 protection



1424840

https://www.phoenixcontact.com/us/products/1424840

WP-GT BRASS PG36 - Screw connection

3241029

https://www.phoenixcontact.com/us/products/3241029



Cable gland made from brass with Pg thread, rotatable, IP40 protection

WP-G BRASS IP65 PG36 - Screw connection

3241057

https://www.phoenixcontact.com/us/products/3241057



Cable gland made from brass with Pg thread, IP65 protection

Phoenix Contact 2023 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com