


# Data sheet

## chainflex® CF37.D





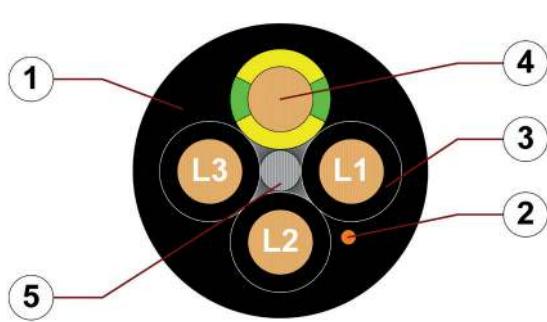



Motor cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● UV-resistant ● Hydrolysis and microbe-resistant



1. Outer jacket: Pressure extruded, gusset-filling, halogen-free TPE mixture
2. CFRIP: Tear strip for faster cable stripping
3. Core insulation: Mechanically high-quality, especially low-capacitance XLPE mixture
4. Conductor: Especially bending-stable version consisting of bare copper wires
5. Strain relief: Tensile stress-resistant centre element

**Example image**  
For detailed overview please see design table

### Cable structure

|   |   |
|---|---|
|  | <p><b>Conductor</b></p> <p><b>Cores &lt; 10 mm<sup>2</sup>:</b> Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).<br/> <b>Cores ≥ 10 mm<sup>2</sup>:</b> Conductor cable consisting of pre-leads (following DIN EN 60228).</p> |
|  | <p><b>Core insulation</b></p> <p>Mechanically high-quality, especially low-capacitance XLPE mixture.</p>  |
|  | <p><b>Core structure</b></p> <p>Cores wound with a short pitch length around a high tensile strength centre element.</p>  |
|  | <p><b>Core identification</b></p> <p>Black cores with white numbers, one green-yellow core.<br/>           1. Core: U / L1 / C / L+ 2. Core: V / L2<br/>           3. Core: W / L3 / D / L- 4. Core: 4 / N</p>  |
|  | <p><b>Outer jacket</b></p> <p>Low-adhesion, extremely abrasion-resistant and highly flexible TPE mixture, adapted to suit the requirements in e-chains®.<br/>           Colour: Jet black (similar to RAL 9005)<br/>           Printing: white</p>  |
|  | <p><b>CFRIP®</b></p> <p>Strip cables faster: a tear strip is moulded into the outer jacket<br/>           Video ▶ <a href="http://www.igus.eu/CFRIP">www.igus.eu/CFRIP</a></p>  |

„00000 m“\* igus chainflex CF37.--.D① ----② 600/1000V E310776

RU AWM Style 22351 90°C 1000V EAC CE UKCA DESINA RoHS-II conform

[www.igus.eu](http://www.igus.eu) +++ chainflex cable works +++

\* **Length printing:** Not calibrated. Only intended as an orientation aid.  
 ① / ② Cable identification according to Part No. (see technical table).  
 Example: ... chainflex ... CF37.15.04.D ... 4G1.5 ... 600/1000V ...









# Data sheet

## chainflex® CF37.D



Motor cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● UV-resistant ● Hydrolysis and microbe-resistant

### Dynamic information

|   |                        |   |   |
|---|------------------------|---|---|
|  | <b>Bend radius</b>     | <b>e-chain® linear</b><br><b>flexible</b><br><b>fixed</b> | minimum 7.5 x d<br>minimum 6 x d<br>minimum 4 x d   |
|  | <b>Temperature</b>     | <b>e-chain® linear</b><br><b>flexible</b><br><b>fixed</b> | -35 °C up to +90 °C<br>-50 °C up to +90 °C (following DIN EN 60811-504)<br>-55 °C up to +90 °C (following DIN EN 50305) |
|  | <b>v max.</b>          | <b>unsupported</b><br><b>gliding</b>                      | 10 m/s<br>6 m/s   |
|  | <b>a max.</b>          |   | 80 m/s <sup>2</sup>   |
|  | <b>Travel distance</b> |   | Unsupported travel distances and up to 400 m for gliding applications, Class 6  |
|  | <b>Torsion</b>         |   | Torsion ± 90°, with 1 m cable length, Class 2   |



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.


### Guaranteed service life according to guarantee conditions

| Double strokes                   | 5 million                  | 7.5 million                | 12.5 million               |
|----------------------------------|----------------------------|----------------------------|----------------------------|
| <b>Temperature, from/to [°C]</b> | <b>R min. [Faktor x d]</b> | <b>R min. [Faktor x d]</b> | <b>R min. [Faktor x d]</b> |
| -35/-25                          | 10                         | 11                         | 12                         |
| -25/+80                          | 7.5                        | 8.5                        | 9.5                        |
| +80/+90                          | 10                         | 11                         | 12                         |

Minimum guaranteed service life of the cable under the specified conditions.  
The installation of the cable is recommended within the middle temperature range.

### Electrical information

|   |                        |  |
|---|------------------------|--|
|  | <b>Nominal voltage</b> | 600/1000 V (following DIN VDE 0298-3)<br>1000 V (following UL) |
|  | <b>Testing voltage</b> | 4000 V (following DIN EN 50395)                                |



Example image



# Data sheet

## chainflex® CF37.D



Motor cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● UV-resistant ● Hydrolysis and microbe-resistant

### Properties and approvals

-  **UV resistance** High
-  **Oil resistance** Oil-resistant (following DIN EN 60811-404), bio-oil-resistant (following VDMA 24568 with Plantocut 8 S-MB tested by DEA), Class 4
-  **Silicone-free** Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
-  **Halogen-free** Following DIN EN 60754
-  **UL verified** Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
-  **UL AWM** Details see table UL AWM
-  **EAC** Certificate No. RU C-DE.ME77.B.02324 (TR ZU)
-  **REACH** In accordance with regulation (EC) No. 1907/2006 (REACH)
-  **Lead-free** Following 2011/65/EC (RoHS-II/RoHS-III)
-  **Cleanroom** According to ISO Class 1. The outer jacket material of this series complies with CF9.15.07 - tested by IPA according to standard DIN EN ISO 14644-1
-  **DESINA** According to VDW, DESINA standardisation
-  **CE** Following 2014/35/EU
-  **UKCA** In accordance with the valid regulations of the United Kingdom (as at 08/2021)



### Properties and approvals

UL AWM details

| Conductor nominal cross section [mm <sup>2</sup> ] | UL style core insulation | UL style outer jacket | UL Voltage Rating [V] | UL Temperature Rating [°C] |
|--|--------------------------|-----------------------|-----------------------|----------------------------|
| 1.5  | 30052                    | 22351                 | 1000                  | 90                         |
| 2.5  | 30052                    | 22351                 | 1000                  | 90                         |
| 4  | 30052                    | 22351                 | 1000                  | 90                         |
| 6  | 30052                    | 22351                 | 1000                  | 90                         |
| 10   | 30052                    | 22351                 | 1000                  | 90                         |
| 16   | 30052                    | 22351                 | 1000                  | 90                         |
| 25   | 30052                    | 22351                 | 1000                  | 90                         |
| 50   | 30052                    | 22351                 | 1000                  | 90                         |

Example image



# Data sheet

## chainflex® CF37.D




Motor cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● UV-resistant ● Hydrolysis and microbe-resistant



Example image

### Typical lab test setup for this cable series

|                    |                                      |
|--------------------|--------------------------------------|
| Test bend radius R | approx. 55 - 250 mm                  |
| Test travel S      | approx. 1 - 15 m                     |
| Test duration      | minimum 2 - 4 million double strokes |
| Test speed         | approx. 0.5 - 2 m / s                |
| Test acceleration  | approx. 0.5 - 1.5 m / s <sup>2</sup> |

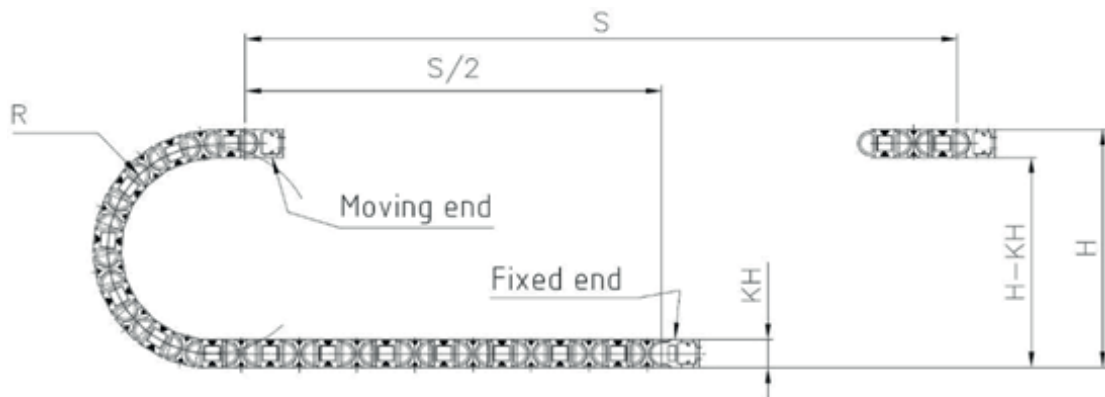

### Typical application areas

- For extremely heavy duty applications, Class 7
- Unsupported travel distances and up to 400 m and more for gliding applications, Class 6
- Almost unlimited resistance to oil, also with bio-oils, Class 4
- Torsion ± 90°, with 1 m cable length, Class 2
- Indoor and outdoor applications, UV-resistant
- Storage and retrieval units for high-bay warehouses, Machining units/machine tools, quick handling, Clean room, semiconductor insertion, outdoor cranes, low temperature applications



# Data sheet

## chainflex® CF37.D



Motor cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● UV-resistant ● Hydrolysis and microbe-resistant

### Technical tables:

#### Mechanical information

| Art.-Nr.           | Number of cores and conductor nominal cross section [mm <sup>2</sup> ] | Outer diameter (d) max. [mm] | Copper index [kg/km] | Weight [kg/km] |
|--------------------|--|------------------------------|----------------------|----------------|
| CF37.15.04.D       | 4G1.5  | 8.0                          | 61                   | 95             |
| CF37.25.04.D       | 4G2.5  | 10.0                         | 100                  | 149            |
| CF37.40.04.D       | 4G4.0  | 11.5                         | 163                  | 221            |
| CF37.60.04.D       | 4G6.0  | 13.5                         | 237                  | 317            |
| CF37.60.05.D       | 5G6.0  | 15.0                         | 297                  | 387            |
| CF37.100.04.D      | 4G10   | 16.5                         | 407                  | 503            |
| CF37.100.05.D      | 5G10   | 19.0                         | 515                  | 634            |
| CF37.160.04.D      | 4G16   | 20.0                         | 646                  | 773            |
| CF37.160.05.D      | 5G16   | 22.5                         | 815                  | 963            |
| CF37.250.04.D      | 4G25   | 24.0                         | 1014                 | 1203           |
| CF37.500.03.O.PE.D | 3x50   | 30.0                         | 1530                 | 1826           |

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core


#### Electrical information

| Conductor nominal cross section [mm <sup>2</sup> ] | Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km] | Max. current rating at 30 °C [A] |
|--|---|----------------------------------|
| 1.5  | 13.3  | 21                               |
| 2.5  | 7.98  | 30                               |
| 4  | 4.95  | 41                               |
| 6  | 3.3   | 53                               |
| 10   | 1.91  | 74                               |
| 16   | 1.21  | 99                               |
| 25   | 0.78  | 131                              |
| 50   | 0.39  | 202                              |

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image  
igus® chainflex® CF37.D



# Data sheet

## chainflex® CF37.D



Motor cable (Class 7.6.4.2) ● For heaviest duty applications ● TPE outer jacket ● Oil and bio-oil resistant ● PVC and halogen-free ● UV-resistant ● Hydrolysis and microbe-resistant

### Design table

| Part No.          | Number of cores | Core design  |
|-------------------|-----------------|--|
| CF37.XX.03.O.PE.D | 3               |    |
| CF37.XX.04.D      | 4               |    |
| CF37.XX.05.D      | 5               |  |



Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

