

|--|



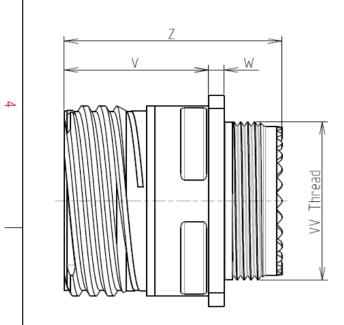

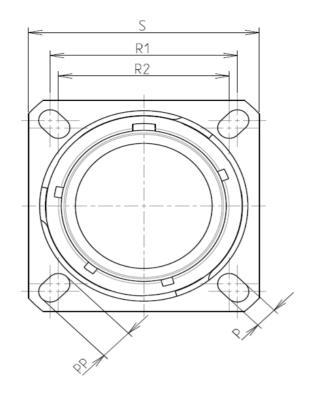

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

/	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
2	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	_: -65°C to +200°C			
	-Salt Spray	: 48 hours			
	-Mass	: 22.11 g ± 10%			

8D 0

G

13

-

F

26

В

F

В


Dim Nom P 3.25 PP 4.93 R1 23.	±0.2
PP 4.93	
	±0.2
R1 23.	
	.01
R2 20.	62
S 28.6	±0.3
V 20.83+	0/-1.25
W 2.1/	2.5
Z 31.5	Max
VV THREAD M18>	(1-6g


ORIENTATION : B

CONTACT LAYOUT : 13-26

CONTACT TYPE : SOCKET(500 Matings)

Е



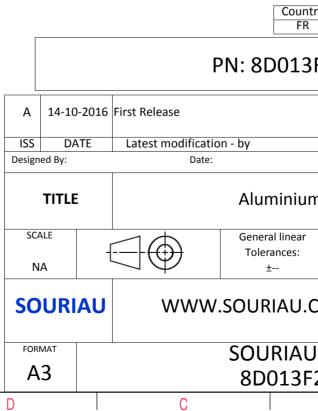

Φ	Þ						
		4					
AS EXAMPLE		3					
idation, technical	comply with r by a third party	2					
	CUSTOMER DRAWING	-					
	m Receptacle 8D series						
ar :	NPRDS / PROJECT 859						
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	• SHEET 1/2						
F26BB-C	A						

-	т	۵	<u>п</u>	m		0
		Contact Layout				Panel Cutou
4		26			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
_		2#12 6#22D	1		¥ ~	
ω	Ctc A B C D E F 1 2	X Y 0 3.47 2.47 4.34 2.47 -4.34 0 -3.47 -2.47 -4.34 -2.47 4.34 3.25 0 -3.25 0				Dim ØA ØA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						PN: 8D013F
_					A 14-10-20 ISS DATE Designed By:	16 First Release
					SCALE	Aluminium General linear Tolerances:
-					SOURIA	U WWW.SOURIAU.C
				F (1	FORMAT A3	SOURIAU 8D013F2
	Н	G	l F	I E	D	C

