

OmniPreSense OPS8243 Water Level Monitor

OmniPreSense's OPS8243 is a simple to use water level monitor for use in applications such as river, creek, or lake height monitoring. The sensor can detect objects at distances up to 40m/131 ft. A simple API provides filtering of ranges and setting alerts for objects detected in range. The OPS8243 has a narrow 20° x 24° field of view to allow focusing on specific areas of interest.

Features

- 40m (131 ft.) detection range
- 2 cm/0.8 in. resolution
- Narrow 20° beam width (-3 dB)
- Simple API control with Alerts
- RS-232 or WiFi interface
- Immune to noise (sunlight, dust, rain)
- IP67 Enclosure
- Industrial temp operation (-40 to +85°C)
- ≤2.5W Active power, 0.6W Idle power
- 130 x 130 x 61mm (5 x 5 x 2.4 in.)

Applications


- River, Creek, or Lake Level Monitoring
- Silo Dry or Wet Good Level Detection
- Conveyor Belt Material Height Monitoring

Functionality

- Height Reporting
- Hi/Lo Level Alerts
- Height Noise Filtering



OPS8243 Traffic Monitor

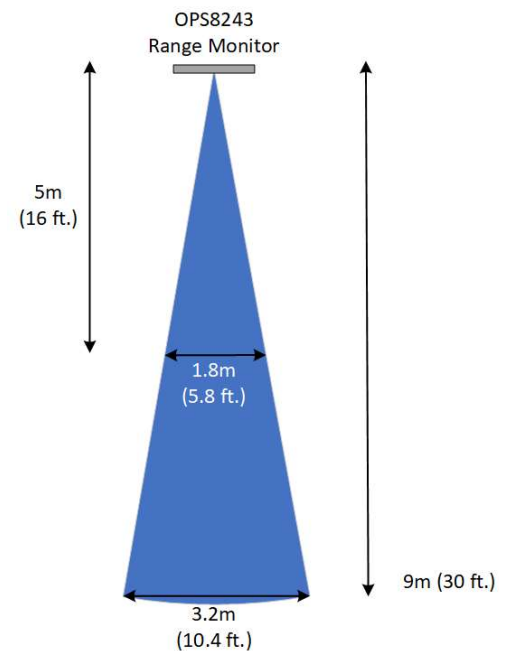

OPS8243 Field of View

Ordering Part Number

Radar Sensor	Interface
OPS8243-C-R2	RS-232
OPS8243-C-WB-PE	WiFi/Bluetooth