

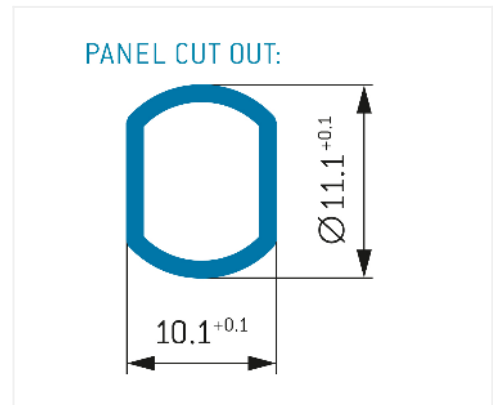


**GKOYAR-PO7XDDO-ROOL**  
**easy\_clean, type\_gk**

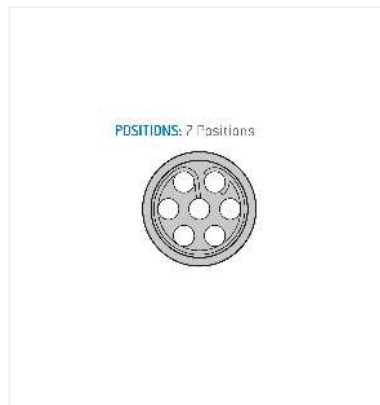

**General information**

<b>Part number</b>	GKOYAR-PO7XDDO-ROOL
<b>Termination</b>	solder
<b>Size</b>	0
<b>Locking principle</b>	break , push
<b>Coding</b>	a_key_amc
<b>Cable Diameter</b>	cable_amc_0

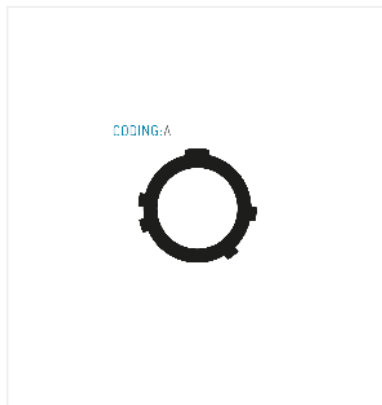

**Contact insert description**

<b>Number of contacts</b>	7
<b>Contact type</b>	spring_contact
<b>Contact diameter</b>	06mm
<b>Insulator material</b>	peek
<b>Wire cross section</b>	26_awg
<b>Termination</b>	solder
<b>Termination diameter</b>	065mm

reverse\_gender\_on\_request

**Technical information**

<b>Nominal current single contact</b>	02_a	iec_60512_5_2
<b>Nominal current insert</b>	1,3 A	vde_0298_4
<b>Test voltage</b>	06_kv_ac	eia_364_20f

safety\_text

**Mechanical and environmental data**

<b>Degree of protection*</b>	ipsk8_ip6k9k
<b>Operating temperature</b>	51_125_c
<b>Mating cycles</b>	5000

mated

### Material and surface treatments

<b>Housing</b>	ruthenium
<b>Contact</b>	cu_alloy_gold

safety\_text\_2  
ul\_text  
illustrative\_text