

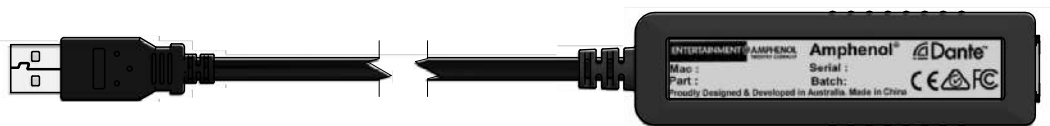


USB 2.0 TYPE A PLUG



SPECIFICATIONS		
ELECTRICAL	Power Consumption	< 2 Watt
	Power Over Ethernet or USB	Class 1 IEEE 802.3af POE PD Compliant
DANTE® AUDIO	Sample Rate	48 kHz
	Bit Depth	24 bits
	Network Speed	100 Mbps
	Network Interface	Latency from 1ms
CLIMATIC	Network Transport	Dante Audio over IP, AES67 RTP
	Protection Class	IP40
MECHANICAL	Operating Temperature	-5°C to +60°C (23°F to +140°F)
	Insertion and Withdrawal Force	≥10N - ≤35N
MATERIALS	Weight	110g (0.243lb)
	Housing	Overmolded PVC 60P Black

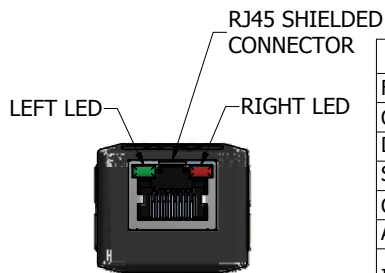

RJ45 SHIELDED CONNECTOR

LEFT LED

RIGHT LED

LED STATUS			
FUNCTION	LEFT LED	RIGHT LED	COMMENT
Off	Off	Off	No Power
Device is booting	Solid GREEN	Solid RED	
Slave with sync	Blinking GREEN	Solid GREEN	Normal Operation
Clock Master	Blinking GREEN	Blinking GREEN	Normal Operation
Any runtime error	Blinking GREEN	Blinking RED	Normal Operation
Identify	Alternating RED and GREEN	Alternating RED and GREEN	Blinking for 6 seconds (cycle every 0.5 seconds)
Failsafe (bootloader)	Blinking RED	Blinking RED	Failsafe, Corrupt Capability (red in DC)
Upgrade	Blinking ORANGE	Blinking ORANGE	Device is upgrading

RJD32U1-0050
SERIES PREFIX
ADAPTER TYPE
 USB I/O, 2 CHANNELS IN - 2 CHANNELS OUT
LENGTH IN cm
 (STANDARD LENGTH = 50cm)



UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE		THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				Amphenol Amphenol Australia Pty.Ltd, 22 Industry Blvd Carrum Downs, VIC 3201		
LINEAR	ANGULAR	MATERIAL:	DRN:	B.V.	DATE:	TITLE:	PART No:	REV
X.X ±0.5	X° ±1	SEE PARTS LIST	CKD:	P.M.	DATE:	AMPHE-DANTE ADAPTER, USB I/O, 2x2	55011327-000	1
X.XX ±0.05	X'X' ±30'	DO NOT SCALE	APP'D:	P.M.	DATE:	DRAWING No.	55011327-000-1	SHEET
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS		FINISH: N/A	SCALE:	NTS	DATE:			2/2
DIMENSIONS IN MILLIMETRES		THIRD ANGLE PROJECTION						