




Carbon Black Polyurethane
Palm Coated Glove

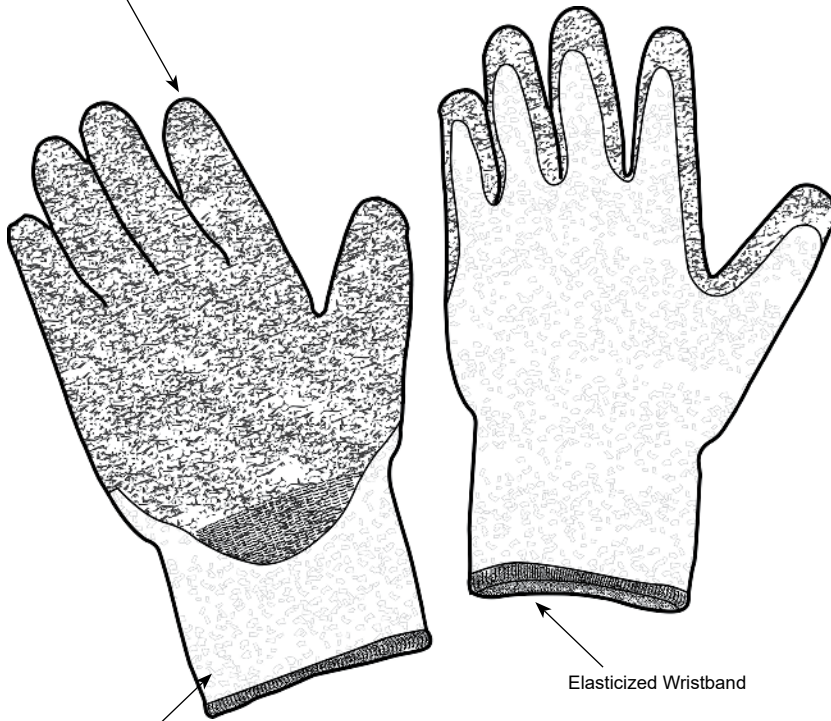

Seamless Fine Gauge Knit

Elasticized Wristband

Specifications:

Electrical Properties

Surface Resistivity:

Typical Values

< 1 x 10⁹ ohms

Test Procedures/Method

Surface Resistivity Meter

Physical Properties

Fabric:
Configuration:
Liner Color:
Coating Color:
Shelf Life:
Thickness on Coated Area

Ultra-high-molecular-weight polyethylene
Elastic Wrist
Grey
White
Functional: 1 year
1.0 mm (± 0.2)

Thickness Gage (Dial Type/
Digimic Type)

Other Properties

Abrasion Resistance (Revs)
Blade Cut Resistance
Tear Resistance (N)
Puncture Resistance

4 - Performance Level
5 - Performance Level
4 - Performance Level
2 - Performance Level

EN 388: 2003
EN 388: 2003
EN 388: 2003
EN 388: 2003

Item	Size	Length*	
17137	Small	8-1/4"	210 mm
17138	Small	8-5/8"	220 mm
17139	Medium	9"	230 mm
17140	Large	9-1/2"	240 mm
17141	X-Large	9-7/8"	250 mm
17142	XX-Large	10-1/4"	260 mm

Glove Laundering

For proper operation, the ESD Gloves must be laundered periodically. Woolite works well. Liquid detergents are better than dry in that there is less caking and frictional wear. Launder glove in cool or warm water, tumble dry with low heat or hang dry. Machine washing works well if using a standard house machine on gentle cycle. It is not recommended to launder these gloves in heavy industrial laundry machines as it will lead to premature wear. Gloves should be tumbled dry using low heat. DO NOT BLEACH. After laundering, verify < 1 x 10⁹ ohms.

Sold in Pairs

*Length is measured from the tip of the fingers to the bottom of the glove.
Tolerance: ±3/8"

Specifications and procedures subject to change without notice.

Country of Origin: Israel

ESD CUT RESISTANT GLOVES

DESCO

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
PHONE (909) 627-8178
DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
PHONE (781) 821-8370

DRAWING NUMBER
17137

DATE:
June
2021