

### CAMPUS AND IN-BUILDING DIRECTIONAL ANTENNAS

DirectLink™ is a series of wall and mast mount directional antennas that has been designed to meet the most demanding needs of the contemporary wireless environment. DirectLink's attractive, UV resistant housings and mounts allow the antennas to be mounted anywhere in the campus or in-building environment. The antennas offer very precise and controllable pattern characteristics in the 2300 - 2500 MHz frequency range.

All antennas in the series may be flush, wall or mast mounted and all are available with a variety of flush and articulating mounts. Standard models can be ordered with TNC, SMA, or N female connectors and an integrated coaxial pigtail. Other connector and pigtail combinations are available upon request.




#### FEATURES

- Indoor / outdoor
- Attractive styling
- Articulating

#### APPLICATIONS

- Campuses
- In-building environments
- WiMAX

PARAMETERS	SPECIFICATIONS
Power	75 Watts (25 Watts at 5 GHz)
Polarization	Linear
Standard wall mount Dimensions	5.70 x 3.81 x 1.50 in (14.48 x 9.68 x 3.80 cm) 5 oz (.14kg)
Articulating wall mount Dimensions	5.80 x 3.81 x 2.26 in (14.73 x 9.68 x 5.74 cm) 8 oz (.23 kg)
Connectors	SMA and TNC. Other connector types available on special request.
Mounting	Standard units for wall mounting. Mast mount bracket kits available. Custom mount configurations for volume users.
Cable	Low loss pigtail provided.

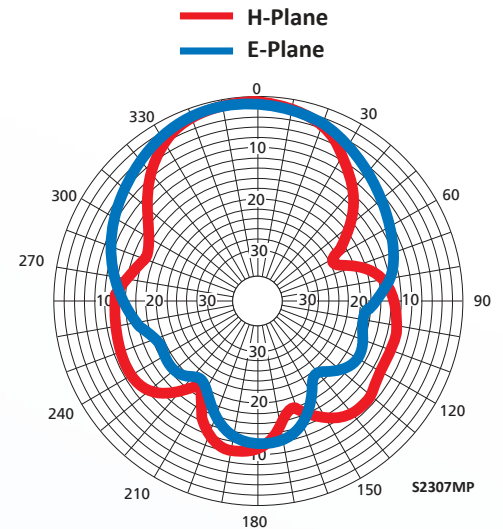

MODEL	FREQUENCY MHz	GAIN dBi	3 dB BWWIDTH		VSWR	F/B dB	CONNECTOR (FEMALE)	ARTICULATING VERSION
			E-PLANE	H-PLANE				
S2406MPC10NF*	2400-2500	6.5 dBic	65°	65°	1.5:1	20	N	Yes
S2307AMP10TNF	2300-2500	7.5	60°	65°	1.5:1	12	TNC	Yes
S2307MP10TNF	2300-2500	7.5	60°	65°	1.5:1	12	TNC	No
S2307AMP10SMF	2300-2500	7.5	60°	65°	1.5:1	12	SMA	Yes
S2307MP10SMF	2300-2500	7.5	60°	65°	1.5:1	12	SMA	No
S2307AMP10NF	2300-2500	7.5	60°	65°	1.5:1	12	N	Yes
S2307MP10NF	2300-2500	7.5	60°	65°	1.5:1	12	N	No

\*Right hand circular polarization

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941  
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127  
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective by reason of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.



#### ANT-DS-S2307MP 0715

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trade marks or registered trade marks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.