

NOTES:


- ① MAT'L: COPPER (STOCK TKN. $\frac{.040}{1.02}$)
- PLATING: ELECTRO-TIN (.0003 MIN.)
- ② INSULATION: MOLDED PVC (YELLOW)

STUD SIZES: ($\pm .005$)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING #E32244
 "CSA" LISTING #18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

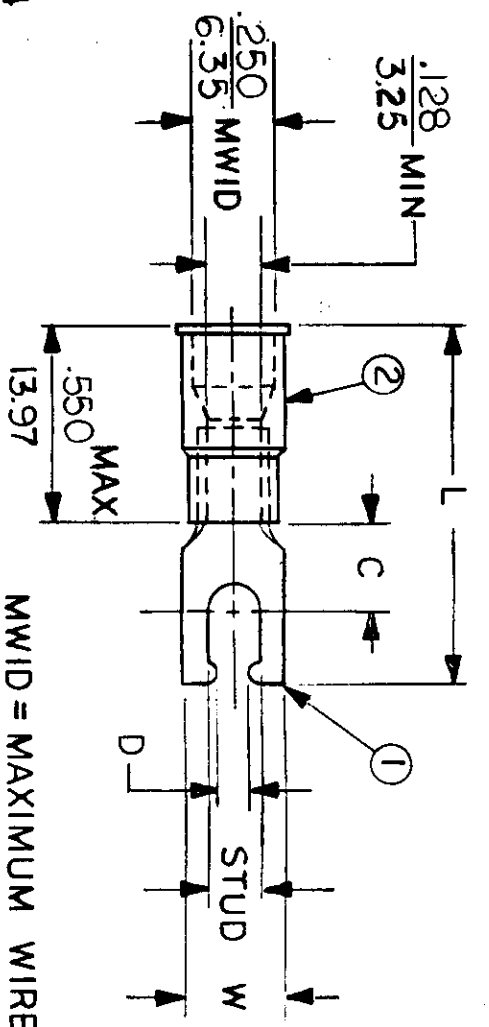

MWID = MAXIMUM WIRE INSULATION DIAMETER
 WIRE SIZE: 12-10 AWG
 4.0-6.0MM²

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"D" ±.005	AVAILABLE STUD SIZES	DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	NTS	DATE	TITLE:	DWG. NO.	CUSTOMER
						DEC.	ANG.							
C-2196-	$\frac{.290}{7.37}$	$\frac{.305}{7.75}$	$\frac{1.097}{27.86}$	$\frac{.111}{2.82}$	06X						11-1-84	SNAP SPADE TONGUE TERMINAL INSULKRIMP 200-SERIES	A	
C-2197-	$\frac{.320}{8.13}$	$\frac{.305}{7.75}$	$\frac{1.125}{28.58}$	$\frac{.137}{3.48}$	08X						11-26-84			
C-2198-	$\frac{.320}{8.13}$	$\frac{.305}{7.75}$	$\frac{1.145}{29.08}$	$\frac{.163}{4.14}$	10X									
C-2199-	$\frac{.415}{10.54}$	$\frac{.375}{9.53}$	$\frac{1.271}{32.28}$	$\frac{.223}{5.66}$	14X									

