

Contents

Item	Description	Page
1.	Antenna Specification	3
2.	Mechanical Specification	4
3.	Test Report	5~10



Antenna Specification

■ ELECTRICAL PROPERTIES

- 1.1 Frequency Range.....2.4GHz ~2.5GHz
- 1.2 Impedance.....50 Ohm Nominal
- 1.3 VSWR.....2 (Max)
- 1.4 Return Loss.....-10dB (Max)
- 1.5 Radiation.....Omni-directional
- 1.6 Gain(peak).....2.21dBi
- 1.7 Polarization.....Linear Vertical
- 1.8 Admitted Power.....1W

■ PHYSICAL PROPERTIES

- 2.1 Cable.....Coaxial Cable § 1.13 Black
- 2.2 Antenna Material.....FR4(黑漆噴錫板)
- 2.3 Operating Temp.....-25°C ~ +75°C
- 2.4 Storage Temp.....-30°C ~ +75°C
- 2.5 Connector.....IPEX 4 Compatible



Mechanical Specification

RoHS COMPLIANT

MECHANICAL

Body :FR4(黑色噴錫板)


Double Tape:3M 467

ELECTRICAL

Frequency : 2.4GHz

Cable : Coaxial Cable ϕ 1.13(Black)

Connector:IPEX 4 Compatible

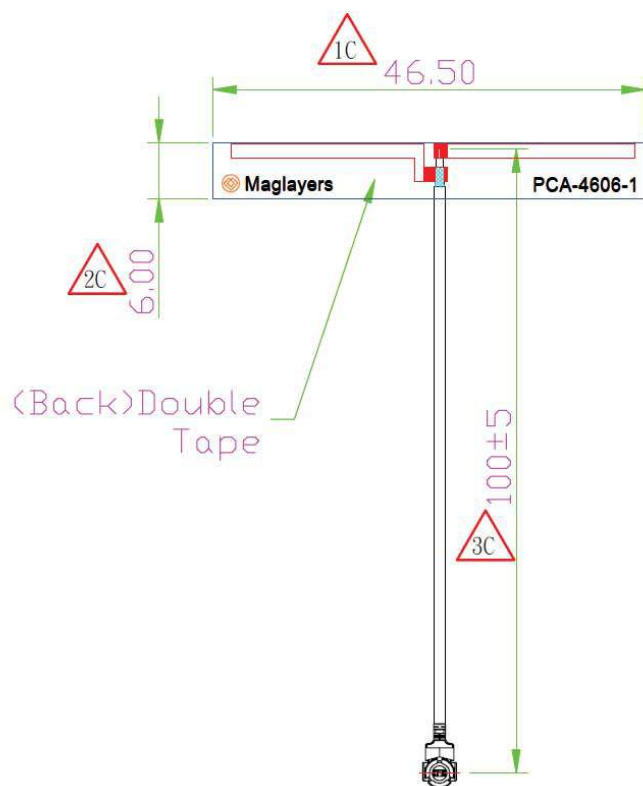


需注意端子方向

△	New Release	03/11/13	HWCHAN
LTR	DESCRIPTION	DATE	REQ. BY
設計 DR.	核准 APPD.		
HWCHAN	Marco	2013/03/11	2013/03/11
版本說明		REVISION NOTE	
MAGLAYERS			

※凡標記△/C記號者,為品管檢驗之尺寸

容許公差	TOLERANCE
.XXX	±0.20
.XX	±0.35
.X	±0.50
X	±1.00
ANG	±5

品名
ARTICLE
PCA-4606-2G4C1-A33



單位 UNIT	比例 SCALE	張數 SHEET	版本 REV.
mm	****	1	A




Test Report

ELECTRICAL CHARACTERISTICS

P/NO: PCA-4606-2G4C1-A33


Spec: 2.4GHz ~ 2.5GHz

S11

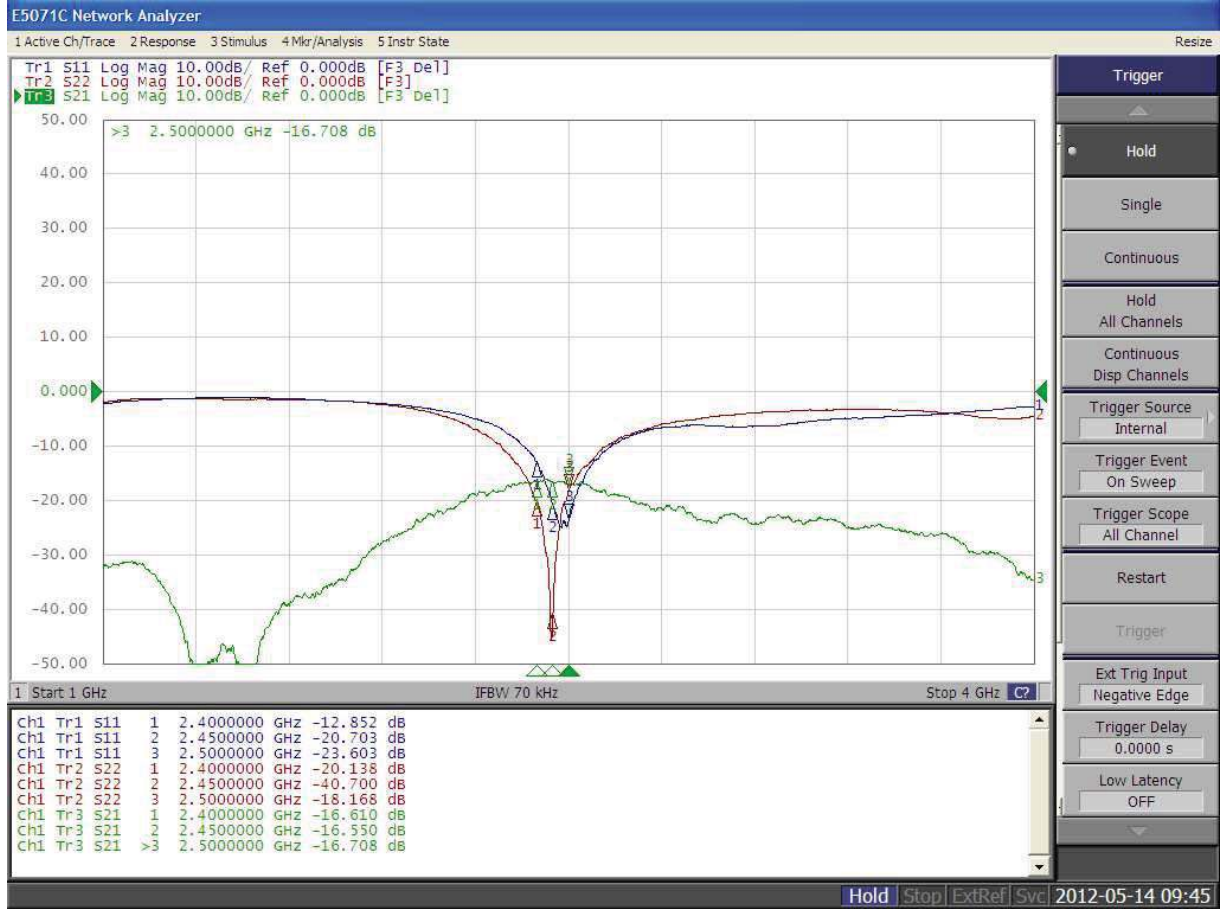


MAG.LAYERS

■ Experimental Setup

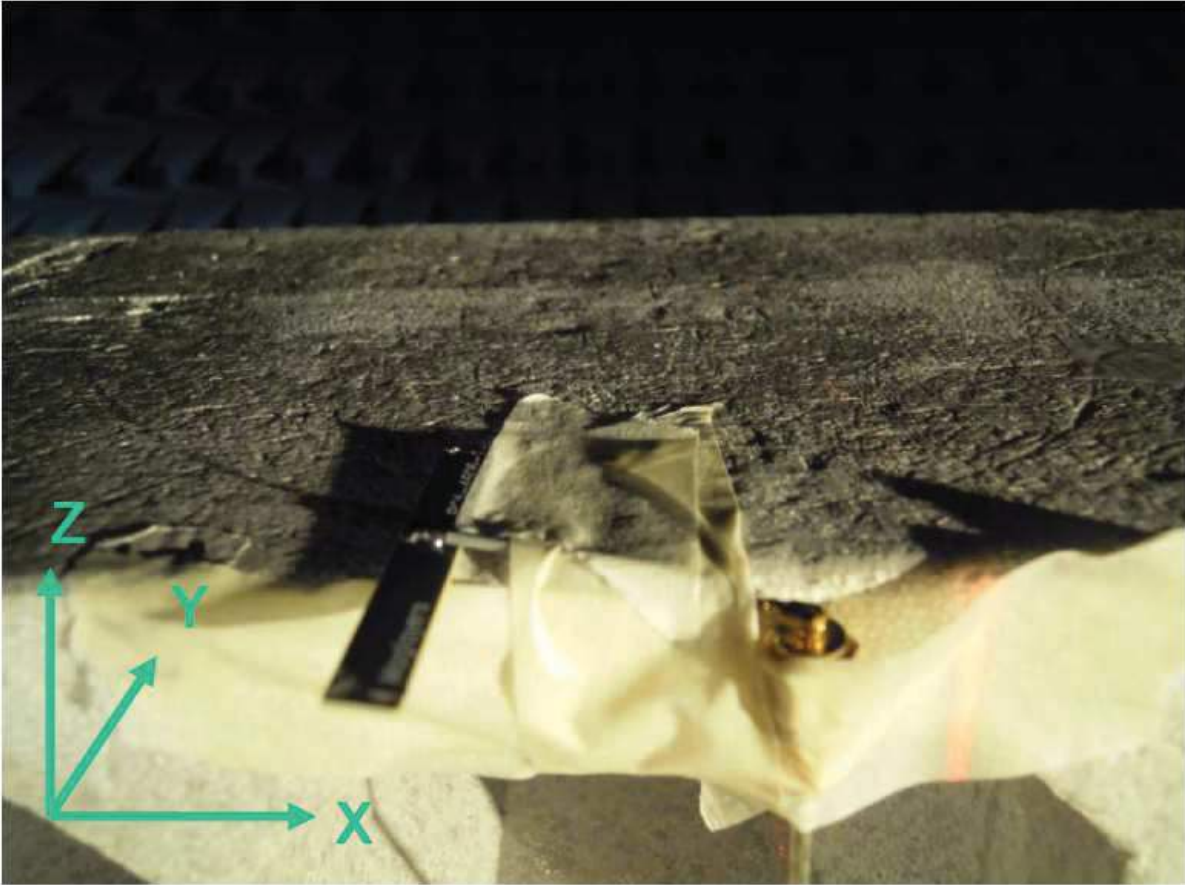


Frequency(MHz) : 2400~2500. Pattern Field : X-Z plane
Gain . dB

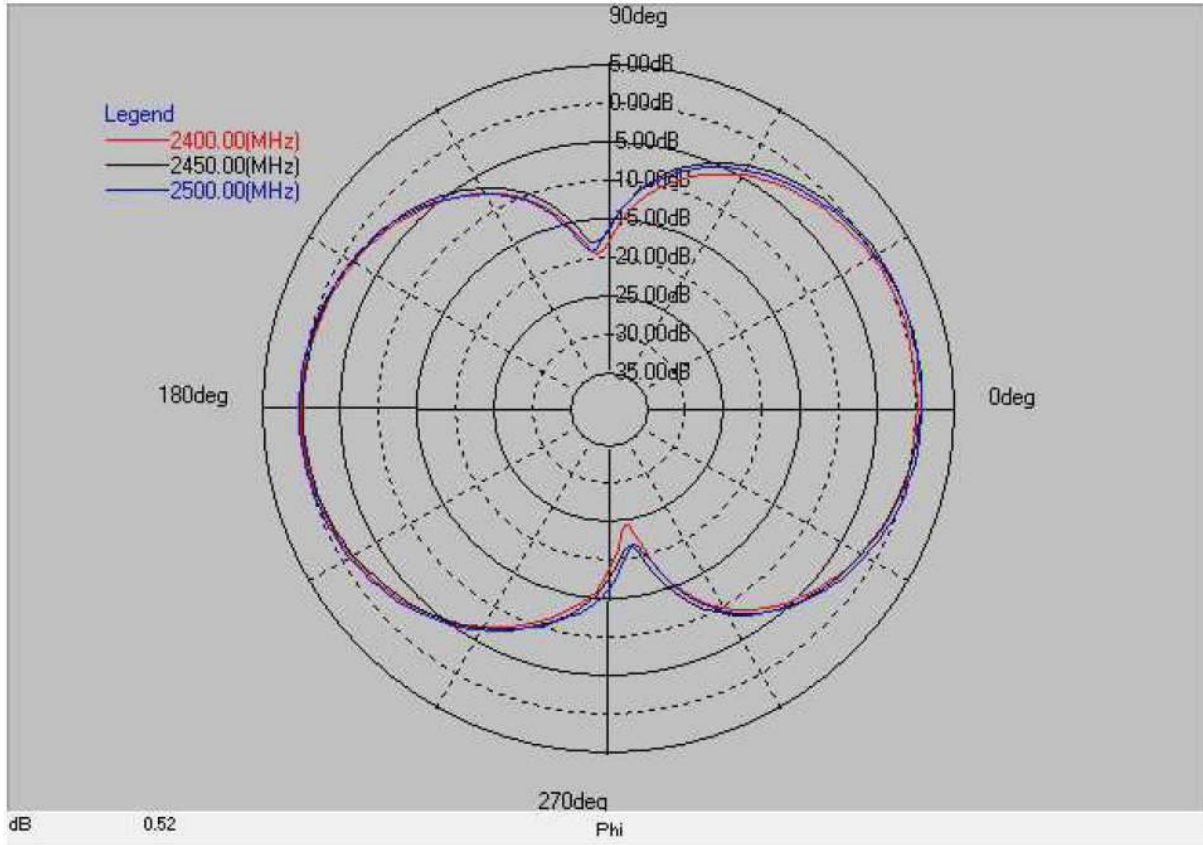


Layer	Max value	Min value	Average
2400(MHz)	0.26 dB	-24.63 dB	-3.13 dB
2450(MHz)	0.97 dB	-21.94 dB	-2.80 dB
2500(MHz)	0.81 dB	-22.13 dB	-2.68 dB

Frequency(MHz) : 2400~2500. Pattern Field : Y-Z plane
Gain . dB

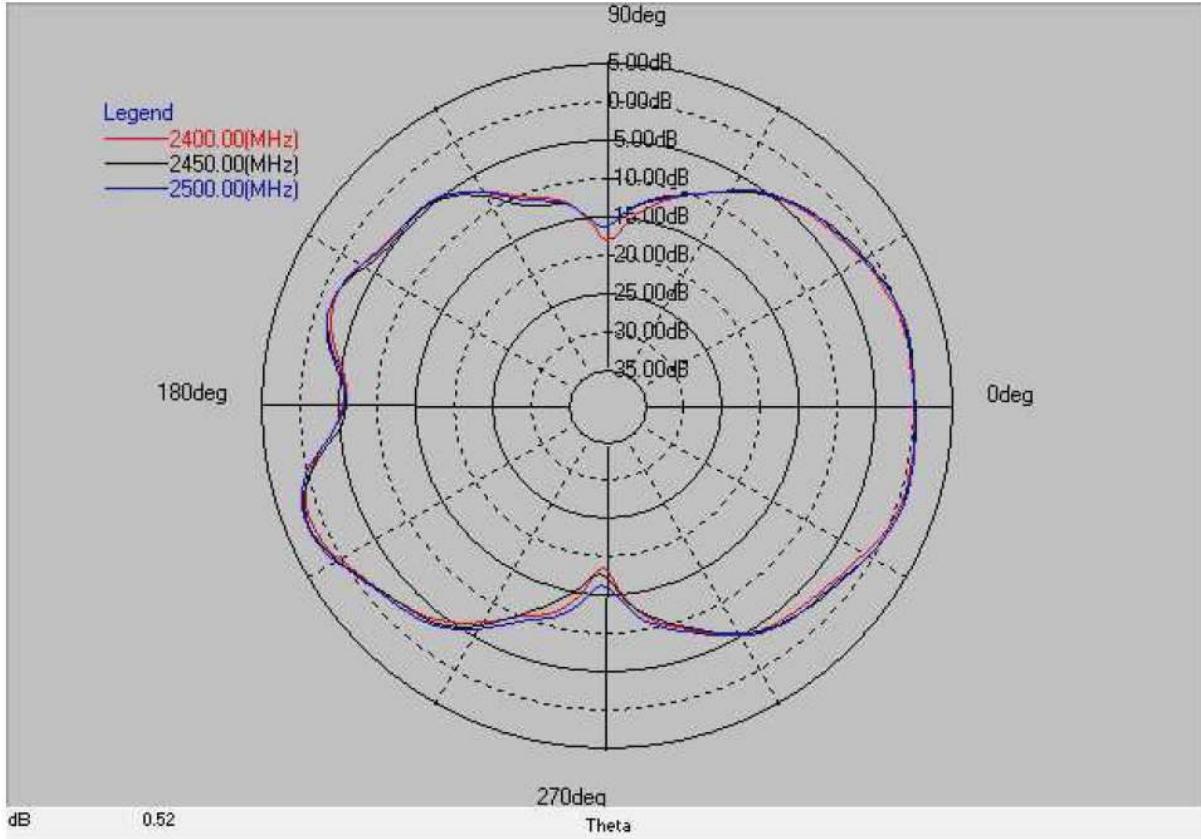


Layer	Max value	Min value	Average
2400(MHz)	1.48 dB	-18.90 dB	-3.41 dB
2450(MHz)	1.99 dB	-18.04 dB	-3.20 dB
2500(MHz)	2.21 dB	-16.54 dB	-3.06 dB

Frequency(MHz) : 2400~2500. Pattern Field : X-Y plane
Gain . dB

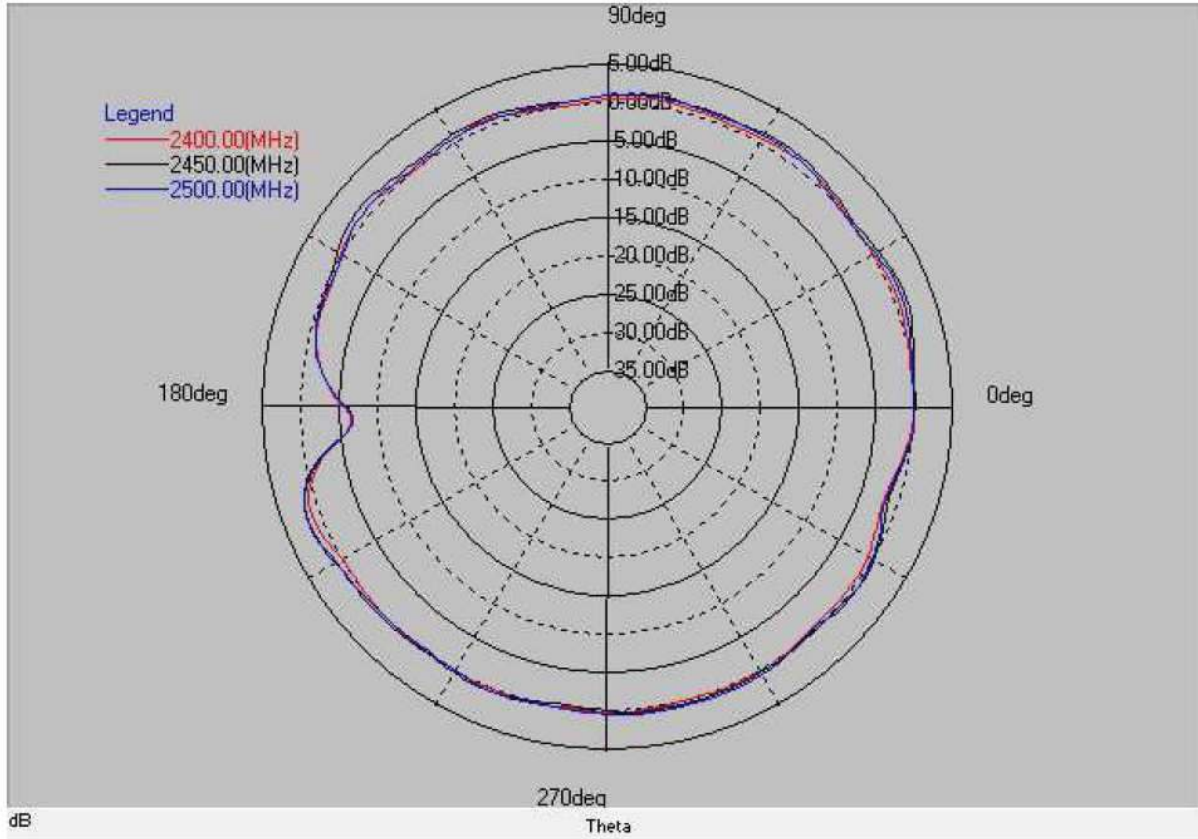

Layer	Max value	Min value	Average
2400(MHz)	1.12 dB	-6.49 dB	-0.15 dB
2450(MHz)	1.93 dB	-6.78 dB	0.32 dB
2500(MHz)	1.84 dB	-6.65 dB	0.14 dB

Antenna efficiency

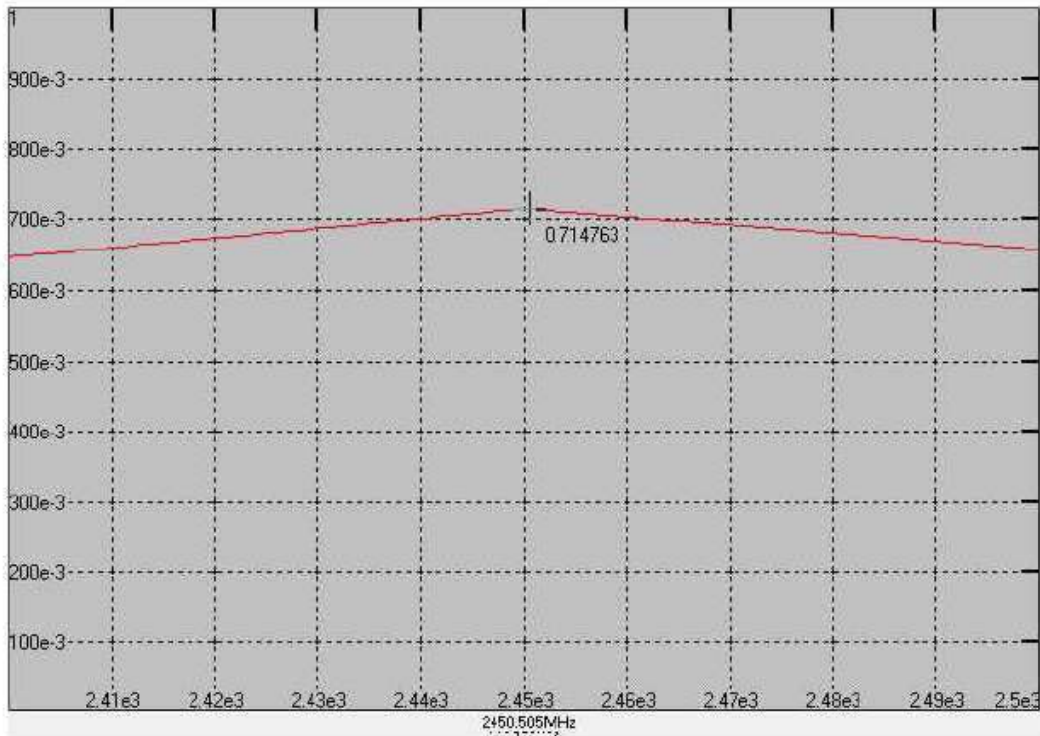

Maximum Efficiency At 2.4-2.5 GHz : 71.47%