



# PRODUCT SPECIFICATION

Attn: \_\_\_\_\_

SPEC. No: \_\_\_\_\_

DATE: Dec.17.2012

CUSTOMER PRODUCT NAME:
TDK PRODUCT NAME: <b>WT-505060-10K2-A11-G</b>
APPROVED BY:
CUSTOMER COMMENT:
<b>REMARK:</b> Please sign back specification after customer conformation until 2weeks. If customer can't sign back specification, customer should be approved TDK specification.

## TDK-EPC Corporation

### Head Office Address:

1-13-1, Nihonbashi, Chuo-ku, Tokyo  
103-0027 , Japan

### SALES

MANAGER	SALES

### ENGINEERING

APPROVED	CHECKED	ISSUED

Sales Office \_\_\_\_\_

Sales Tel. \_\_\_\_\_

PRODUCT	
---------	--

# REVISED HISTORY

CUSTOMER PRODUCT NAME: \_\_\_\_\_

TDK PRODUCT NAME: **WT-505060-10K2-A11-G** \_\_\_\_\_

NO.	REV.	REVISED CONTENT	REVISED REASON	DATE
1	0	To establish specification		2012.12.17

# PRODUCT SPECIFICATION

TDK PRODUCT NAME:




**WT-505060-10K2-A11-G**

SPEC. NO.

CUSTOMER PRODUCT NAME:

(1) Appearance & Dimensions (Unit: mm)

Weight: 11.4 g (Typ.)

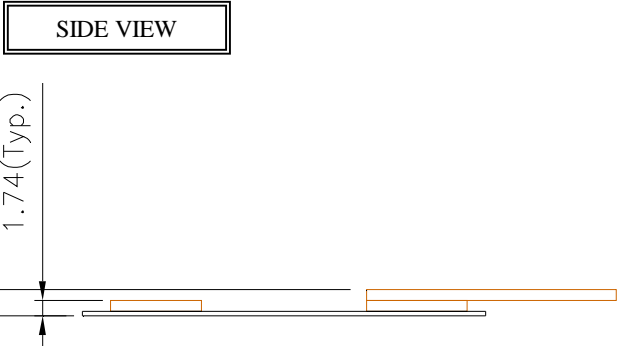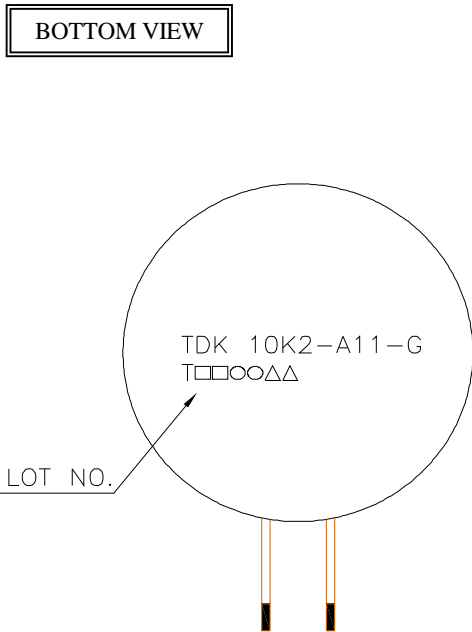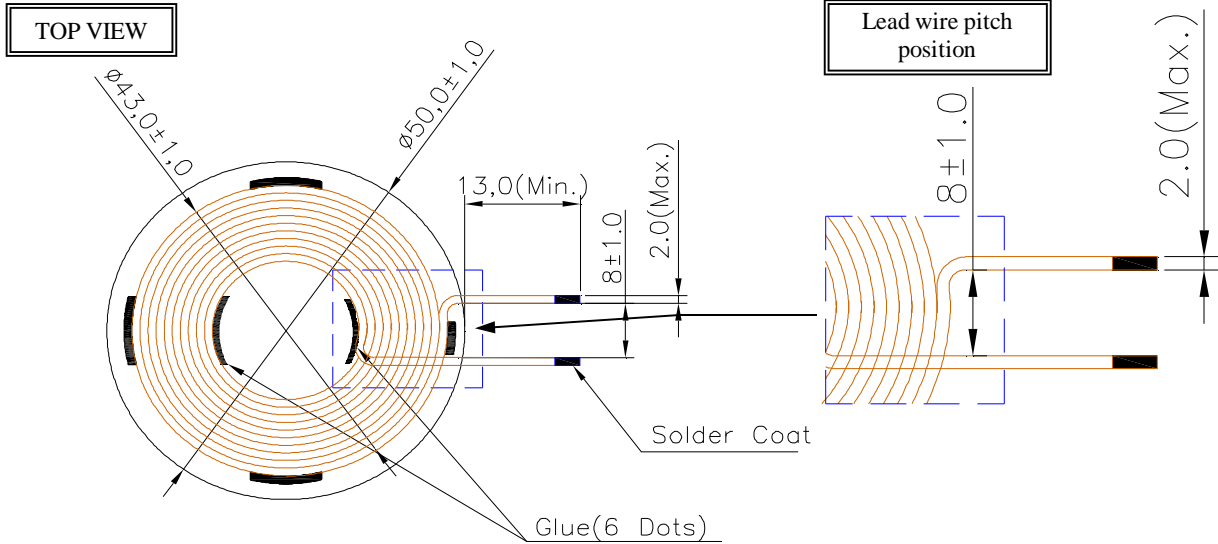

[ Remarks ]

1. Lead wire pitch is end of wire position, not output terminal.
2. Marking Content:
  - a. T: Manufacturing Centers
  - b. Lot No.: □□ ○○ △△
    - (1) (2) (3)
    - (1) Year: A.D. end number in double
    - (2) Month: Jan.(1), Feb.(02)...Dec.(12)
    - (3) Day: 01,02,03,...31.

## PRODUCT SPECIFICATION

TDK PRODUCT NAME: <b>WT-505060-10K2-A11-G</b>	SPEC. NO.	CUSTOMER PRODUCT NAME:
--	-----------	------------------------

### (2) Air coil specification

Wire Diameter:  $\phi 0.08\text{mm} \times 105$  ( Type2 Wire)

Coil Turns: 10TS ,1 layer

### (3) Electrical Characteristics

No.	Parameter	Specification	Test Instrument
1	Inductance	$6.3 \mu\text{H} \pm 10\%$	HP 4284A DIGITAL LCR METER or EQUIVALENT (@100kHz 1.0 Vrms)
2	Q Value	70 (Min.)	HP 4284A DIGITAL LCR METER or EQUIVALENT (@100kHz 1.0 Vrms)
3	DC Resistance	$0.06 \Omega$ (Max.) (At $25^\circ\text{C}$ )	CHEN HWA 502A OHM METER or EQUIVALENT

### (4) Temperature Characteristics

No.	Parameter	Specification
1	Operating Temperature	$-30 \sim 70^\circ\text{C}$
2	Storage Temperature	$-40 \sim 85^\circ\text{C}$

### (5) Application



1. The product fit in with RoHS rule.
2. The product fit in with Halogen-Free.
3. Reflow and dip-flow soldering can not used for this product.

# PRODUCT SPECIFICATION

TDK PRODUCT NAME: <b>WT-505060-10K2-A11-G</b>	SPEC. NO.	CUSTOMER PRODUCT NAME:
--	-----------	------------------------

## (6) Reliability Conditions

No.	Parameter	Conditions
1	Low Temperature (Storage)	(1) Temperature : $-40\pm 2^{\circ}\text{C}$ (2) Time : 240Hrs
2	High Temperature (Storage)	(1) Temperature : $+85\pm 2^{\circ}\text{C}$ (2) Time : 240Hrs
3	Thermal Shock	(1) Temperature : $-40\pm 5^{\circ}\text{C} / 30\text{min} \sim +85\pm 5^{\circ}\text{C} / 30\text{min}$ (2) Ambient Time : 5min (3) Times : 100cycles
4	Vibration	Unpacked: (1) frequency: 10~500Hz sweep 1 octave wave / 1 min (2) Amplitude: 1.5mm (p-p) or 10G (3) Direction: X.Y.Z. direction (4) Time: X.Y.Z for 2 hours each.
5	Temperature / Humidity (Storage)	(1) Temperature : $+60\pm 2^{\circ}\text{C}$ (2) Humidity: 90% RH. (3) Time: 240Hrs
6	Temperature / Humidity (OP)	(1) Temperature : $+60\pm 2^{\circ}\text{C}$ (2) Humidity: 90% RH. (3) Time: 240Hrs (4) Current: DC 1.0A (5) Frequency: 100kHz
7	Package Drop	(1) Drop the sample package in a carton box. (2) Height : 100 cm (3) Direction : 1corner, 3 edges, 6 faces (4) Drop time : 16 times
8	ESD(HBM)	(1) Test Voltage: 1000V (2) Ambient: $25\pm 5^{\circ}\text{C}$ (3) Time: Negative / Positive each 1 time (4) Resistance: 1500 $\Omega$ (5) Capacitance: 100pF
9	ESD(MM)	(1) Test Voltage: 100V (2) Ambient: $25\pm 5^{\circ}\text{C}$ (3) Time: Negative / Positive each 1 time (4) Capacitance: 200pF

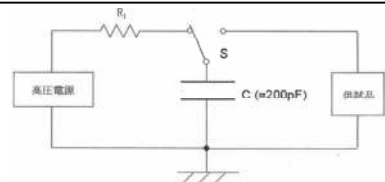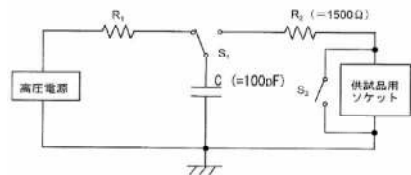

# PRODUCT SPECIFICATION


TDK PRODUCT NAME:

**WT-505060-10K2-A11-G**

SPEC. NO.

CUSTOMER PRODUCT NAME:

## (7) Construction

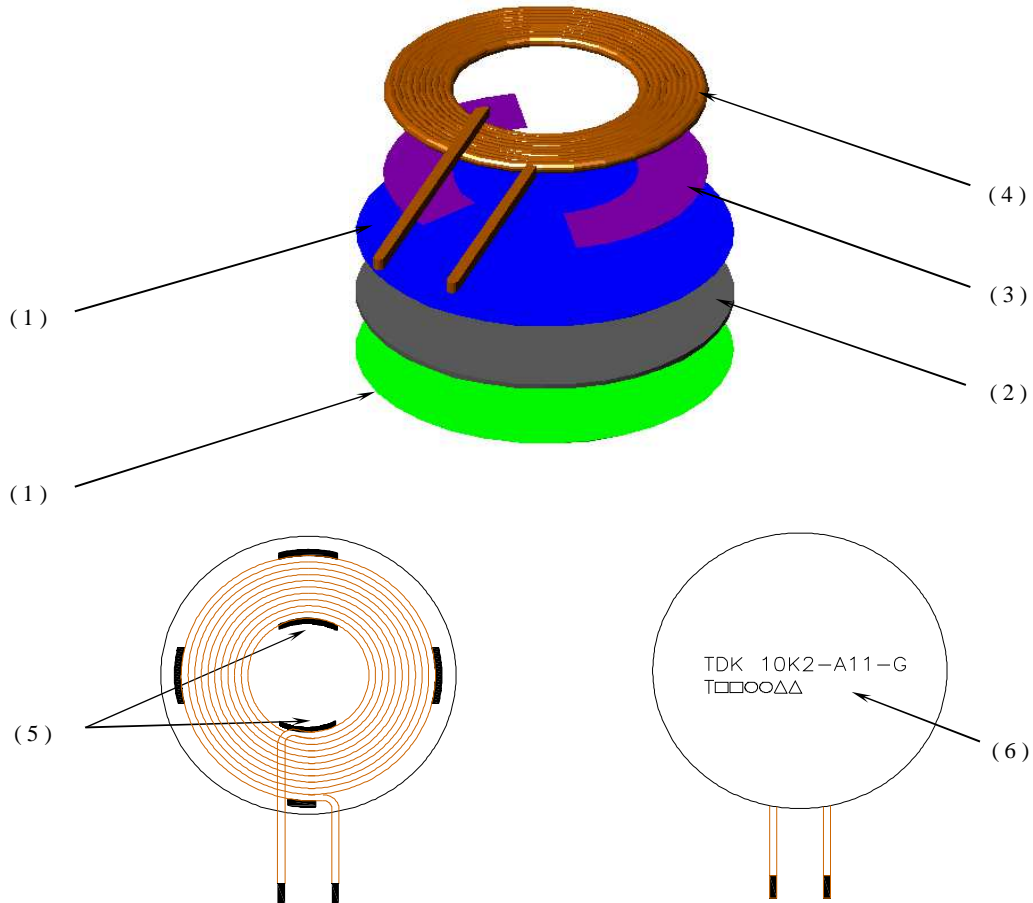

## (8) Material List

No.	Material Name
1	PET Tape
2	Ferrite Sheet
3	Adhesive Tape
4	Air Coil
5	Glue
6	Ink


# PRODUCT SPECIFICATION

TDK PRODUCT NAME: <b>WT-505060-10K2-A11-G</b>	SPEC. NO.	CUSTOMER PRODUCT NAME:
--	-----------	------------------------


## (9) Packing

1. To stack the the Trays onto 4 Layers:

- PET tray dimension: 326\*329\*11.0mm (REF.)
- 12 Pcs / per PET tray

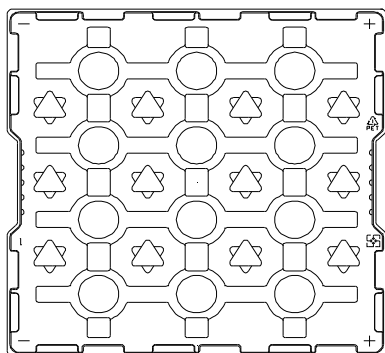


Total : 4x3=12pcs

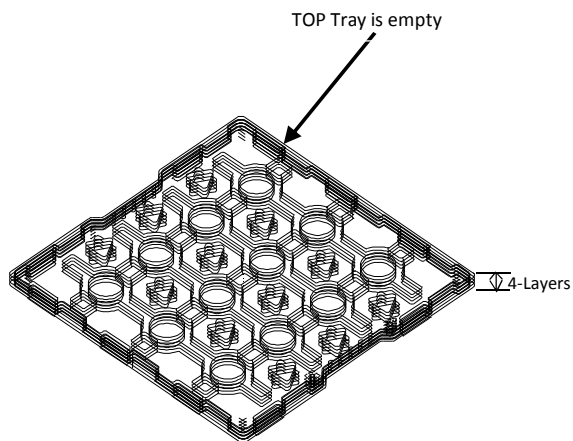

Total : 12x3=36pcs

2. To put 2 Trays of products into the small Carton and affixing the out-going label on the outside .

- Small carton dimension: 331\*337\*33mm (REF.)
- 4 PET Trays / per small carton ( PET tray of the top side is empty in the small carton)

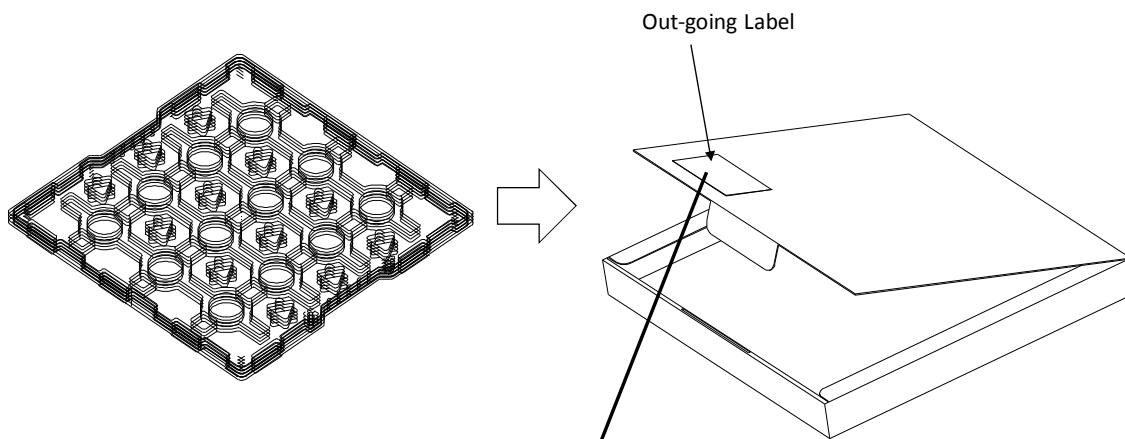

Out-going Label

# PRODUCT SPECIFICATION

TDK PRODUCT NAME:


**WT-505060-10K2-A11-G**

SPEC. NO.


CUSTOMER PRODUCT NAME:

3. To put 3 small carton into the Carton .

- Outer carton dimension: 347\*340\*124mm (REF.)
- 3 small cartons / per outer carton
- Total quantity : 108 Pcs

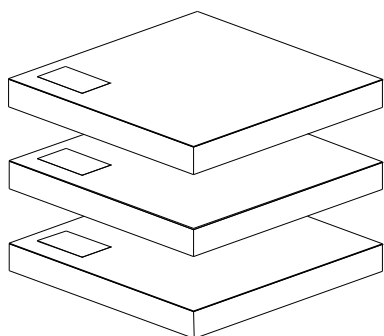


3 small cartons

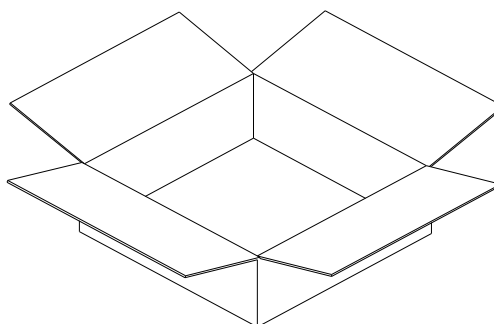

Outer carton

4. Packing.

- To pack the carton by scotch tape and affix out-going label (outside) on it outside.
- The Inspection data in the box , there would be a signet mark on it outside.

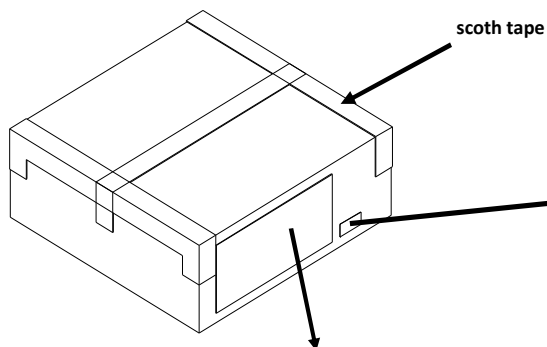

INSPECTION DATA  
ENCLOSED  
檢驗紀錄表在內

signet mark of Inspection data

(3S) TTW=WL11K0600200101400000360 		CUSTOMER: Customer	
(6S) C/NO:1		BOX COUNT	CUST. PART NO(P): 12A34567-89A
		001/009	
SHIPPING MARK		ROHS	TDK ITEM CODE(6P): TTXDF12345TWN
<b>SAMPLE</b>		P/O NO.(K): TTTT-S123456789	
		LOT NO.(IT): WL12345678	DATE: Nov.22.2011
		QTY(Q): 288	
Customer		TDK ITEM (IP): WT-505060-10K2-A11-G	
Location			
MADE IN TAIWAN		(WT-505060-10K2-A11-G)	
WL12K34567		SUB P/O NO.(6K): 4500059424	
12345A6789			
		TDK SPEC.	
C/NO:1	WAREHOUSE	(CT)	9
	NW 3.6	GW 4.0	TTXDF10105

out-going label (outside)