| REV. | DATE | DESCRIPTION |
|---|---|---|
| A | 06/05/03 | UPDATE DRAWING FORMAT |

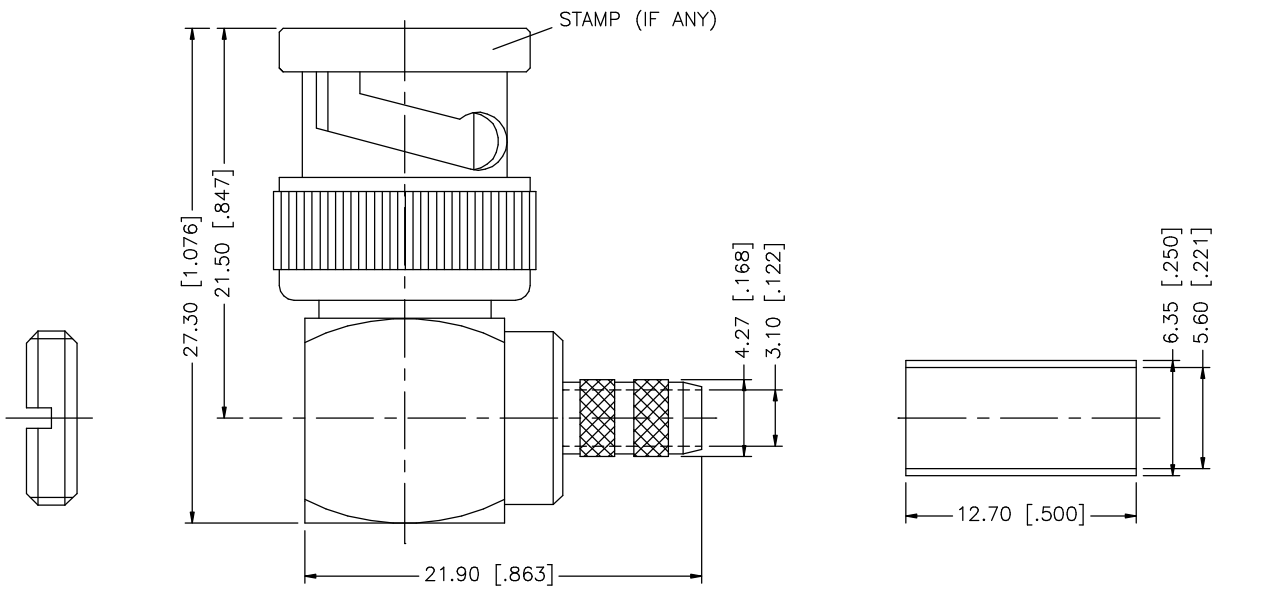


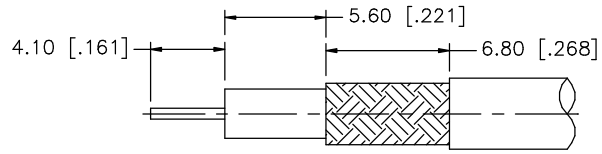


RECOMMENDED
CABLE STRIPPING DIM'S

| | DESCRIPTION | MATERIAL | FINISH | QTY |
|---|---|---|---|---|
| 8 | | | | |
| 7 | | | | |
| 6 | | | | |
| 5 | NUT | BRASS | NICKEL | 1 |
| 4 | FERRULE | COPPER | NICKEL | 1 |
| 3 | CONTACT PIN | BRASS | GOLD | 1 |
| 2 | INSULATOR | DELRIN | NATURAL | 1 |
| 1 | SHELL/BODY | BRASS | NICKEL | 1 |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

| APPROVALS | DATE |
|---|---|
| DRAWN G.R.S. | 06/05/03 |
| CHECKED | |
| ISSUED | |
| SHEET 1 OF 1 | |
| | |

CAD FILE C:/112/112526.DWG

Amphenol Connex

PART DESCRIPTION
BNC R/A CRIMP PLUG
(FOR RG-223/U, 55/U, 142A/U, 400/U)

PART NO. 112526

| DWG. NO. | REV. | SIZE | SCALE |
|---|---|---|---|
| 112526.DWG | A | A | NA |