THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY -
ALL RIGHTS RESERVED.

KEYING OPTIONS (2:1)



KEYING OPTION A



KEYING OPTION B



KEYING OPTION C



KEYING OPTION D



KEYING OPTION E



KEYING OPTION F



KEYING OPTION G



KEYING OPTION H

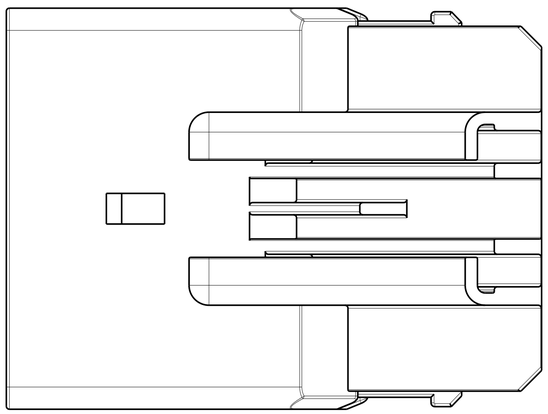

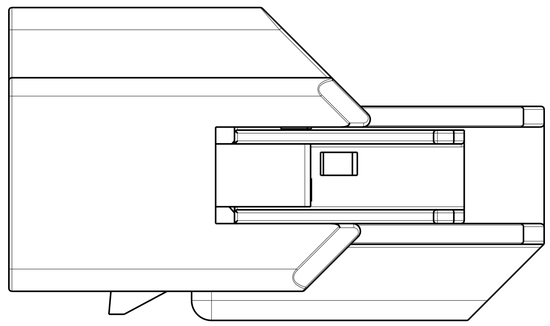

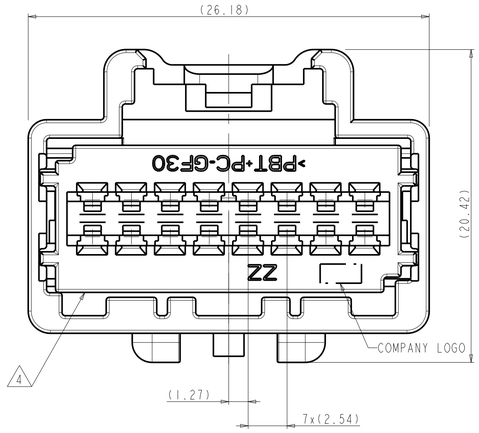

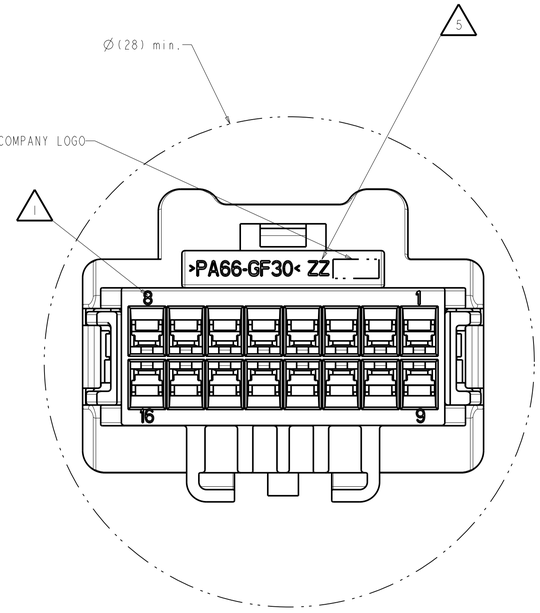

WORST CASE FEED CODITION

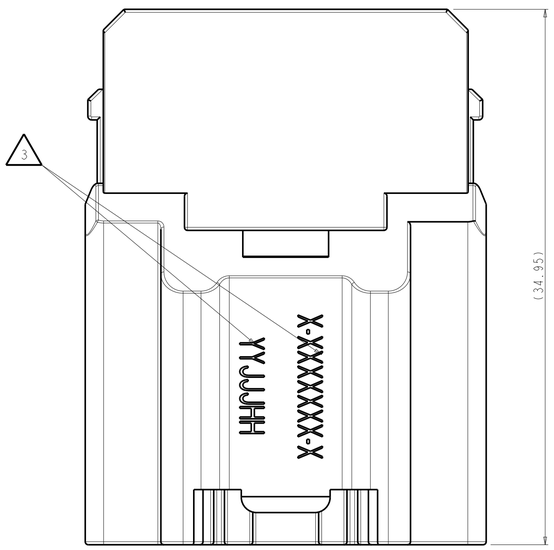

SHOWING MATING COMPONENTS
(FOR REFERENCE ONLY)

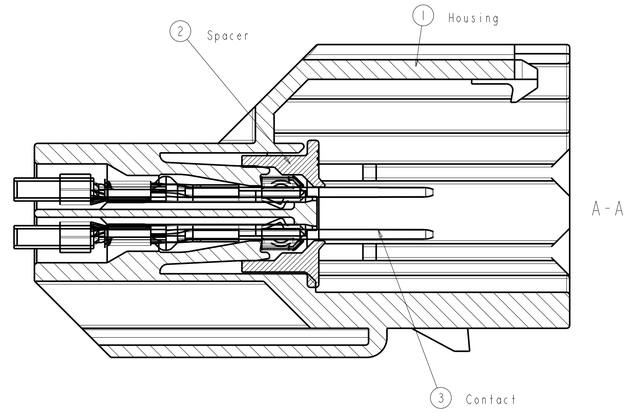

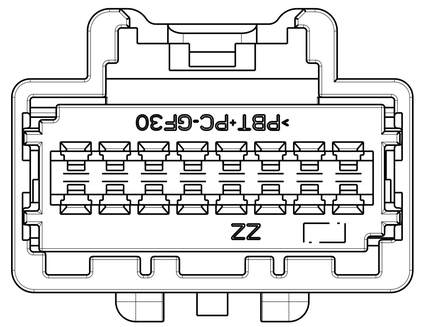

CODING F SHOWN



2:1

KEYING OPTIONS												
A	A	B	C	D	E	F	G	H	TYCO ASSEMBLY NUMBER			
6-1419167-1	1411367-1	6-1419167-2	5-1419167-5	5-1419167-6	5-1419167-7	5-1419167-8	5-1419167-9	6-1419167-0				
1	1	1	1	1	1	1	1	1	2	SPACER	PBT+PC-GF30	RED
								1	1	MALE HOUSING KEY H	PA66-GF35	BLACK
							1		1	MALE HOUSING KEY G	-	BLACK
						1			1	MALE HOUSING KEY F	-	BLACK
					1				1	MALE HOUSING KEY E	-	BLACK
				1					1	MALE HOUSING KEY D	-	BLACK
			1						1	MALE HOUSING KEY C	-	BLACK
		1							1	MALE HOUSING KEY B	-	BLACK
	1								1	MALE HOUSING KEY A	-	LIGHT GREY
1									1	MALE HOUSING KEY A	-	BLACK
KEYING OPTIONS									ITEM	DESCRIPTION	MATERIAL	COLOUR

1. TERMINAL POSITION NUMBERS
2. SPACER SHIP IN PRE ASSEMBLED POSITION
3. PART NUMBER AND DATE CODE
4. TPA CAN BE SHIPPED IN THIS POSITION OR ROTATED 180°.
5. CAVITY NUMBER
6. PACKING: CONNECTOR ASSEMBLIES BULK PACKED IN CARDBOARD BOX

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REV PER ECR-10-012906	24JUN2010	VSS	DZ
	D2	REVISED PER ECO-14-008755	11JUN2014	DD	RL

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.1
1 PLC ± 0.1
2 PLC ± 0.1
3 PLC ± 0.1
4 PLC ± 0.1
ANGLES ±-

MATERIAL -
FINISH -

DWN K STUBBE 20JUN2002
CHK G STEINBACH 20JUN2002
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME 2X8 POSITION, GET MALE CONNECTOR UNSEALED; ASSEMBLY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-5-1419167-5	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV D2