2299503-1 - ACTIVE

TE Internal #: CR2103-000 Splices, Closed End Splice, 22 – 14 AWG Wire Size, Splice Capacity 3 + Ground, Standard, .195 in [.5 mm] Barrel Inside Diameter, Steel, Orange, Bag

View on TE.com >



Terminals & Splices > Splices



Wire Size: 22 – 14 AWG

Sealable: No

Splice Capacity: 3 + Ground

Splice Features: Standard

Barrel Inside Diameter: .5 mm [.195 in]

Features

Product Type Features

Splice Accessory Type	Wire Cap
Sealable	No
Splice Type	Closed End Splice

Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Splice Capacity	3 + Ground
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Operating Voltage	600 VAC
Body Features	
Splice Features	Standard
Primary Product Color	Orange
Contact Features	
Contact Base Material	Steel
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	Without

2299503-1

Splices, Closed End Splice, 22 – 14 AWG Wire Size, Splice Capacity 3 + Ground, Standard, .195 in [.5 mm] Barrel Inside Diameter, Steel, Orange, Bag



Dimensions

Wire Size	22 – 14 AWG
Barrel Inside Diameter	.5 mm[.195 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	105 °C
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Method	Bag
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

2299503-1

Splices, Closed End Splice, 22 – 14 AWG Wire Size, Splice Capacity 3 + Ground, Standard, .195 in [.5 mm] Barrel Inside Diameter, Steel, Orange, Bag



Compatible Parts





TE Part # 2388553-5 PUSH-IN CONNECTOR, 5 POS


Customers Also Bought



2299503-1

Splices, Closed End Splice, 22 – 14 AWG Wire Size, Splice Capacity 3 + Ground, Standard, .195 in [.5 mm] Barrel Inside Diameter, Steel, Orange, Bag



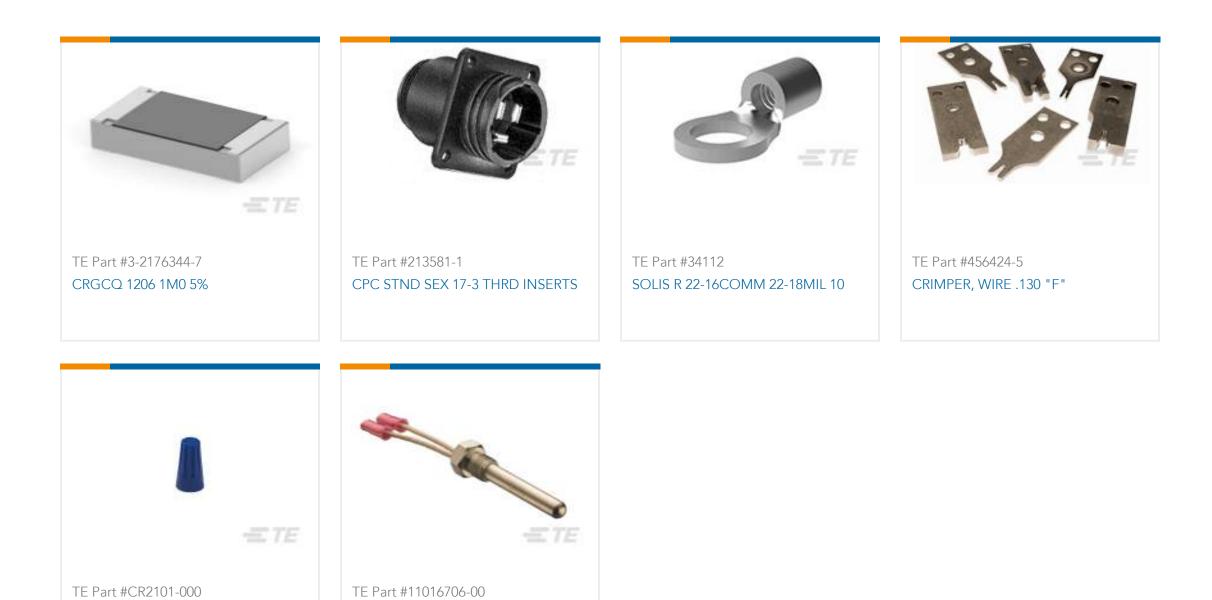

PRO2-G3.3M8D4 (8K+/- 5%)

Documents

Product Drawings CPGI-WC-WG-OR-BULK

WINGGRIP WC, BLUE, 22-14 AWG

English

Datasheets & Catalog Pages Twist Splice Wire Connectors flyer

English

Twist Splice wire connectors