

New

## GDAU-004

Push-pull Gate-Drive Transformer 1:1:1.3:1.3 2x11V<sub>us</sub>

INDUCTIVE COMPONENTS / GATE-DRIVE TRANSFORMER



### APPLICATIONS

- › Automotive BMS in onboard battery chargers

### 01 FEATURES


- › Pulse transformer for battery management system
- › Reinforced insulation at 3kV in pollution degree 2
- › Creepage distance > 8mm
- › ETmax product of 11V<sub>us</sub> across each half primary
- › Maximum current 150mA
- › Wide operating temperature range -40 to +125°C
- › UL94 and RoHS materials
- › AEC-Q200 qualified
- › Weight : approx 2grams
- › Tape&Reel packaging 13" W24mm

### 02 OPERATION


- › Pulse transformer with high insulation level
- › Push-pull mode

### 03 SPECIFICATIONS


#### DIMENSIONS

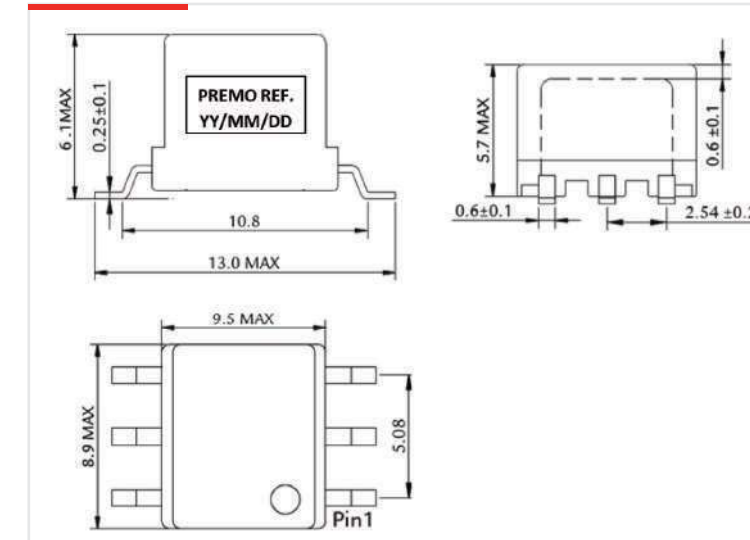

#### ELECTRICAL DIAGRAM



#### RECOMMENDED PAD-LAYOUT



#### ELECTRICAL SPECIFICATIONS

##### INDUCTANCE at 25°C

$L_{1-3}$ (100kHz/10mVac)	430 $\mu$ H $\pm$ 25%
$L_{4-6}$ (100kHz/10mVac)	713 $\mu$ H $\pm$ 25%

##### TURN-RATIO

$N_{1-2} : N_{2-3} : N_{6-5} : N_{5-4}$	1:1:1.29:1.29
---	---------------

##### DC RESISTANCE at 25°C

$DCR_{1-3}$	0.38 $\Omega$ MAX
$DCR_{4-6}$	0.38 $\Omega$ MAX

##### INSULATION RESISTANCE

RINS Prim/Sec (500Vdc)	> 1G $\Omega$
------------------------	---------------

##### DIELECTRIC STRENGTH

DWI Prim/Sec	3kVac (50Hz/1mA/1min)
--------------	-----------------------

##### DIELECTRIC STRENGTH

Between Windings	500Vac (50Hz/3mA/1min)
------------------	------------------------