
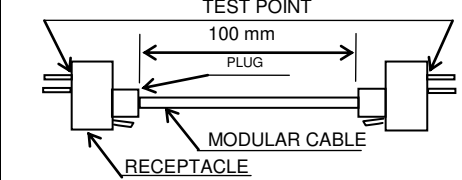


Aug. 1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

APPLICABLE STANDARD				
RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C $\triangle 1$	STORAGE TEMPERATURE RANGE	-25 °C TO 60 °C $\triangle 1$
	VOLTAGE	AC 125 V	CURRENT	0.5 A
SPECIFICATIONS				
ITEM	TEST METHOD	REQUIREMENTS	QT	AT
CONSTRUCTION				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	<input type="radio"/>	<input type="radio"/>
MARKING	CONFIRMED VISUALLY.		<input type="radio"/>	<input type="radio"/>
ELECTRIC CHARACTERISTICS				
CONTACT RESISTANCE	100 mA DC (OR 1000 Hz AC). MEASUREMENT POINTS SHALL BE AS FOLLOWS.  (ONE EXAMPLE CONNECTOR CONFIGURATION IS SHOWN.)	230 mΩ MAX.	<input type="radio"/>	<input type="radio"/>
INSULATION RESISTANCE	100 V DC.	100 MΩ MIN.	<input type="radio"/>	<input type="radio"/>
VOLTAGE PROOF	500 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	<input type="radio"/>	<input type="radio"/>
MECHANICAL CHARACTERISTICS				
MECHANICAL OPERATION	200 TIMES INSERTIONS AND EXTRACTIONS.	1) CONTACT RESISTANCE: 250 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	<input type="radio"/>	-
VIBRATION	FREQUENCY 10 TO 55 Hz SINGLE AMPLITUDE 0.75 mm, - m/s ² AT 2 h, FOR 3 DIRECTIONS.	1) NO ELECTRICAL DISCONTINUITY OF 5μs. 2) CONTACT RESISTANCE: 250 mΩ MAX. 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	<input type="radio"/>	-
SHOCK	490 m/s ² DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		<input type="radio"/>	-
ENVIRONMENTAL CHARACTERISTICS				
DAMP HEAT, CYCLIC	EXPOSED AT +40 °C, 90 TO 95 %, 500 h.	1) CONTACT RESISTANCE: 250 mΩ MAX. 2) INSULATION RESISTANCE: 1 MΩ MIN. (AT HIGH HUMIDITY) 10 MΩ MIN. (AT DRY) 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	<input type="radio"/>	-
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55±3 → 5 TO 35 → 85±2 → 5 TO 35 °C TIME 30 TO 35 → 5 MAX → 30 TO 35 → 5 min MAX UNDER 5 CYCLES.	1) CONTACT RESISTANCE: 250 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PART	<input type="radio"/>	-
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	1) CONTACT RESISTANCE: 250 mΩ MAX. 2) NO HEAVY CORROSION.	<input type="radio"/>	-
RESISTANCE TO SOLDERING IRON HEAT	SOLDERING IRON TEMPERATURE, 350 ± 10°C SOLDERING TEMPERATURE 4 s MAX.			
COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
2	DIS-E-00002217	TS. ITO	TU. TANIGUCHI	20190425
REMARK		APPROVED	HO. MIWA	20060117
		CHECKED	YH. ENAMI	20060117
		DESIGNED	TU. TANIGUCHI	20060117
Unless otherwise specified, refer to JIS C 5402.		DRAWN	MT. ITANO	20060117
Note QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO.	ELC4-122138-01	
HRS	SPECIFICATION SHEET	PART NO.	TM18R-T0-88 (50)	
	HIROSE ELECTRIC CO., LTD.	CODE NO.	CL222-2883-9-50	$\triangle 1$ 1/2

Aug. 1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

REFLOW CONDITION

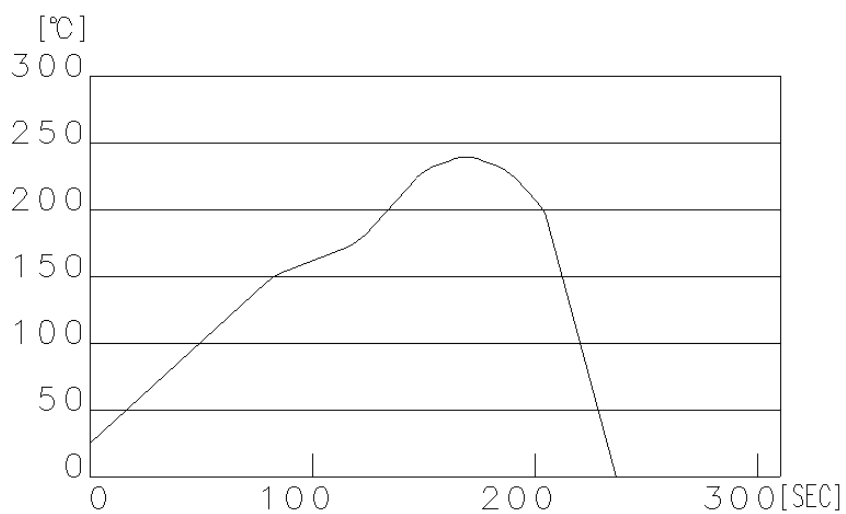

TEMPERATURE RANGE	TIME
150 TO 180	60 SEC
200 MIN	55 SEC
220MIN	40 SEC
230MIN	30 SEC
235 MIN	20 SEC
240	MOMENT

Note QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO.		ELC4-122138-01	
SPECIFICATION SHEET HIROSE ELECTRIC CO., LTD.		PART NO.		TM18R-T0-88 (50)	
		CODE NO.		CL222-2883-9-50	△ 2/2