

**Ratings**  
 Voltage: 150 V  
 Temperature: -40~70 °C

**Conductor**  
 Conductor count: 3  
 Gauge: 28 AWG 0.08 mm<sup>2</sup>  
 Material: Tinned copper strands  
 Strand size:  $\varnothing$  0.05x40  
 Resistance at 20 °C: 240 $\Omega$  /km max



**Insulator**  
 Material: HDPE  
 Color: white, black, red  
 Diameter:  $\varnothing$  0.7  $\pm$  0.10 mm  
 Nominal thickness: 0.16 mm  
 Resistance at 20 °C: 100 M $\Omega$  /km min

**Wrap**  
 Material: cotton paper

**Filler**  
 Material: aramid fiber

**Outer jacket**  
 Material: TPU  
 Color: gray  
 Diameter:  $\varnothing$  2.6  $\pm$  0.20 mm  
 Nominal thickness: 0.50 mm

**Tests**  
 Tensile strength: 26 kgf min  
 Dielectric test: 1500 V dc for 1 minute without breakdown  
 Bend test at 200 g,  $\pm$ 60 °, 30 cycles /min: 15,000 cycle minimum

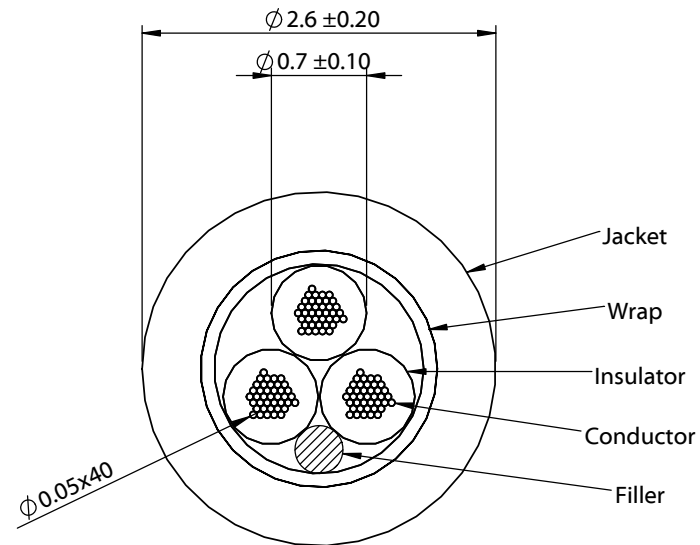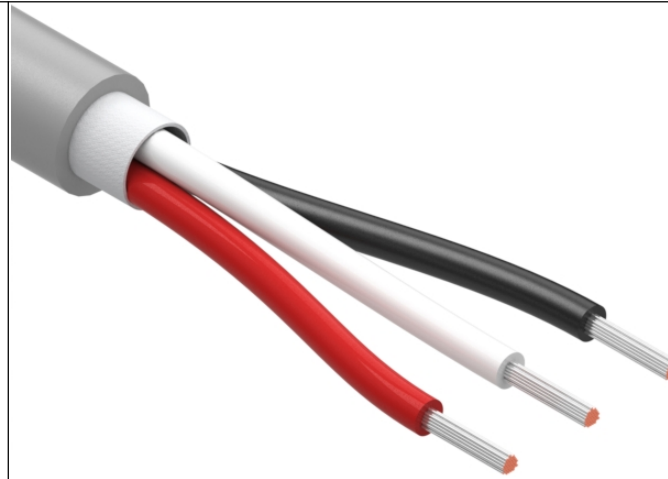

Revision:	Date:	Description:
A	9/8/2022	Initial release

Prepared: **MP**  
Digitally signed by MP Date: 2022.09.22 08:21:28 -07'00'

Verified: **PB**  
Digitally signed by PB Date: 2022.09.23 11:21:24 -07'00'

Dimensions are in millimeters.  
 Tolerances:  
 X:  $\pm$  0.5 mm  
 X.X:  $\pm$  0.3 mm  
 X.XX:  $\pm$  0.05 mm

**Notes:**  
 RoHS compliant  
 Jacket meets ISO 10993 Biological Compatibility  
 Phthalate and halogen free  
 Function test: no open, no short, no intermittent

**Description:**  
 Wire, 3C TS, 28 AWG, 150V, 70C, 2.6 mm, TPU, 75A, gray, WBL

**TENSILITY**

tel 1.541.323.3228 800 877.670.7118  
 fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	30-02715
Scale: 18:1	Sheet 1 of 1