


1	
- 1	
- 1	

FERRITE MATERIAL CHARACTERISTICS				
FERRITE MATERIAL DESIGNATION	NOISE SUPPRESSION RANGE	INITIAL PERMEABILITY @ B < 10 gauss	VOLUME RESISTIVITY OHM—CM.	
FR1	30 MHz TO 200 MHz	500 то 1500	≥10 <sup>8</sup>	

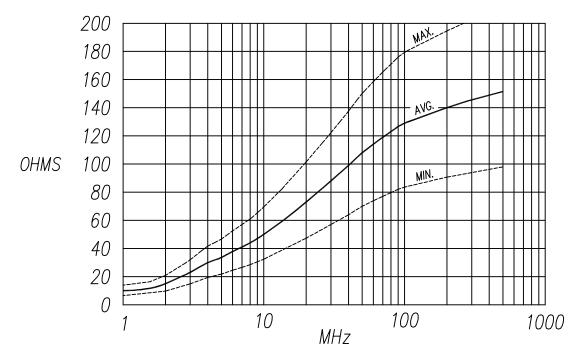


IMPEDANCE CURVE for 7288FR1 INSERT ----- AVERAGE IMPEDANCE CURVE ----- MAX. & MIN. IMPEDANCE CURVES

NOTE:

В

MAXIMUM AND MINIMUM IMPEDANCE VALUES ARE DEPENDENT ON:

- 1) HOLE POSITION WITHIN THE INSERT'S GEOMETRY, AND
- 2) FERRITE MATERIAL'S IMPEDANCE VALUE TOLERANCE OF ±25%.





11118 Susquehanna Trail South Glen Rock, PA 17327-9199 (717) 235-7512

http://www.stewartconnector.com

DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ± 1°

SHEET NO. 2 OF 2

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE

VISIT: HTTP://BELFUSE.COM/STEWART/STEWART\_PATENTS/

FERRITE INSERT, NON-FLANGE

DATE 2/2/06 DATE 2-3-05 APPD BY: DWG NO.

CT720001

**RoHS** 

AutoCAD

EIGHT CONTACT, EIGHT POSTION, SHIELDED FILTER JACK