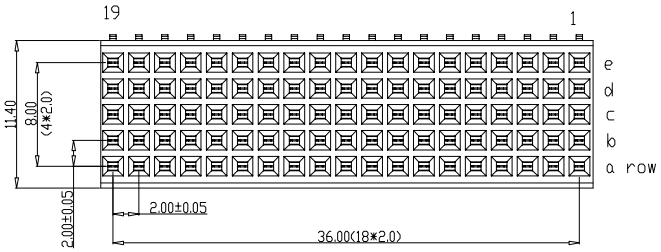



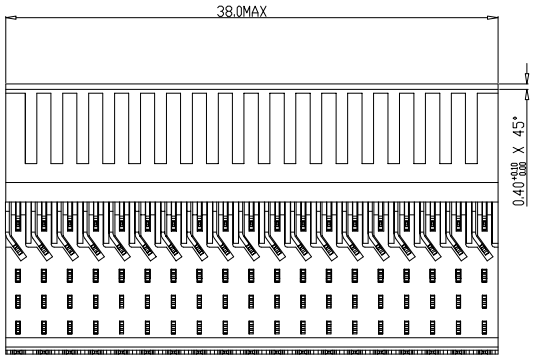

PERFORMANCE CHARACTERISTICS

CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE:500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE :20 m Ω MAX

INSERTION FORCE: 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN /CONT

INSULATION RESISTANCE: 10^4 MΩ MIN

NOTES

1.
LEAD FREE INDICATOR :LF=LEAD FREE
PERFORMANCE LEVEL INDICATIOR
(REF DWG NO.BSC .201844.003)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3 .FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001

4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

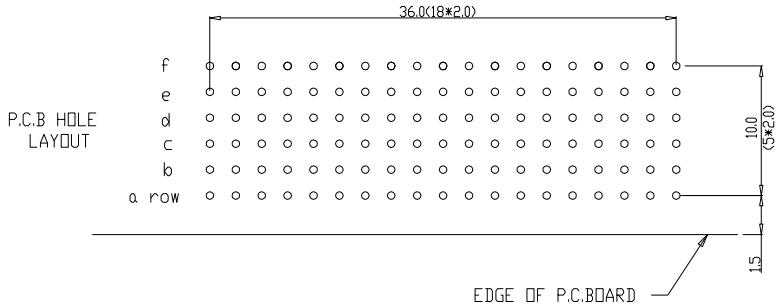

rev	ecn no	dr	date
A	CONVENSION REVISION 01	KN	14-9-01
B	I05-0093	MINI	11-06-05
C	DG05-0278	kason	02-08-05
D	DG07-0362	kason	05/09/07
E	DG10-0110	NZ	05/30/10

Material		Spec ref		
Mat code		TOLERANCE 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1°HOEKEN		MM
Heattreat				
Plating/Finish				
Dr	15 10 97	M.Fret	size A1	Scale 5.000
Eng		Product family		
Chr		Model Name	ECN	
Appr		Model Revision	REL Level	
title	MPACS 5+2R RA RCP CONN TYPE B	dwg no	BS.C .201444.027	Rev. E
Pro/E file	CAT.NO. HM2R71PA510F----	CUSTOMER DRAWING	sheet 1 of 1	

Tous droits réservés. Reproduction ou communication à des tiers interdite sans accord écrit de FCI ou de son ayant droit ou sans autorisation écrite du propriétaire.
Reproduction or communication to third parties is prohibited without written authorisation from the proprietor.
All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor.
Form, Fit, Function, Quality and Reliability