

1

2

3

4

5

6

7

A


A

B

B

C


C

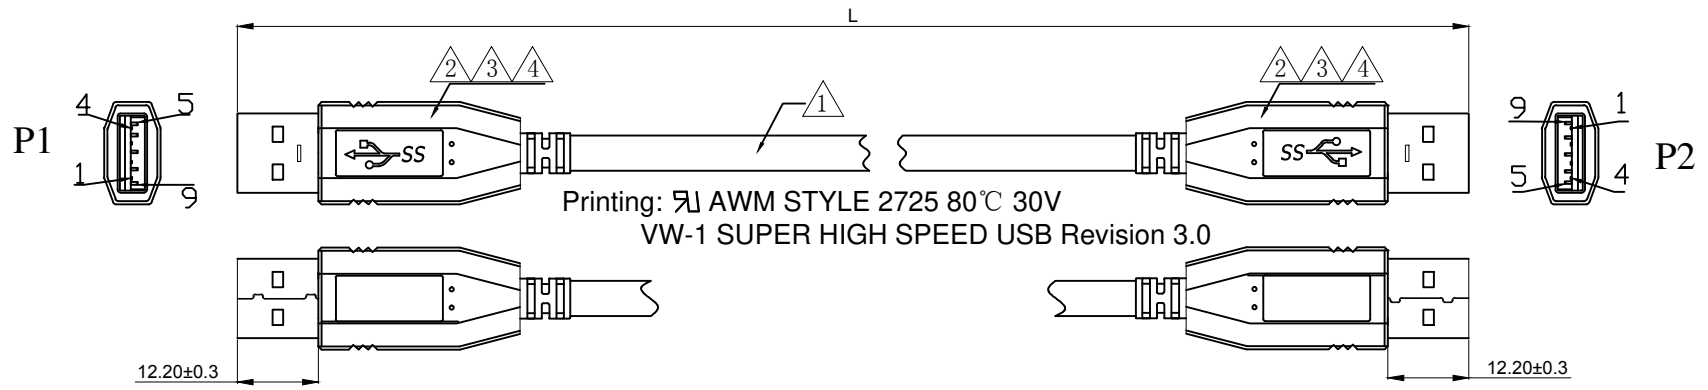

Printing: AWM STYLE 2725 80°C 30V  
 VW-1 SUPER HIGH SPEED USB Revision 3.0

① Pin Assignment

P1		P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
5	Blue	8
6	Yellow	9
7	Drain	7
8	Orange	5
9	Purple	6
	Braid	
Shell		Shell



NOTES:

1. Cable Must Be Open, Short, Miswire 100% Test
2. Voltage: 300V DC
3. Contact Resistance: 5ohms max.
4. Insulation Resistance: 10M ohms min.
5. 1Pcs/PE Bag

② WSW P/N	Length(mm)	Qty/Per Carton
A-USB30AM-30AM-050	500±20	200
A-USB30AM-30AM-100	1000±30	150
A-USB30AM-30AM-200	2000±50	100
A-USB30AM-30AM-300	3000±50	70
A-USB30AM-30AM-500	5000±50	50

NO.	TITLE	DESCRIPTION
④	Inner Mold	LDPE WHITE
③	Over Mold	PVC 45P Black
②	CONN	USB3.0 A/M, Blue PBT, PIN G/F, Shell Ni-Plated
①	CABLE	UL2725(Rev 3.0), OD:5.5mm BLACK, (1P#30+D+AL+Mylar)*2C+1P#30+2C#24+AL+B

RoHS compliant  
 Unit: mm

Scale	FREE					Date	Name	Customer-No.
TOLERANCE					Drawn	07.01.2019	Xavier	
					Approved	10.12.2019	Winnie	ASSMANN WSW-No. A-USB30AM-30AM-xxx
DIM	TOL	②	Packing quantities &PVC hardness	10.12.2019	Winnie			Drawing-No. ASS 8451 CA rev02
		①	Add wire color	07.15.2019	Xavier			Sheet
		①	Drawn	07.01.2019	Xavier			1/1
Angle	TOL	Id.	Modification	Date	Name	Replace		

1

2

3

4

5

6

7