


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/21/14	D.N.

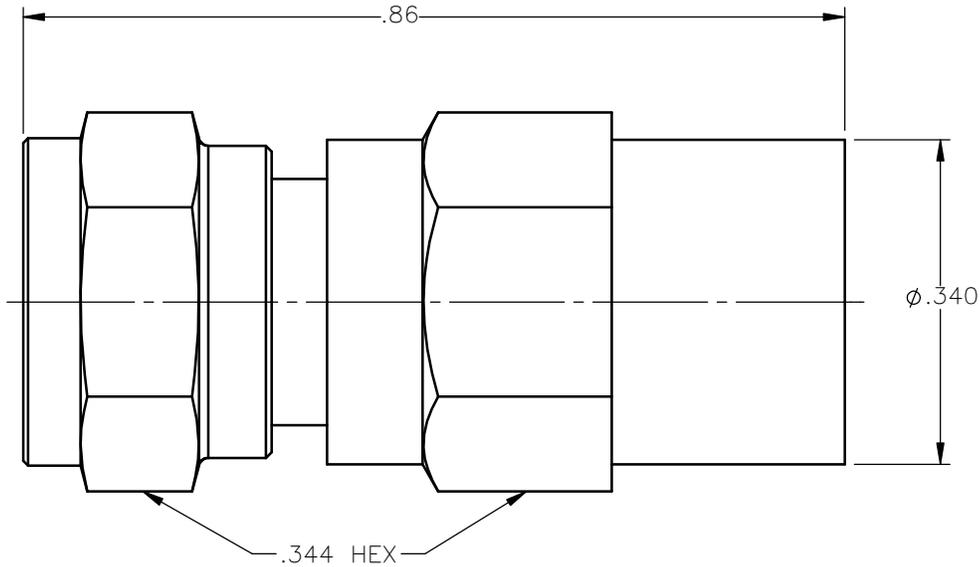


NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. RESISTOR = METAL FILM RESISTOR PER MIL-R-10509, 75 OHMS $\pm 1\%$.
4. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, EXCEPT .0001 TO .0002 THICK OVER .00005 TO .0001 THICK COPPER PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.	
	D.N.	01/21/14		
DECIMAL	ANGLE	CHKD:	DATE	75 OHM SCREW-ON FEMALE PLUG DUMMY LOAD RESISTIVE TERMINATION
		J.S.	01/21/14	
		APVD:	DATE	
REFERENCE:	MATERIALS & FINISHES:	J.M.	01/21/14	SIZE A FSCM NO. 19505 DWG NO. 1736-7511-075 REV A SCALE 5:1 THIRD ANGLE PROJECTION  SHEET 1 OF 1
ORIGINATED: D.N. DATE: 01/21/14	SEE NOTES			

1736-7511-075