

Housing - HC-B 10-TFQ-H/O2STM20G - 1412451

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing B10, for double locking latch, height 72 mm, with thread 2x M20, straight conductor exit

As illustrated but with two cable outlets



Key Commercial Data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	Germany

Technical data

General

Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Size	B10

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Degree of protection	IP65

Material data

Housing material	Aluminum die-cast
------------------	-------------------

Classifications

eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 8.0	27440202

Housing - HC-B 10-TFQ-H/O2STM20G - 1412451

Classifications

eCl@ss

eCl@ss 9.0	27440202
------------	----------

ETIM

ETIM 4.0	EC002498
ETIM 5.0	EC002498

Approvals

Approvals



Approvals

EAC



Ex Approvals



Approvals submitted




Approval details

EAC

Drawings

Dimensional drawing

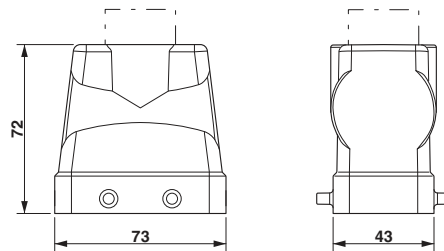

Dimensional drawing

