

т	۵	н <b>п</b>	п	D	0



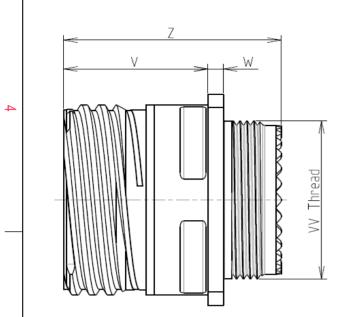

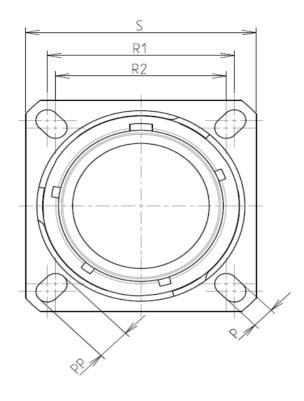

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Stainless Steel			
	-Shell Plating	: Passivated			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 500 hours			

: 28.9 g ± 10%

8D 0

G

11

Κ

22

А

F

С


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 11-22



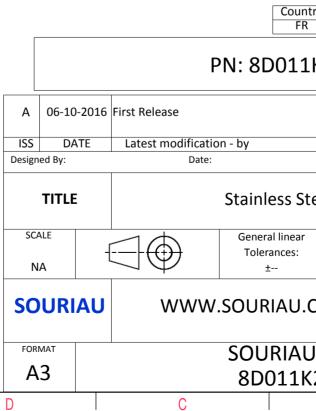

	Φ		A		_
					4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR	non-conformit ch does not co he Parties or b on, technical n Jurisd	mply with by a third part			2
	1			MOD N°	
Stee	CUSTOMER DRAWING eel Receptacle 8D series				
			59	a anti- a f	1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
K2	2AC-C			1/2	J
	В		А		

		Contact Layout				Panel Cuto SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
4	(	0 0°			22 1	R1
	Ctc A B	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905 1.005 1.005			V	
ယ	C D	-1.905 -1.905 -1.905 1.905				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend
2						Coun FR PN: 8D011
					A 06-10- ISS DA <sup>-</sup> Designed By:	2016 First Release TE Latest modification - by Date:
_					TITLE SCALE NA	Stainless St General linear Tolerances: ±
					SOURI	
	Н	G	F	E	FORMAT A3	SOURIAU 8D011k
	11	- <b>U</b>	1 I			

Т

ш

т

G

0

