

## VRM64 Series Single Output

Input Voltage: 12 Vdc  
# of Outputs: Single



### Special Features

- Meets AMD64 Processor specification
- Allows dynamic VID code changes
- 5 Bit VID input
- 0.8 Vdc to 1.55 Vdc in 25 mV steps
- Up to 100 A/ $\mu$ s load transient
- Differential remote sense for improved load regulation
- Vertical plug-in to standard motherboard connector with or without retention latch
- Output current up to 80 A continuous
- Open collector power good signal
- Monotonic turn-on and turn-off
- Fused input
- SMBus interface
- Available RoHS compliant
- 2 Year Warranty

## Electrical Specifications

Output		
Voltage adjustability:	See VID codes, Table 3	0.8 - 1.55 Vdc
Output current:		80 A
Voltage setting accuracy:	20 MHz bandwidth	$\pm$ 0.8%
Ripple and noise: (See Notes 1, 2)		50 mV pk-pk
Short circuit protection: (See Note 7)		Continuous current limit, default setting as trip
Remote sensing compensating voltage:		Up to 300 mV max
Input		
Input voltage range:	12 Vin nominal	10.8 - 13.2 Vdc
Input current:	Operation No load Remote OFF	12.54 A max. 1.1 A max. 45 mA max.
UVLO:	Turn ON voltage Turn OFF voltage Hysteresis	10.5 V typ. 9.8 V typ. 0.65 V typ.
Start-up time:	Nominal line	10 ms max.
Enable	Logic compatibility ON OFF	Ref. to -input > 1.7 Vdc < 0.8 Vdc
+5_ALWAYS	Current demand	250 mA typ.

## Specifications

Unless otherwise stated, all specifications are typical at nominal input, maximum continuous rated load at 25 °C and voltages are referenced to Vin-

General Characteristics		
Efficiency:	1.5 V output @ 60 A	84% typ.
Switching frequency:	Fixed (See Note 4)	830 kHz
Material flammability:		UL94V-0
Weight:		< 52 g (< 2 oz)
MTBF:	Telcordia SR-332	> 2,000,000 hours
Mating connector: (See Table 1 for pin out)	Tyco/Elcon	283-0172-01303
Connector fingers:		Gold plated, 30 μ-inches
Environmental Specifications		
Maximum temperature shock:	Operating	5 °C/10 min.
Temperature shock:	Operating Non-operating	10 °C/hour 20 °C/hour
Humidity: (Non-condensing)	Operating Non-operating	85% RH 95% RH
Altitude:	Operating Non-operating	10,000 feet max. 50,000 feet max.
Shock:	Operational and non-operational	30G 11 ms Half sine wave
Vibration: (See Note 8)	Operational and non-operational	0.02 G <sup>2</sup> /Hz max.
Electrostatic discharge: IEC61000-4-2 (See Note 6)	Indirect air Indirect contact	15 kV 8 kV
Thermal performance: (See Note 5)	Operating ambient temperature Non-operating	0 °C to +60 °C -40 °C to +100 °C

### Ordering Information

Input Voltage	Output Voltage	OVP	Output Current		Efficiency (typ)	Regulation Load	Model Numbers <sup>(10, 11)</sup>
			Min	Max			
12 Vdc	0.8 - 1.55 Vdc	2.2 Vdc	0 A	80 A	84%	50 mV	VRM64-80-12-UY
12 Vdc	0.8 - 1.55 Vdc	2.2 Vdc	0 A	80 A	84%	50 mV	VRM64-80-12-UJ

Pin Connections			
Pin No.	Function	Pin No.	Function
1	GND	54	+12 Vin
2	GND	53	+12 Vin
3	GND	52	+12 Vin
4	VID4	51	VID3
5	VID2	50	VID1
6	VID0	49	Current Share
7	COREFB H	48	COREFB L
8	PWRGD	47	CB <sub>OUT</sub>
9	Enable	46	ADD 0
10	SM <sub>DA</sub>	45	ADD 1
11	SM <sub>CL</sub>	44	-VRMPRES
12	SGND	43	+5 V <sub>always</sub>
13	V <sub>DD</sub> Core +	42	V <sub>DD</sub> Core +
14	V <sub>DD</sub> Core +	41	V <sub>DD</sub> Core +
15	V <sub>DD</sub> Core +	40	V <sub>DD</sub> Core +
16	GND	39	GND
17	GND	38	GND
18	GND	37	GND
19	V <sub>DD</sub> Core +	36	V <sub>DD</sub> Core +
20	V <sub>DD</sub> Core +	35	V <sub>DD</sub> Core +
21	V <sub>DD</sub> Core +	34	V <sub>DD</sub> Core +
22	V <sub>DD</sub> Core +	33	V <sub>DD</sub> Core +
23	V <sub>DD</sub> Core +	32	V <sub>DD</sub> Core +
24	V <sub>DD</sub> Core +	31	V <sub>DD</sub> Core +
25	GND	30	GND
26	GND	29	GND
27	GND	28	GND

**Table 1: Pin Connections**

Voltage Identification (VID) Codes					
VID4	VID3	VID2	VID1	VID0	VDAC
1	1	1	1	1	Off
1	1	1	1	0	0.800
1	1	1	0	1	0.825
1	1	1	0	0	0.850
1	1	0	1	1	0.875
1	1	0	1	0	0.900
1	1	0	0	1	0.925
1	1	0	0	0	0.950
1	0	1	1	1	0.975
1	0	1	1	0	1.000
1	0	1	0	1	1.025
1	0	1	0	0	1.050
1	0	0	1	1	1.075
1	0	0	1	0	1.100
1	0	0	0	1	1.125
1	0	0	0	0	1.150
0	1	1	1	1	1.175
0	1	1	1	0	1.200
0	1	1	0	1	1.225
0	1	1	0	0	1.250
0	1	0	1	1	1.275
0	1	0	1	0	1.300
0	1	0	0	1	1.325
0	0	1	1	1	1.350
0	0	1	1	1	1.375
0	0	1	1	0	1.400
0	0	1	0	1	1.425
0	0	1	0	0	1.450
0	0	0	1	1	1.475
0	0	0	1	0	1.500
0	0	0	0	1	1.525
0	0	0	0	0	1.550

**Table 2: Voltage Identification (VID) Codes**

### Signal Electrical Interface

Characteristic - Signal Name	Symbol	MIN	TYP	MAX	UNITS	NOTES AND CONDITIONS
ENABLE - on	ENABLE <sub>(on)</sub>	1.7		5.5	V	No pull up resistor provided by the VRM
ENABLE - off	ENABLE <sub>(off)</sub>	-0.3		0.8	V	No pull up resistor provided by the VRM
PWRGD - high	V <sub>PWRGD (high)</sub>	1.7			V	No pull up resistor provided by the VRM
PWRGD - low	V <sub>PWRGD (low)</sub>	-0.3		0.8	V	Open-collector output to not more than 5.5 V, max current 5 mA
PWRGD - low threshold			150		mV	Below VID setting
PWRGD - turn-on response to ENABLE going high	T <sub>rise</sub>	2	2.5	10	ms	For waveforms, refer to Application Note 185
VID - high	V <sub>ih (VID)</sub>	1.7		5.5	V	
VID - low	V <sub>il (VID)</sub>	-0.3		0.8	V	
OVP1 (See Note 7)			2.2		V	Default setting is trip. At OVP1 or OVP 2 whichever is smaller
OVP2 (See Note 7)			133		%	Of VID Setting
OVP drive voltage	CB_OUT		4		V	
SMBus Address high	ADD_x (high)	3.8			V	
SMBus Address low	ADD_x (low)	-0.3		0.7	V	
SMBus Data high	SM <sub>DA</sub> (high)	2.1		5.5	V	
SMBus Data low	SM <sub>DA</sub> (low)	-0.3		0.8	V	

### Electromagnetic Compatibility

Characteristic - Signal Name	Symbol	MIN	TYP	MAX	UNITS	NOTES AND CONDITIONS
ESD - Indirect air				15	kV	EN61000-4-2 In end user equipment
ESD - Indirect contact				8	kV	EN61000-4-2 In end user equipment
Input characteristics Input current - operating	I <sub>IN</sub>		12		A	V <sub>IN</sub> = V <sub>IN</sub> (typ) I <sub>out</sub> (cont.) = 80 A, VID = 1.5 V
Input capacitance - external bypass	C <sub>INext</sub>		1600		μF	

#### Notes:

- 1 Recommended output capacitance, 48 x 22 μF ceramic MLCC.
- 2 50 mV pk-pk ripple. V<sub>in</sub> = 12 V, V<sub>out</sub> = 1.5 V, I<sub>out</sub> = 80 A.
- 3 With the recommended capacitors (See Note 1) across the output, the output voltage stays within the load regulation window for all loads and transient events, up to 80 A. It will also allow instantaneous VID-on-the-fly changes of up to 500 mV at 80 A.
- 4 VRM64 uses a five phase buck topology. Each phase switches at 830 kHz. This gives an equivalent switching frequency of 4.2 MHz
- 5 Maximum current requires adequate forced air over the converter. Please consult Figure 1 for thermal derating.
- 6 When the VRM detects an output over-voltage event, the OVP pin transitions to logic high. This signal can be used to shut down the supply to the VRM, or drive an external crowbar device.
- 7 These are default settings. The current limit may be set to 'trip' or 'hiccup'. The output overvoltage limits, input overvoltage and undervoltage settings, the output droop and offset, the current limit setpoint and many others can be changed by component changes. Please consult the factory for details.
- 8 0.01 G<sup>2</sup>/Hz from 5 Hz to 20 Hz, maintaining 0.02 G<sup>2</sup>/Hz from 20 Hz to 500 Hz, all axes.
- 9 In accordance with AMD requirements, PWRGD will go high at least 2 ms after VDD settles within specifications.
- 10 The 'Y' suffix indicates that these parts are TSE RoHS 5/6 (non Pb-free) compliant. Pb-free (RoHS 6/6) compliant versions are "J" suffix.
- 11 NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.PowerConversion.com> to find a suitable alternative.

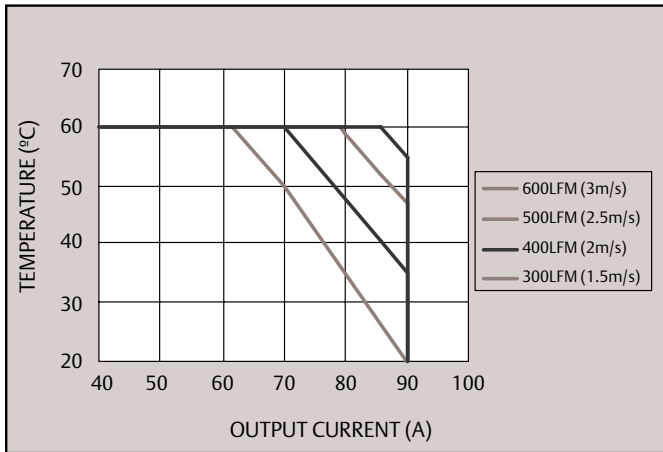


Figure 1: Typical Thermal Derating At Sea Level  
(12 Vin, 1.5 Vout)

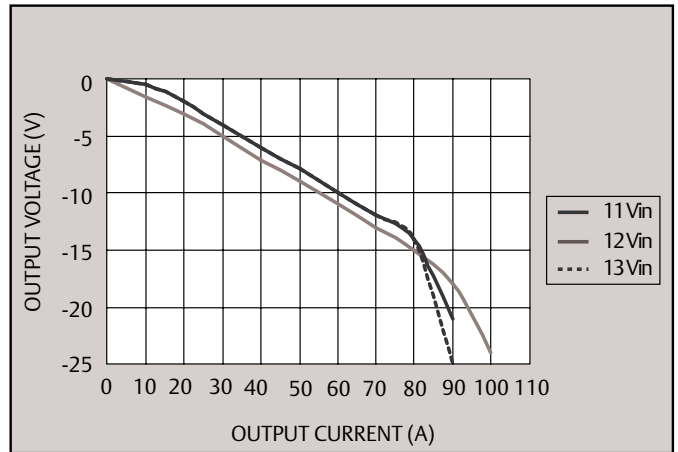


Figure 2: Load Regulation

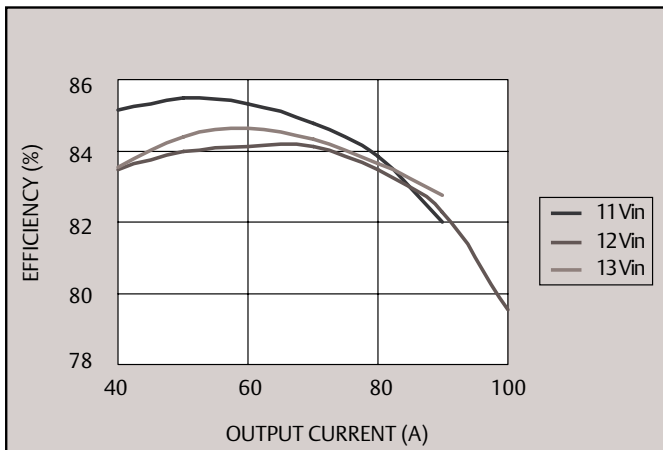


Figure 3: Typical Efficiency Vs Load

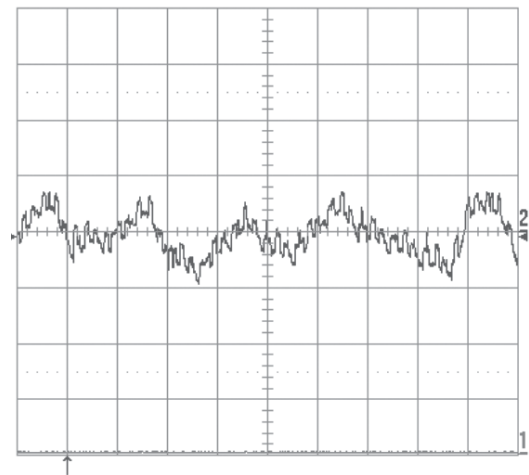


Figure 4: Output Ripple and Noise  
10 mV Per Square, 2 μs Per Square

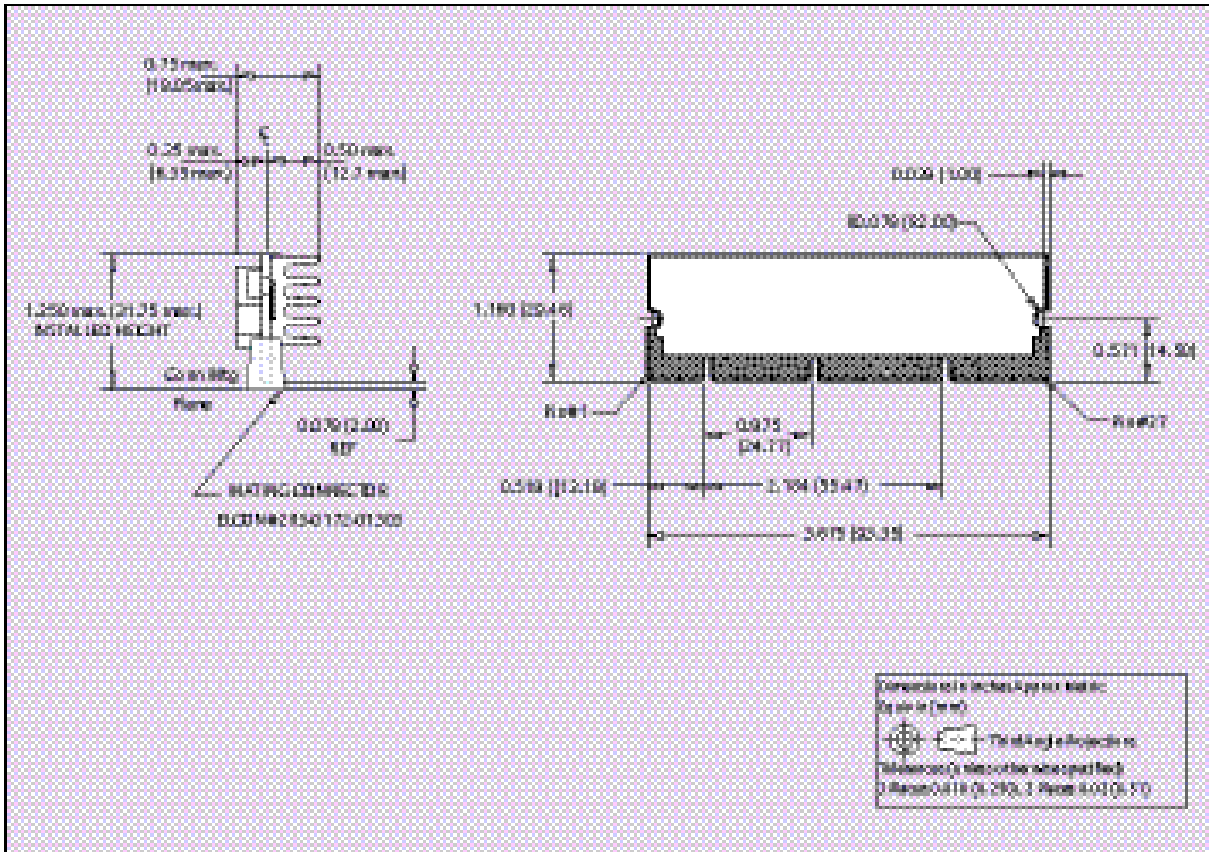


Figure 5: Mechanical Drawing

### **Americas**

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

### **Europe (UK)**

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

### **Asia (HK)**

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

**[www.PowerConversion.com](http://www.PowerConversion.com)**  
**[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)**

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

**[EmersonNetworkPower.com](http://EmersonNetworkPower.com)**

Emerson and the Emerson Network Power logo are trademarks of Emerson Electric Co.  
©2012 Emerson Electric Co.  
All rights reserved.