




Nickel/Copper Polyester Taffeta

Flectron® Nickel/Copper Polyester Taffeta is a unique fabric, manufactured using a patented, proprietary technology. This technology combines highly conductive copper and corrosion resistant nickel with the lightweight, flexibility, conformability, strength and uniform appearance of a woven. Nickel/Copper Polyester Taffeta offers excellent surface conductivity, shielding effectiveness, and reflectivity for a variety of applications.

Product No: 3035-213 Shielding Effectiveness(ASTM D4935)

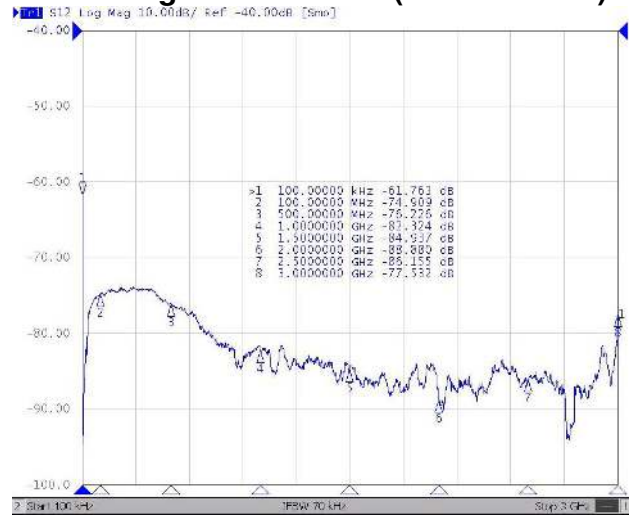

Electrical Properties

Property	Units	Value
Surface Resistivity (ASTM F390)	ohms/square	≤ 0.07
Far-field Shielding Effectiveness (typical)		
At 100 MHz	dB	75
At 1 GHz	dB	82
At 3 GHz	dB	76

Physical Properties

Property	Units	Value	Advantage
Substrate		Polyester Taffeta	Flexible, Breathable, Conformable
Metal		Ni/Cu	Highly Conductive, Corrosion Resistant
Basis Weight	oz./yd. ² g/m. ²	2.2 – 3.1 75– 105	Light Weight
Thickness, (nominal) (ASTM D1777)	Inches microns	0.0045 114	Thin and Flexible
Metal Weight	oz./yd. ² g/m. ²	0.70 – 1.30 24-44	Excellent Electrical Properties
Max Short Duration Temperature		210°C	Allows Thermal Processing

Mechanical Properties

Property	Units	Value
Tensile Strength		
CD/MD \diamond (ASTM D5035)	lb./in N/100mm	50/75 0.7
Elongation, MD (ASTM D5035)		27%

ⁿ Typical values for greige fabric.
 \diamond Cross Machine Direction/Machine Direction

FLECTRON® Nickel/ Copper Polyester Taffeta can be used in many different configurations to protect against EMI/RFI for a variety of applications and environments. Typical applications include: enclosures, curtains, gaskets, cable wrap, tapes, shielding, laminates, and grounding.

NOTICE: Although the information and recommendations set forth herein (hereinafter "Information") are presented in good faith and believed to be correct as of the date hereof, Laird Technologies makes no representations as to the completeness or accuracy thereof. Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Laird Technologies be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information. Nothing contained herein is to be construed as a recommendation to use any product, process equipment or formulation in conflict with any patent, and Laird Technologies makes no representation or warranty, express or implied, that the use there-of will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS.