



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16				
		D	REVISED PER ECO-05-013873	16NOV05	BM JL

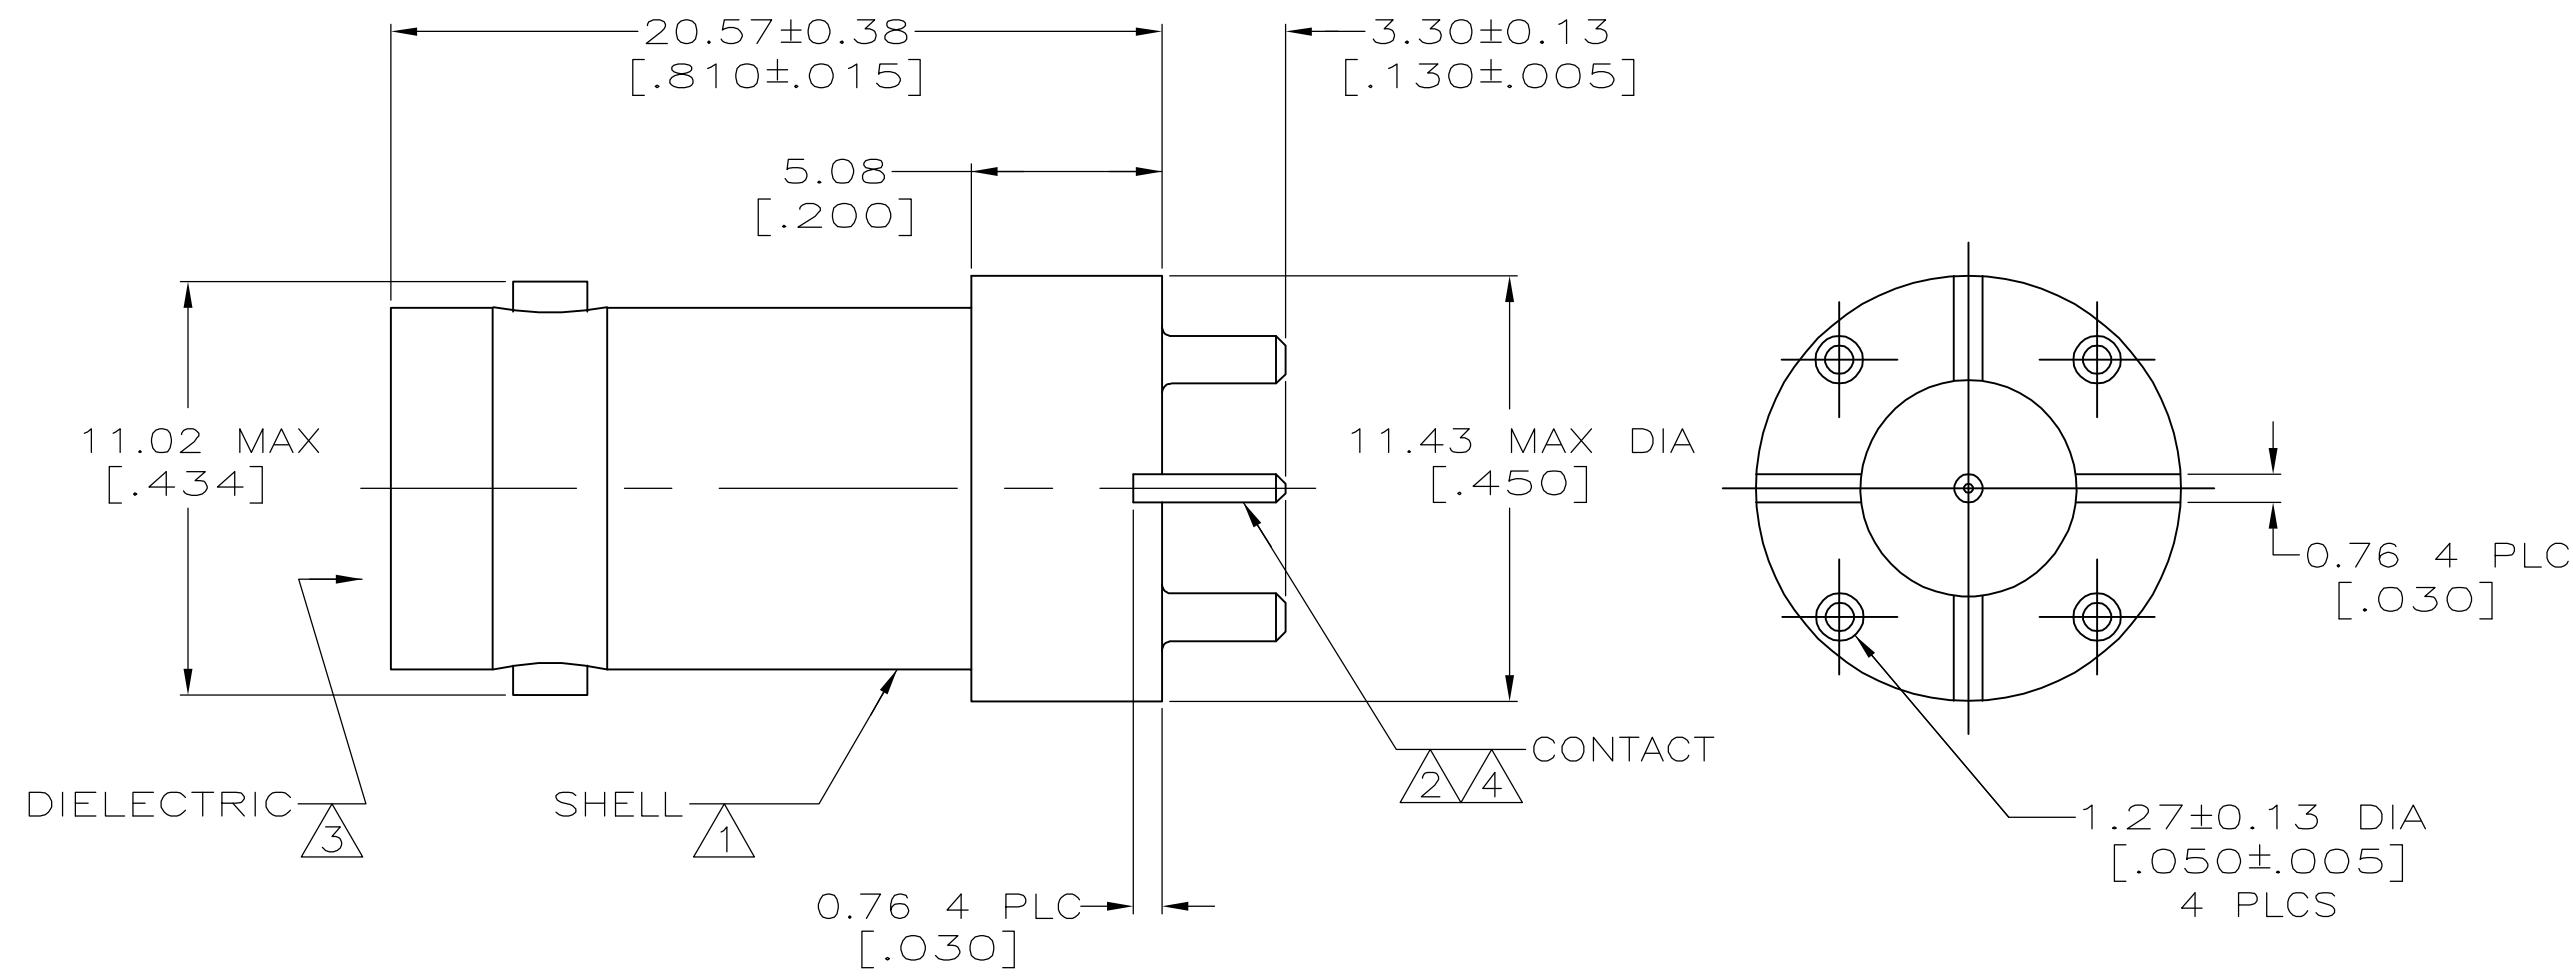

- 1 ZINC PER QQ-Z-363
- 2 BERYLLIUM COPPER PER ASTM-B-196
- 3 PTFE PER MIL-P-19468
- 4 GOLD PLATE PER MIL-G-45204  
0.76 μm [.000030] MINIMUM THICK.
- 5 TIN-LEAD PLATE PER ASTM-B-545,  
3.04 μm [.000120] MINIMUM THICK.
- 6 NICKEL PLATE PER QQ-N-290  
5.08 μm [.000200] MINIMUM THICK.
- 7. SEE INSTRUCTION SHEET 408-9889.

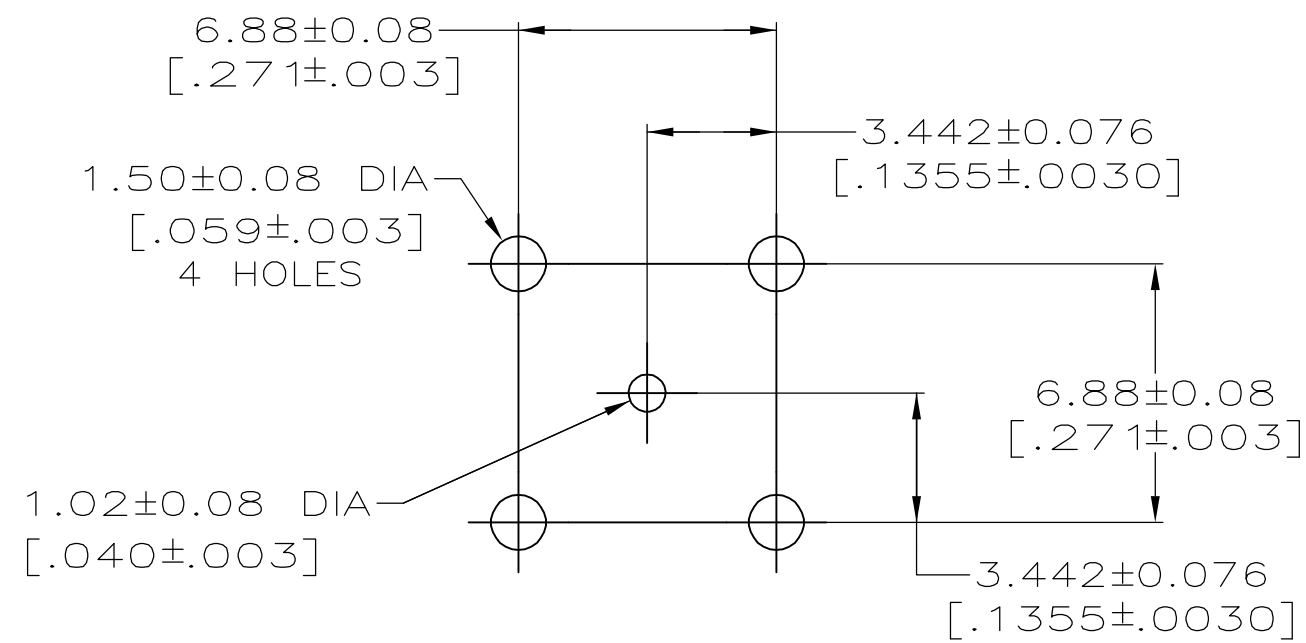

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J. LIPPERT	1-19-99	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK	J. LIPPERT	3-11-99				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	J. LIPPERT	3-11-99				
0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH SEE NOTES 4, 5		PRODUCT SPEC	108-12078					
MATERIAL SEE NOTES 1 - 3		APPLICATION SPEC	-		NAME	JACK, VERTICAL, PCB, 75 OHM, COMMERCIAL BNC		
		WEIGHT	-		SIZE	A2		
		RESTRICTED CUSTOMER		SCALE	5:1	SHEET	1 of 1	
				DRAWING NO	C=1274291		RESTRICTED TO	-
				CAGE CODE	00779		REV	D