


molex

INSULATION DISPLACEMENT CABLE: 0.0394" PITCH, 28 AWG, STRANDED EXTRUDED FEP

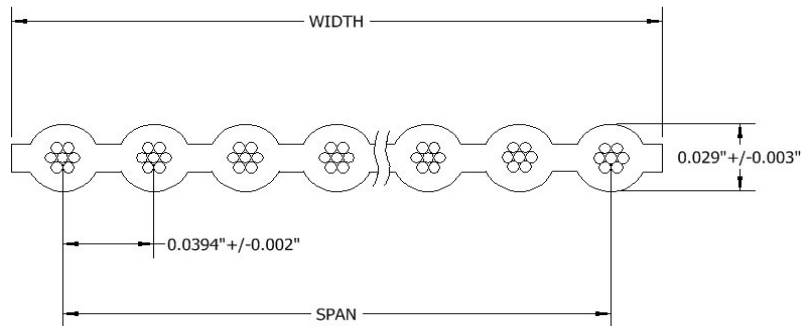

Cond. No.	Part Number	Span	Width
4	1000570197	0.118" ± 0.005"	0.158" ± 0.007"
5	1000570424	0.158" ± 0.005"	0.197" ± 0.007"
6	1000570082	0.197" ± 0.007"	0.237" ± 0.007"
8	1000570218	0.276" ± 0.007"	0.315" ± 0.007"
10	1000570140	0.354" ± 0.007"	0.394" ± 0.007"
10	1000570141	0.354" ± 0.007"	0.394" ± 0.007"
12	1000570145	0.433" ± 0.007"	0.472" ± 0.007"
12	1000570146	0.433" ± 0.007"	0.472" ± 0.007"
14	1000570149	0.512" ± 0.007"	0.551" ± 0.007"
14	1000570426	0.512" ± 0.007"	0.551" ± 0.007"
16	1000570155	0.590" ± 0.007"	0.630" ± 0.007"
16	1000570156	0.590" ± 0.007"	0.630" ± 0.007"
20	1000570161	0.748" ± 0.010"	0.787" ± 0.010"
20	1000570162	0.748" ± 0.010"	0.787" ± 0.010"
24	1000570168	0.906" ± 0.010"	0.945" ± 0.010"
26	1000570173	0.984" ± 0.010"	1.024" ± 0.010"
26	1000570174	0.984" ± 0.010"	1.024" ± 0.010"
30	1000570179	1.142" ± 0.010"	1.181" ± 0.010"
30	1000570180	1.142" ± 0.010"	1.181" ± 0.010"
34	1000570185	1.299" ± 0.010"	1.338" ± 0.010"
34	1000570474	1.299" ± 0.010"	1.338" ± 0.010"
40	1000570192	1.535" ± 0.010"	1.575" ± 0.010"
40	1000570193	1.535" ± 0.010"	1.575" ± 0.010"
44	1000570200	1.693" ± 0.010"	1.732" ± 0.010"
44	1000570201	1.693" ± 0.010"	1.732" ± 0.010"
50	1000570202	1.929" ± 0.010"	1.968" ± 0.010"
50	1000570203	1.929" ± 0.010"	1.968" ± 0.010"

CHARACTERISTICS	
Conductor	28 AWG, 7/36, Silver Plated Copper
Insulation	FEP
Color	Blue Or Blue with Blue Polarity Stripe
Impedance (ohms)	105 Unbalanced
Capacitance (pF/ft)	11.5 Unbalanced
Inductance (uH/ft)	0.12 Unbalanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	-55°C to 200°C

STANDARD PACKAGING
100 ft./spool, 10 Ft. minimum length

UL STYLE 20424