



# OA60EC IP68-ATEX Series



EC Fan Universal voltage  
60x25mm (2.36"x 1.0")

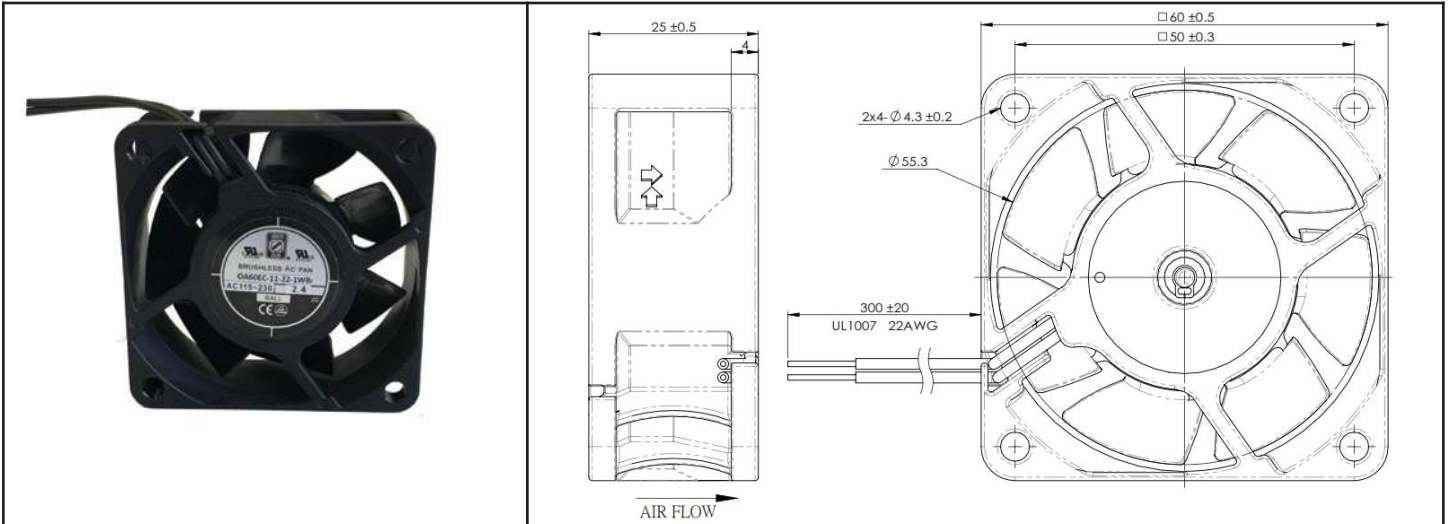

Frame	PBT UL94V-0 Plastic	<u>Operating Temperature</u> Ball Bearing -20C ~ +70C  <u>Life Expectancy</u> Ball Bearing 50,000 hours (L10 at 40C)  IP68 Rating with ATEX Certification  Weight: ~60 grams  Storage Temperature -30C ~ +75C  m2
Impeller	PBT UL94V0- Plastic	
Connection	2 Lead wires	
Motor	Brushless EC motor, thermally protected	
Bearing System	Dual ball	
Insulation Resistance	>10M ohm between lead-wire and frame (500VDC)	
Dielectric Strength	1 sec at 1800 VAC, 50/60Hz	

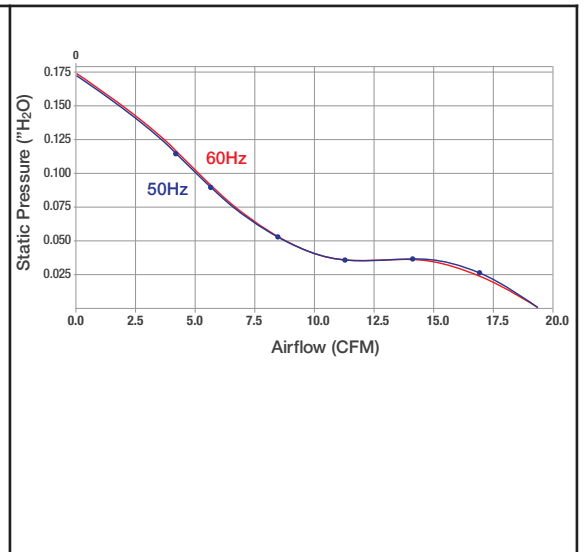

Part Number	OA60EC-UR-1WBIP68A
Nominal Voltage	95-264 VAC
Rated Power	2.1W/2.4W (115/230VAC)
Locked Rotor Current	0.09/0.05A (115/230VAC)
Frequency (Hz)	50 / 60
Rated Speed (RPM)	3950
Airflow (CFM)	19.5
Noise Level (dB)	31
Max. Static Pressure	0.17" H <sub>2</sub> O