
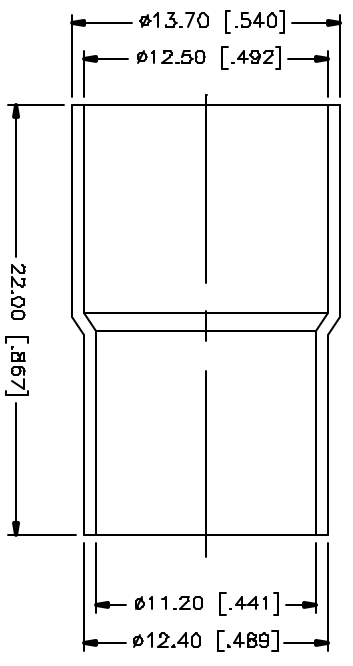
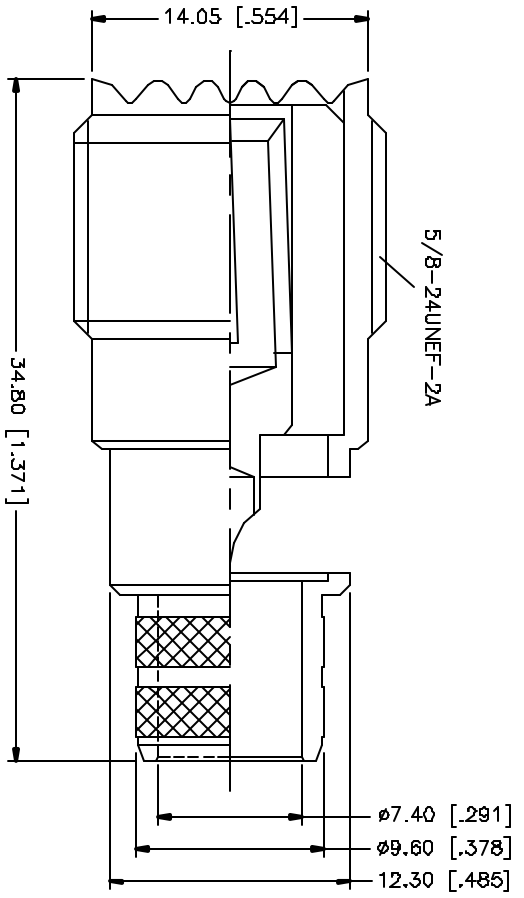


REV.	DATE	DESCRIPTION
NC	01/09/06	INITIAL RELEASE

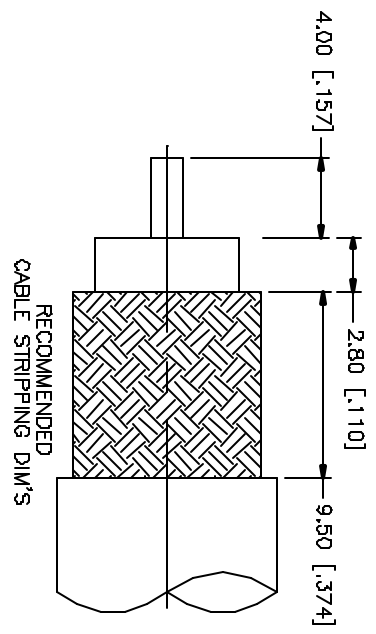

- NOTE:
1. CRIMPED FERRULE  
HEX CRIMP SIZE .429"
  2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION	PART NO.	DWG. NO.	NO.	NC	SIZE	SCALE	
8								<b>Amphenol Connex</b> UHF CRIMP JACK (FOR RG-8/U CABLE) 182335	182335	182335.DWG	NC	NC	A	NA	
7															
6															
5															
4	FERRULE	COPPER	NICKEL	1											
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	DELFIN	NATURAL	1											
1	BODY	BRASS	NICKEL	1											
UHFERRING SPECIFIED MATERIALS ARE INDICATED FOR DISCREET REVISIONS ONLY. UHFERRING SPECIFIED MATERIALS ARE: TECHNICAL SPECIFICATIONS: A - 30mm ± 0.20mm B - 34mm ± 0.40mm C - 120mm ± 0.50mm UHFERRING SPECIFIED MATERIALS ARE: TECHNICAL SPECIFICATIONS: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"															
DESCRIPTION					MATERIAL	FINISH	QTY	C:/182/182335.DWG							