


ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

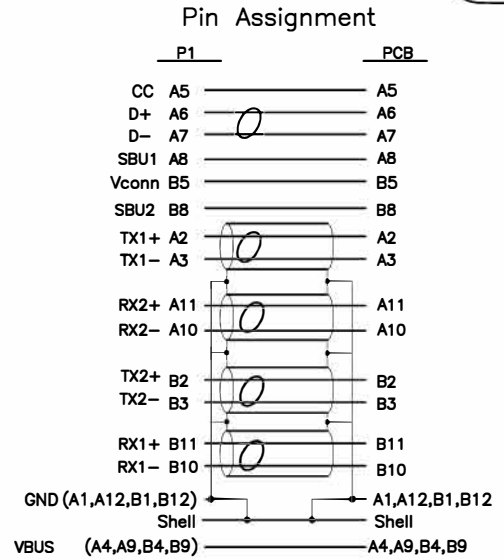

NO	DESCRIPTION	Q'TY	UNIT	REV.	ECN NO.	DESCRIPTION	DATE	CHANGER
8	45P PVC Color:White	10	g					
7	Transparent PE	2	g					
6	USB3.1 TYPE C Tinplate Shell Nickel Plated	1	pcs					
5	USB3.1 TYPE C ABS Shell Color:White	1	pcs					
4	USB3.1 C Type Connector With PCB Shell Nickel Plated	1	pcs					
3	DP F ABS Shell Color:White	1	pcs					
2	With PCB(IC:VL100 ,PI3DPX1203)	1	pcs					
1	USB3.1 [34AWG (7/0.06TC)+EAM]*4P+34AWG (7/0.06TC)*2C+28AWG (7/0.127TC)*2C+34AWG (7/0.06TC)*4C+AB (16/9/0.06 75%TC)OD3.9MM Color:White	0.16	m					

REV.	ECN NO.	DESCRIPTION	DATE	CHANGER
		TOLERANCE INCHES M/M		
		.X .015 .30		
		.XX .010 .10		
		.XXX .005 .05		
		TITLE: USB 3.1 TYPE C TO DP F		
		CUSTOMER :		
		CUSTOMER P/N :	USBC-DPF-ADPT	
		CHECK BY	SCALE NONE	DRAWING NO.:
		APPD BY	UNIT MM	REV. A01
			DATE 2017.08.25	1/1