

CODE 78 - HEAT SHRINK BOOT BACKSHELL




225M318-19C-D

SERIES _____
 ORDER NUMBER (TABLE 1) _____
 MATERIAL _____
 REFER TO CH00-0250-004
 FINISH _____
 REFER TO CH00-0250-004
 MODIFICATION CODE _____
 REFER TO CH00-0250-004 (2)

NOTES:

1. THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- (2) FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004.
3. ADAPTOR TO BE PERMANENTLY MARKED/BAGGED AND LABELLED WITH CODE IDENTIFICATION NUMBER AND PART NUMBER. (e.g. 06090-225M312-19B).
- (4) KNURL INSIDE BOOT GROOVE MAY BE SUPPLIED AT MANUFACTURER'S OPTION.
5. ADAPTOR MATES TO BS9522 F0032 (PATT121B) CONNECTORS; ONLY MANUFACTURED BY AB CONNECTORS LTD. SEALING IS ONLY ACHIEVED WHEN USING GROMMETS ABB-**-**-GAC-***, SUPPLIED BY AB CONNECTORS

If this document is printed it becomes uncontrolled. Check for the latest revision

DRAWN	K.WINCZURA	DATE	17/06/2015	 3RD ANGLE PROJECTION NOT TO SCALE	TITLE:	HEAT SHRINK BOOT BACKSHELL	 			
CHECKED		DATE	17/06/2015							
APPROVED	K.SHEPPARD	DATE	22/06/2015		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1°	ASSY USED ON:		BS9522 F0032 (PATT 121B) CONNECTORS		
APPROVED	H.SMITH	DATE	24/06/2015							
REVISIONS										
LTR	DESCRIPTION	DATE	APPROVED							
G	REVISED PER ECN AD94013	04/08/1993	J.KUSTER							
H	REVISED PER ECO-15-009389	24/06/2015	H.SMITH							
TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792					TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.			DRAWING NO: 225M3XX	DRAWING REV: H	SHT 1

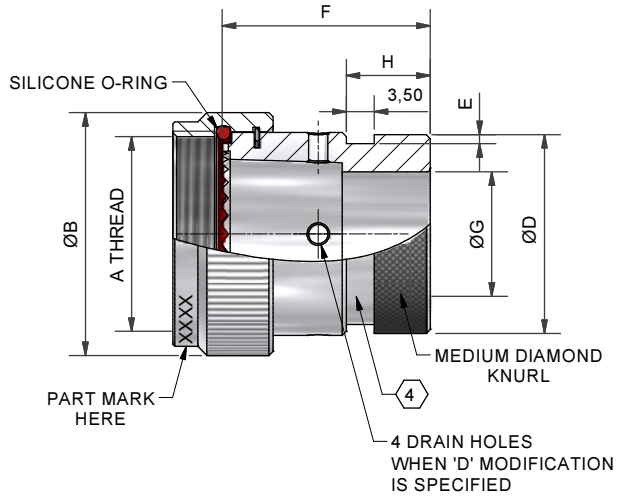






TABLE 1

BASE PART NUMBER	SHELL SIZE	A THREAD	ØB MAX	ØD MAX	E +0,20/-0,00	F	ØG MIN	H MAX
225M312	10SL, 12S	5/8-24UNEF	20,3	15,4	1,12	26,0	7,8	10,80
225M314	14S	3/4-20UNEF	23,7	19,2	1,12	26,0	10,8	10,80
225M316	16, 16S	7/8-20UNEF	26,7	20,9	1,12	26,0	13,3	10,80
225M318	18	1-20UNEF	30,3	24,8	1,12	26,0	15,3	10,80
225M320	20	1 1/8-18UNEF	35,3	31,2	1,75	26,0	18,3	10,80
225M322	22	1 1/4-18UNEF	38,3	34,8	1,75	26,0	21,8	10,80
225M324	24	1 3/8-18UNEF	41,3	36,8	1,75	26,0	25,3	10,80
225M328	28	1 5/8-18UNEF	47,8	43,8	1,75	26,0	30,8	14,91
225M332	32	1 7/8-16UN	54,2	48,8	2,20	30,0	36,8	14,91
225M336	36	2 1/16-16UNS	62,2	57,8	2,20	30,0	40,8	14,91

If this document is printed it becomes uncontrolled. Check for the latest revision

DRAWN	K.WINCZURA	DATE	17/06/2015	 3RD ANGLE PROJECTION NOT TO SCALE	TITLE: HEAT SHRINK BOOT BACKSHELL	 Polamco 		
CHECKED		17/06/2015						
APPROVED	K.SHEPPARD	22/06/2015	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0,25MM ANGULAR +/- 1°					
APPROVED	H.SMITH	24/06/2015						
REVISIONS					ASSY USED ON: BS9522 F0032 (PATT 121B) CONNECTORS			
LTR	DESCRIPTION	DATE	APPROVED					
G	REVISED PER ECN AD94013	04/08/1993	J.KUSTER					
H	REVISED PER ECO-15-009389	24/06/2015	H.SMITH					
TE CAGE CODE: 06090 POLAMCO/TE CAGE CODE: U5792					TE CONNECTIVITY - POLAMCO LTD RESERVES THE RIGHT TO AMEND THIS DRAWING AND THE INFORMATION SET FORTH HEREON AT ANY TIME. USERS SHOULD INDEPENDENTLY EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.	DRAWING NO: 225M3XX	DRAWING REV: H	SHT 2